

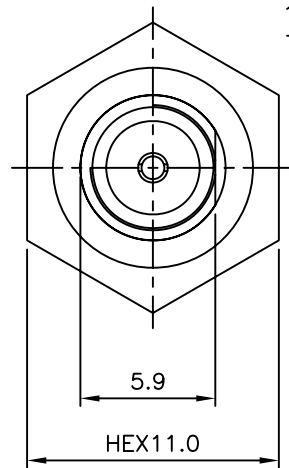


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2020.09.09.
1	BONDING TUBE 추가 (영업팀 요청)	S.Y.EUN	I.C.KIM	2020.12.01.


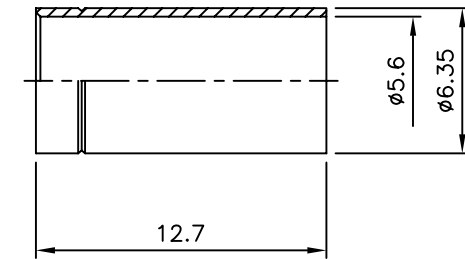


1/4-36 UNS-2A

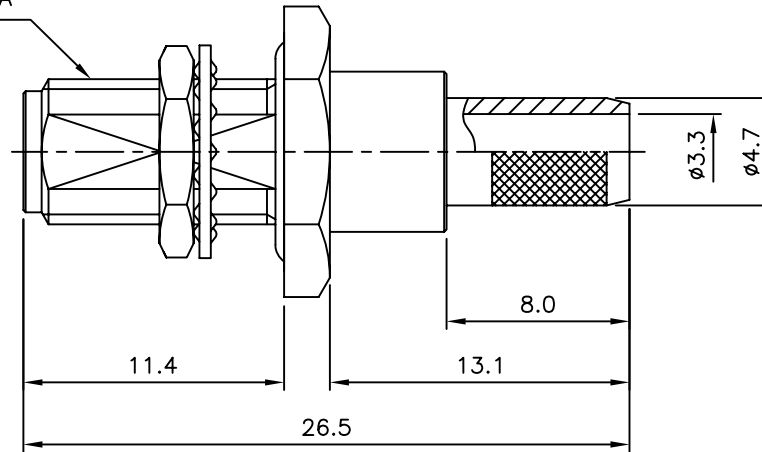

* ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~5.8GHz
3. VSWR : 1.3(Max)
4. INSERTION LOSS : 0.6dB (Max)

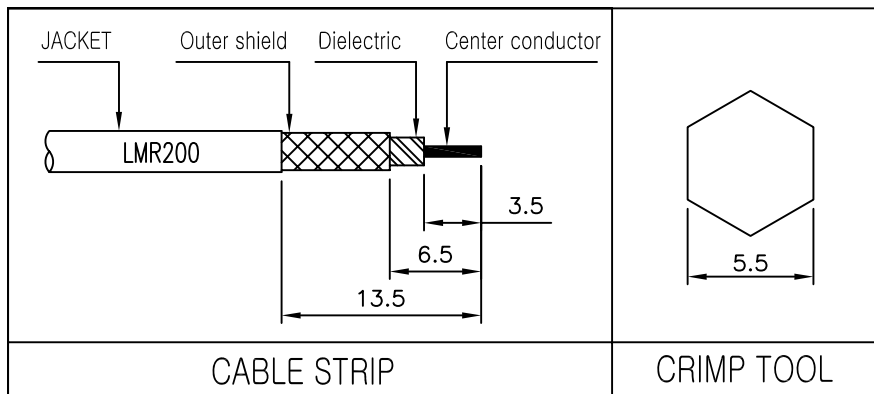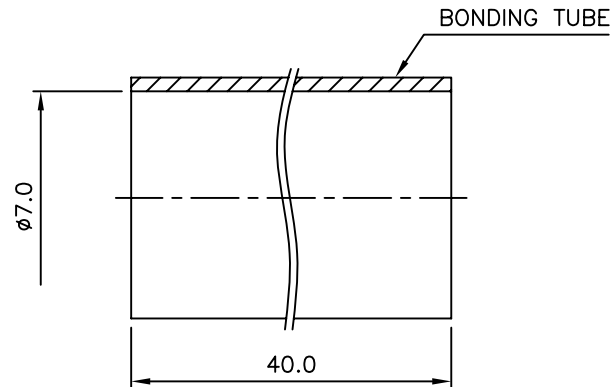

8	BONDING TUBE	1	—	—	ATU00350-N/1
7	GASKET	1	SILICONE	RED	DGK00023-N/2
6	WASHER	1	BsS	Nickel Plate	DWA00003-5/1
5	NUT	1	MBsBD C3604BD-F	Nickel Plate	DNT00025-5/5
4	INSULATOR	1	TEFLON		DIN01014-N/1
3	FERRULE	1	MBsBD C3604BD-F	Nickel Plate	DFE00230-5/1
2	CONTACT	1	BeCu C17300	Gold Plate	DCT04152-5/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD04654-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2020. 12. 01.	
	Angle	APPROVED BY I.C.KIM	
MATERIAL	—	CHECKED BY	
	—	DRAWN BY S.Y.EUN	
FINISH	—	SCALE	UNIT
	—	3/1	mm



TITLE		SMA50 CABLE JB (F/N) LMR200	
DWG NO.	CN03948-7/1	REVISION 1	
SHEET		1 of 1	