


ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~12GHz
3. VSWR (Max) : 1.2

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM		2021.02.02.

1/4-36 UNS-2A

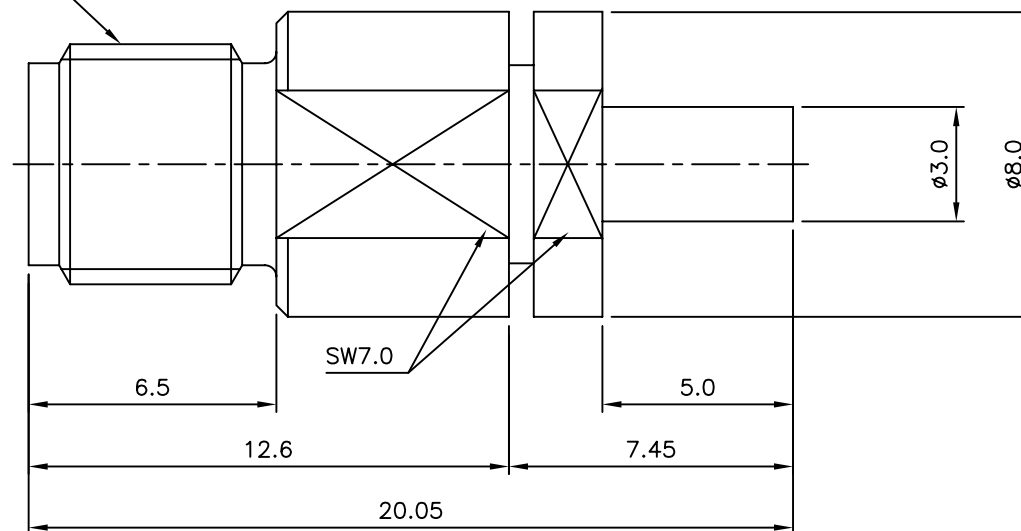

Center conductor

Outer shield

2.3

CABLE 탈피도

5	BACK NUT	1	MBsBD C3604BD-F	Nickel Plate	DBN00221-5/1
4	INSERT	1	MBsBD C3604BD-F	Gold Plate	DIS00326-5/1
3	INSULATOR	1	TEFLON		DIN03188-N/1
2	CONTACT	1	BeCu C17300	Gold Plate	DCT04181-5/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD04686-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2021. 02. 02.			 COMTECH RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY			
	±0.3				
MATERIAL	±1°	CHECKED BY			TITLE SMA50 CABLE JS 47F CLAMP
	-	DRAWN BY	I.C.KIM		
FINISH	-	SCALE	UNIT		A4
		5/1	mm		
					DWG NO. CN03970-7/1
					REVISION I R SHEET 1 of 1