
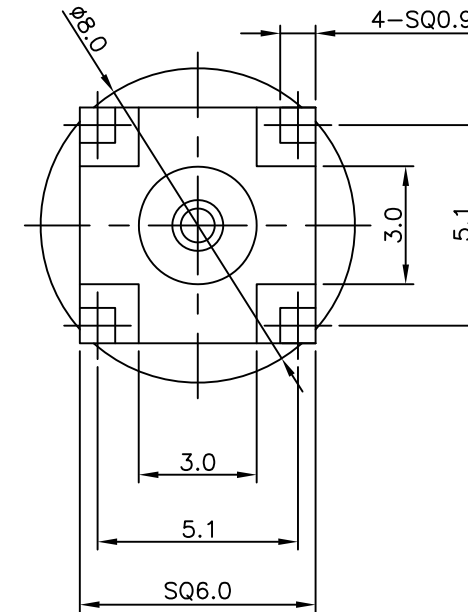


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	S.H.KIM	2022.11.08.

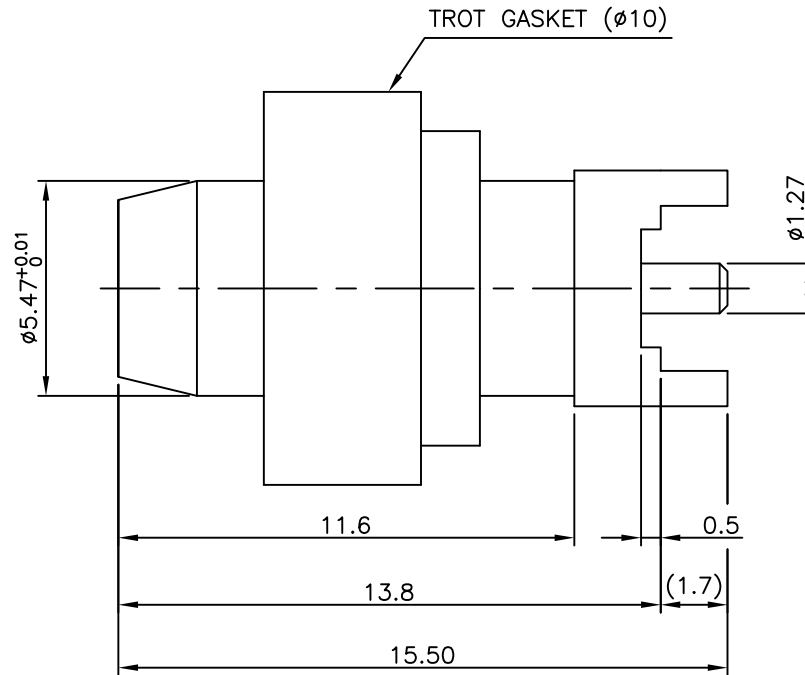


ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~3GHz
3. VSWR (Max) : 1.2
4. DIELECTRIC WITHSTANDING VOLTAGE : 750 V RMS
5. CENTER CONTACT RESISTANCE : $\leq 3.0\text{m}\Omega$
6. OUTER CONTACT RESISTANCE : $\leq 2.5\text{m}\Omega$

ENVIRONMENTAL DATA:

1. TEMPERATURE RANGE : $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$

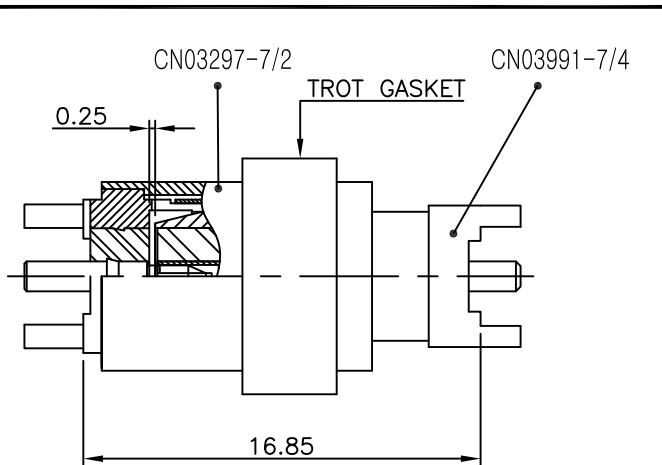

체결도 (SCALE 3:1)

NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE
4	TROT GASKET	1	—	—	DGK00324-N/3
3	INSULATOR	1	TEFLON		DIN02155-N/1
2	CONTACT	1	BeCu C17300	Gold Plate	DCT02619-5/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plate (납땜성향상)	DBD04739-5/4

TOLERANCE	Decimal ± 0.2	DATE 2022. 11. 08.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle $\pm 1^{\circ}$	APPROVED BY	S.H.KIM	
MATERIAL —		CHECKED BY		TITLE PDM50 PCB JS-4R
FINISH —		DRAWN BY	S.Y.EUN	
SCALE 5/1		UNIT mm		A4 DWG NO. CN03991-7/4 REVISION I R SHEET 1 of 1