


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM		2021.07.08.

1/4-36 UNS-2A

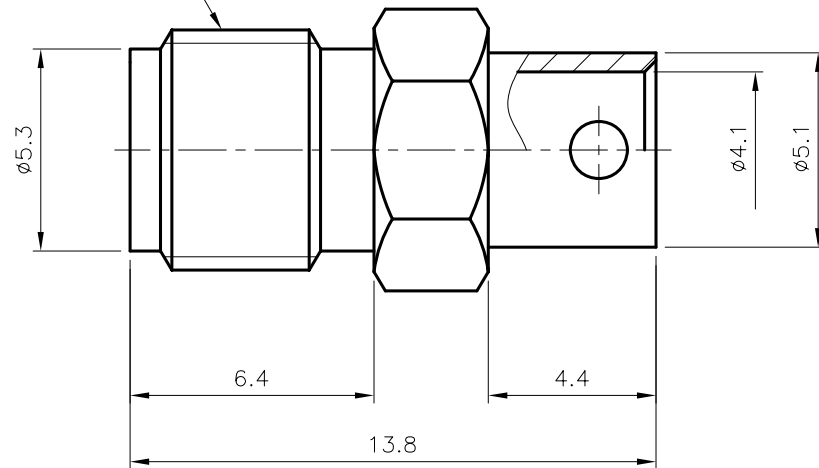


*전기적 특성


1	Frequency range	DC ~ 6GHz
2	Impedance	50ohm Nominal
3	V.S.W.R	1.2 : 1 max @3GHz
4	Insertion Loss	-0.3dB min
5	PIMD-DIN TERM (-43dBm / 2 tone)	CDMA & WCDMA 3차 : -165dBc max

4	FERRULE	1	MBsBD C3604BD-F	Nickel Plate	DFE00162-5/1
3	INSULATOR	1	TEFLON		DIN03234-N/1
2	CONTACT	1	BeCu C17300	Silver Plate (5μm)	DCT04236-5/1
1	BODY	1	MBsBD C3604BD-F	SuCo Plate (3μm)	DBD04761-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2021. 07. 08.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY		
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE 2.92mm CABLE JS MF141
		DRAWN BY	I.C.KIM	
FINISH		SCALE	5/1	DWG NO. CN04008-7/1 REVISION I R SHEET 1 of 1
		UNIT	mm	

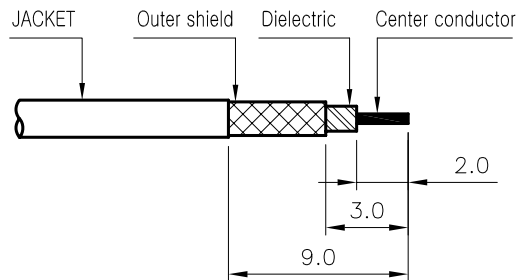

CABLE STRIPPING



CABLE ASS'Y