

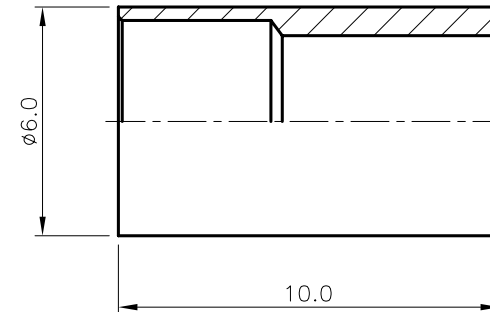


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM		2021. 07. 08.

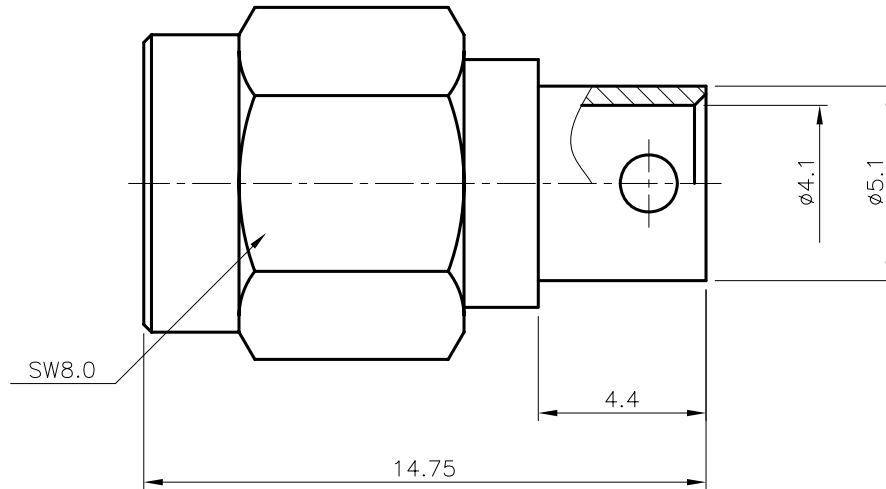


*전기적 특성

1	Frequency range	DC ~ 6GHz
2	Impedance	50ohm Nominal
3	V.S.W.R	1.2 : 1 max @3GHz
4	Insertion Loss	-0.3dB min
5	PIMD-DIN TERM (-43dBm / 2 tone)	CDMA & WCDMA 3차 : -165dBc max

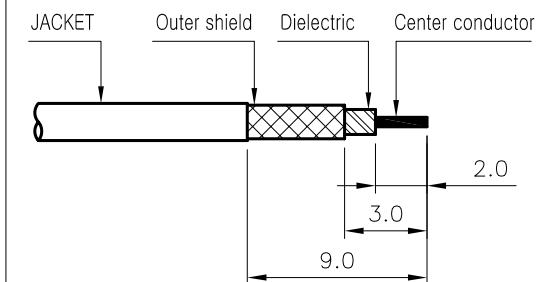

CABLE STRIPPING

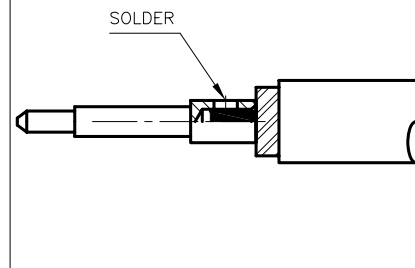

CABLE ASS'Y

7	SPRING RING	1	SUS	부동태 처리	DSR00002-5/1
6	COUPLING CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU00005-5/2
5	INSULATOR	1	TEFLON		DIN03234-N/1
4	GASKET	1	SILICONE RUB		DGK00004-N/1
3	FERRULE	1	MBsBD C3604BD-F	Nickel Plate	DFE00162-5/1
2	CONTACT	1	MBsBD C3604BD-F	Silver Plate (5μm)	DCT04237-5/1
1	BODY	1	MBsBD C3604BD-F	SUCO Plate (3μm)	DBD04762-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2021. 07. 08.	
	Angle	APPROVED BY	
MATERIAL	±0.2	CHECKED BY	
	±1°	DRAWN BY	I. C. KIM
FINISH	-	SCALE	5/1
		UNIT	mm

		RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
KJ COMTECH CO.,LTD.		TITLE 2.92mm CABLE PS MF141(50Ω)	
DWG NO. CN04009-7/1		REVISION I R	
A4		SHEET 1 of 1	