


CN04023-7/2

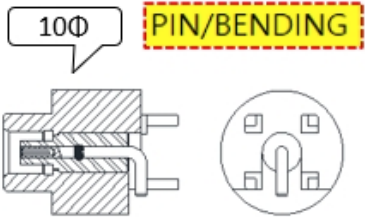

MCX JS-4R ■PIN/SMT
5.1-□0.9-Φ0.95
B:11.7-2.5 (F:3.9mm)
BODY/Nickel PIN/Gold

CN04023-7/2

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

VSWR
~6GHz
~1.2:1

► NETWORK ANALYZER

- ☐ E5071B (~8.5GHz)
- ☒ ZND (~8.5GHz)
- ☐ ZVA50 (~50GHz)


► Test cable

- ☒ N Male to SMA Male
10GHz Cable (CF00540-7/1)
- ☐ N Male to N Male
10GHz Cable (CF00539-7/1)
- ☐ 2.4mm Male to 2.4mm Male
50GHz Cable)

► Test Adaptor



5/19/2022 9:15:01 AM
1328.5170K92-102503-Hn

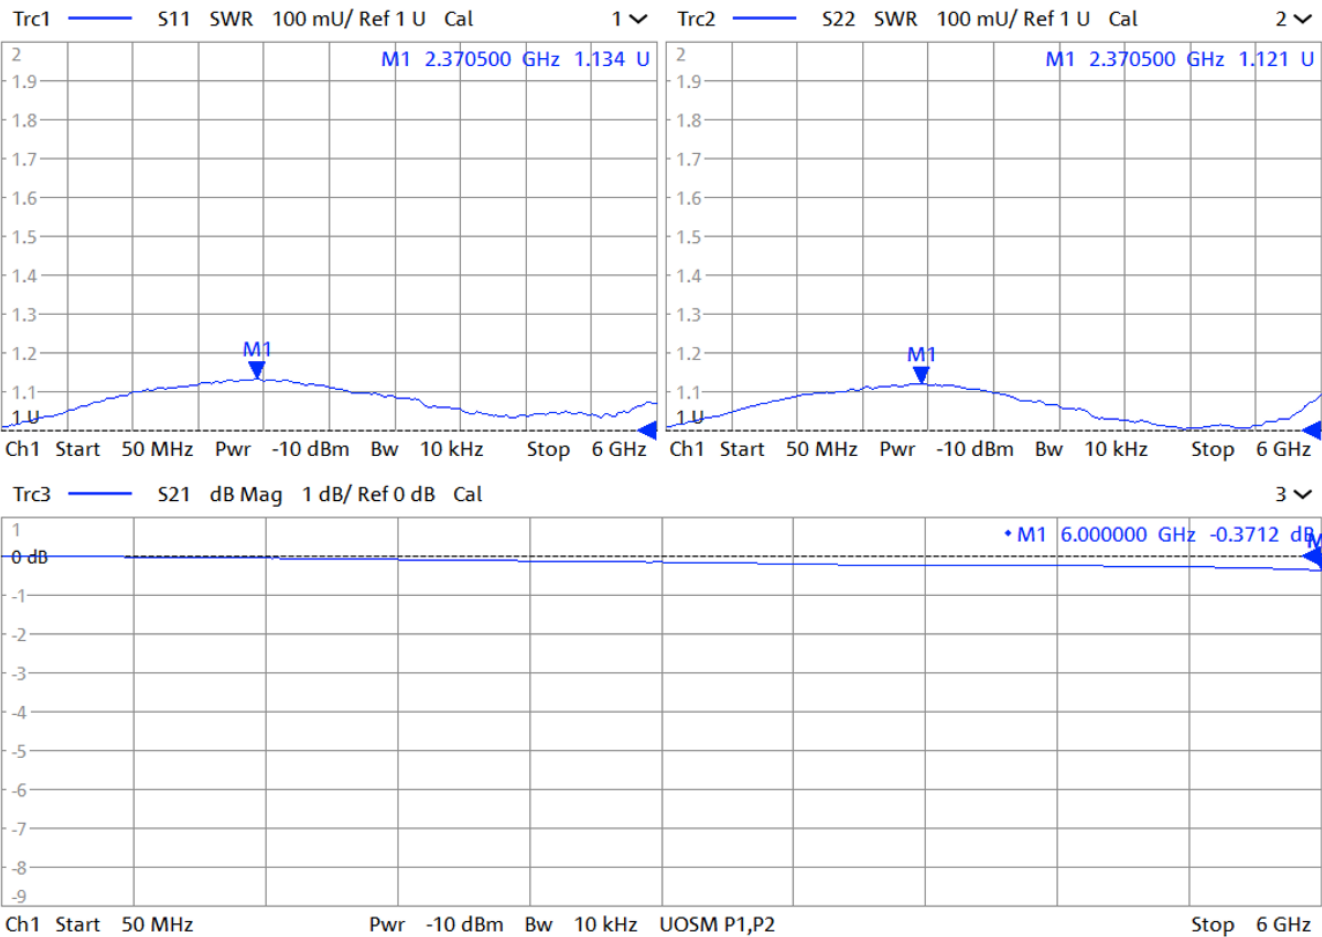

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3: Insertion Loss (S21)