
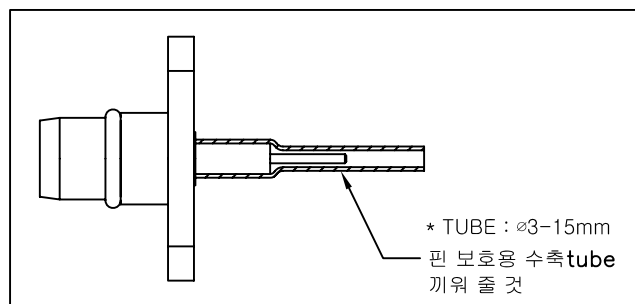
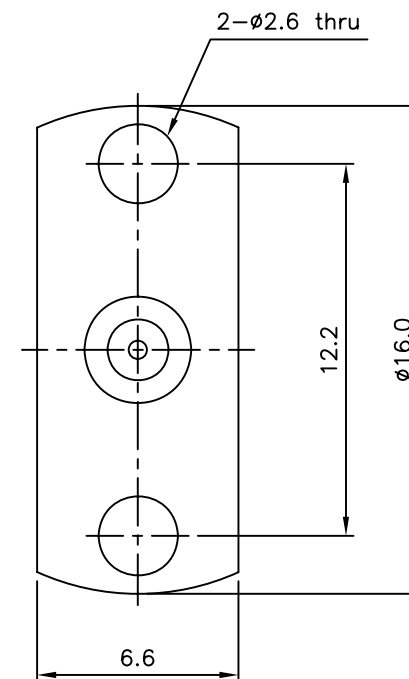


■ ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : 6~14GHz
3. VSWR (Max) : 1.2

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.H.KIM		2022.05.31.

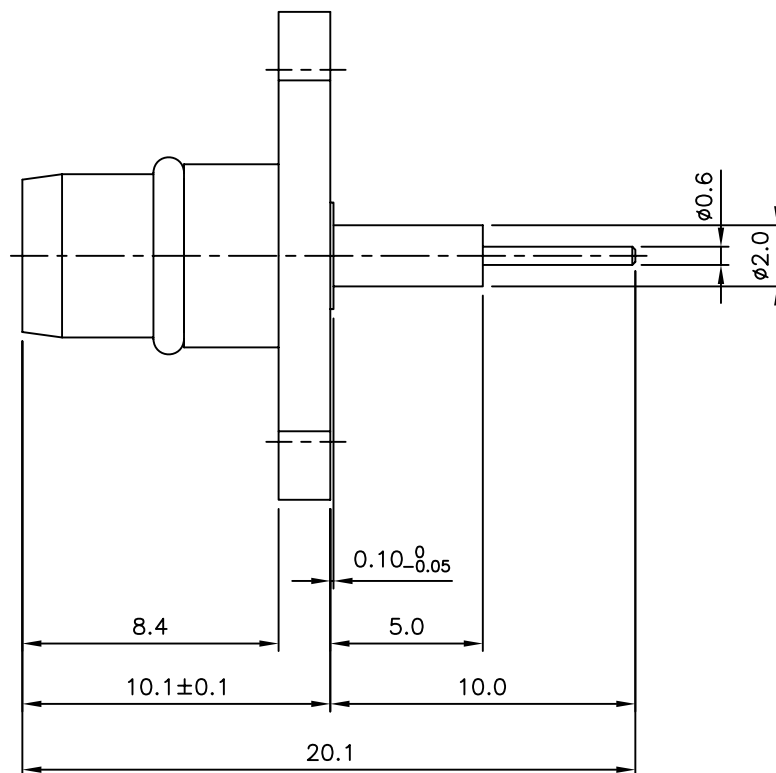

5	SHRINK TBUE	1	—	—	ATU00054-N/1 ($\varnothing 3-15\text{mm}$ Black)
4	GASKET	1	SILICONE RUB	RED	DGK00017-N/2
3	INSULATOR	1	TEFLON		DIN03298-N/1
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate (1.27 μm)	DCT04310-5/1
1	BODY	1	MBsBD C3604BD-F	Gold Plate	DBD04828-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE2022. 05. 31.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017			
	Angle	APPROVED BY						
MATERIAL	±0.2	CHECKED BY			TITLE BMA50 SOLDER END PS-2H			
	±1°	DRAWN BY	S.H.KIM					
FINISH	-	SCALE	UNIT		A4			
	-	4/1	mm			DWG NO. CN04054-7/1		
					REVISION	I R	SHEET	1 of 1

A4