


* ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~12GHz
3. VSWR : 1.2 (Max)

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	S.H.KIM	2022.08.25.
1	에폭시 작업성 개선으로 인한 PIN 납시바를 추가	S.Y.EUN	S.H.KIM	2022.09.05.
2	EPOXY 작업 후 핀 회전 방지로 인한 납시바를 삭제 및 널링 추가	S.Y.EUN	S.H.KIM	2022.11.01.

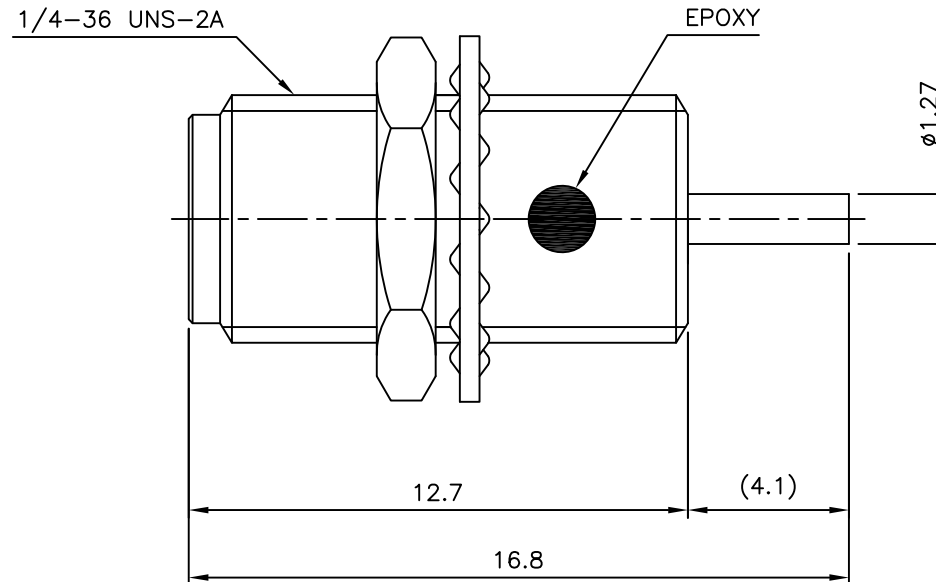

5	WASHER	1	MBsBD C3604BD-F	Nickel Plate	DWA00005-5/3
4	NUT	1	MBsBD C3604BD-F	Nickel Plate	DNT00025-5/5
3	INSULATOR	1	TEFLON		DIN00103-N/2
2	CONTACT	1	BeCu C17300	Gold Plate (1.27μm)	DCT04321-5/1
1	BODY	1	SUS	Passivate	DBD04847-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.1	DATE 2022. 09. 05.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle ±1°	APPROVED BY	S.H.KIM		
MATERIAL		CHECKED BY		TITLE	
FINISH		DRAWN BY	S.Y.EUN	SMA50 SOLDER END JB (F/F)	
SCALE 5/1		UNIT mm		DWG NO. CN04065-7/1	SHEET 1 of 1
				REVISION 2	