


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	S.H.KIM	2022.11.10.

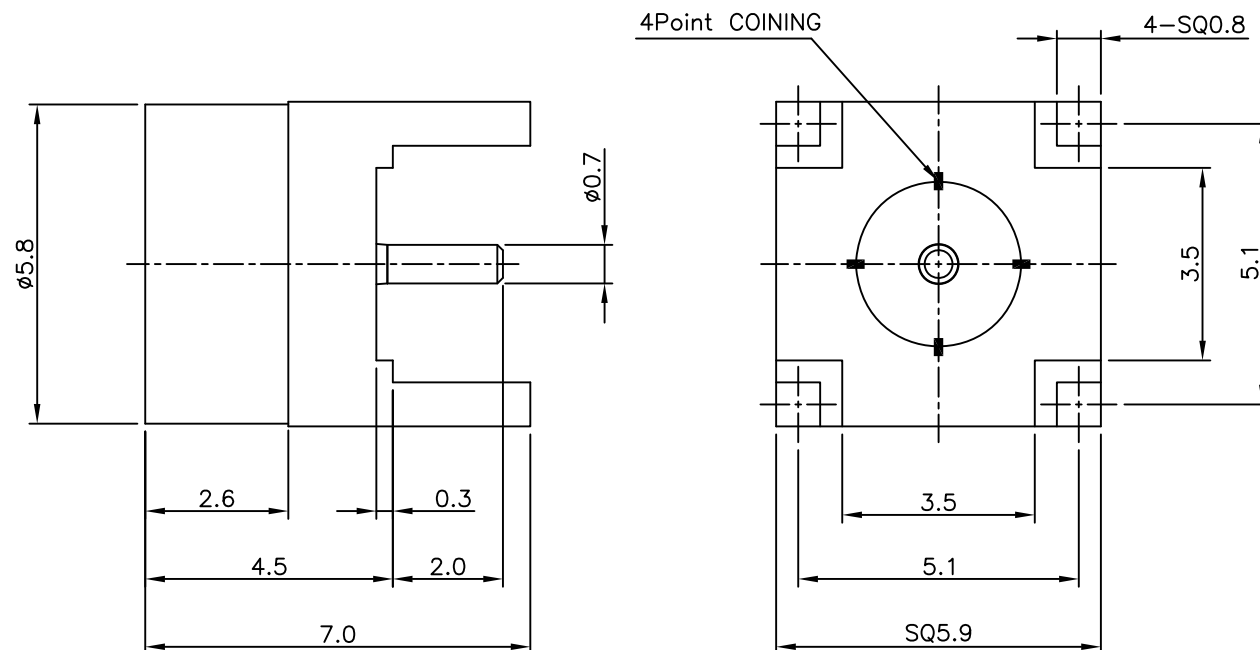


* ELECTRICAL SPECIFICATIONS

1. Frequency Range : DC~6GHz
2. Impedance : 50Ω
3. V.S.W.R (MAX) : 1.1 @ ~2GHz
1.25 @ ~6GHz
4. Dielectric withstanding voltage : 500VRMS. Min.

* PHYSICAL

1. Durability : 100 Cycles Min.
2. Engagement force : Full detent : ≤ 6.93Kgf
3. Disengagement force : Full detent : ≥ 2.24Kgf
4. Temperature range : -65°C to 155°C

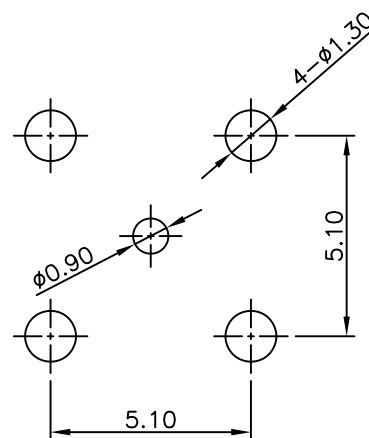

MOUNTING HOLE SIZE

		3	INSULATOR	1	PEEK		DIN03327-N/1
		2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT04344-5/1
		1	BODY	1	MBsBD C3604BD-F	Gold Plate	DBD04871-5/1
		NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE
TOLERANCE	Decimal	DATE			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.		
	±0.2	2022. 11. 10.					
	Angle	APPROVED BY	S.H.KIM				
	±1°	CHECKED BY			TITLE SMP50 PCB PS-4R (FULL DETENT)		
MATERIAL	-	DRAWN BY	S.Y.EUN				
FINISH		SCALE	UNIT		A4	DWG NO.	CN04074-7/1
-		7/1	mm			REVISION	I R