
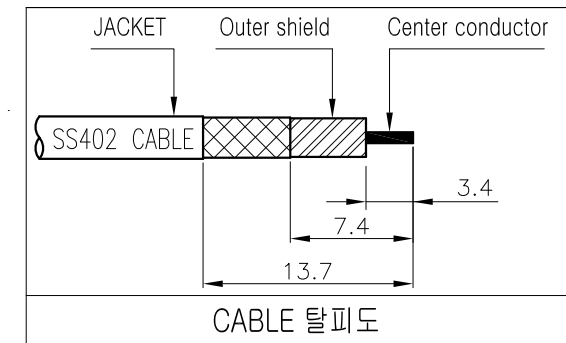



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.H.KIM		2022.10.14.

ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~8GHz
3. VSWR (Max) : 1.2

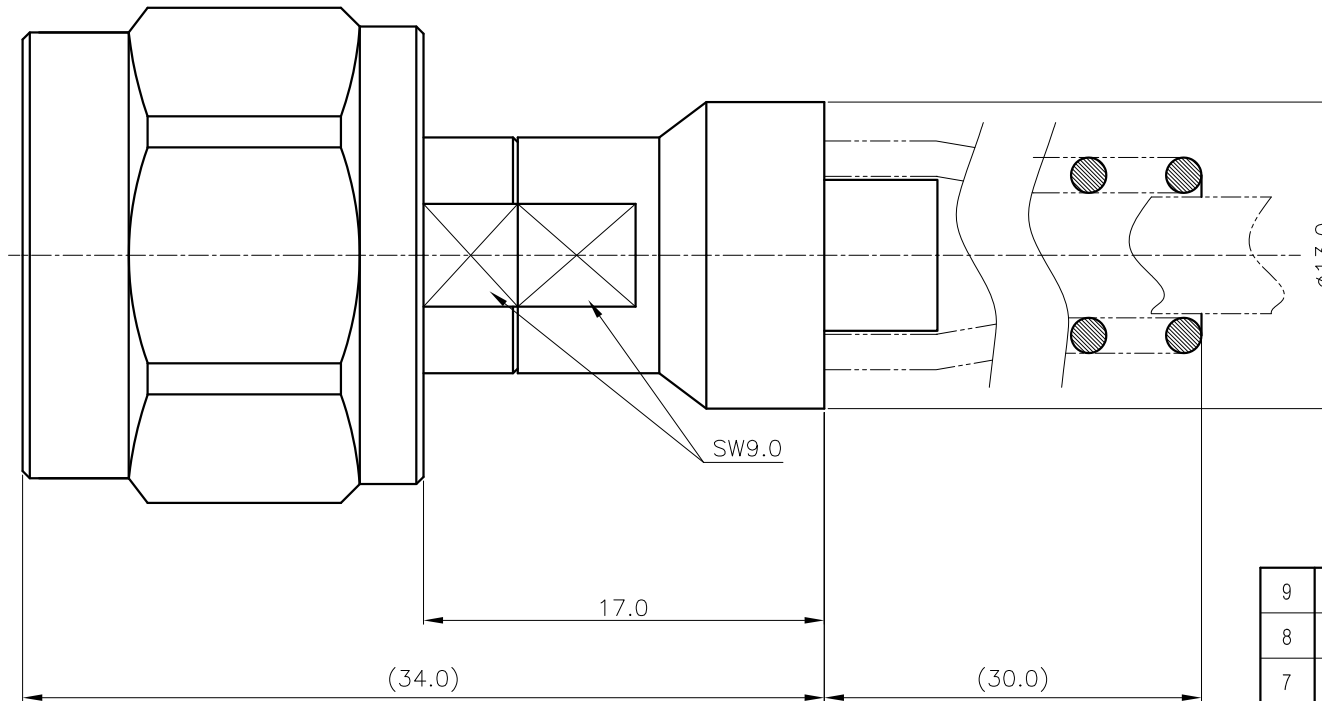

9	SPRING RING	1	SUS304	Black Chrome	DSR01199-5/1
8	SPRING RING	1	PBR	Nickel Plate	DSR00020-5/1
7	BACK NUT	1	MBsBD C3604BD-F	Nickel Plate	DBN00226-5/2
6	COUPLING CAP	1	SUS303	Passivate	DCU00063-5/5
5	INSULATOR	1	TEFLON		DIN03051-N/2
4	FERRULE	1	MBsBD C3604BD-F	Nickel Plate	DFE00059-5/1
3	GASKET	1	SILICONE RUB		DGK00013-N/1
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT04016-5/3
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD04861-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.3	DATE 2022. 10. 14.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle ±1°	APPROVED BY				
MATERIAL _____		CHECKED BY			TITLE N50 CABLE PS RG400	
		DRAWN BY S.H.KIM				
FINISH _____		SCALE 3/1	UNIT mm		A4	
						DWG NO. CN04080-7/1
					REVISION I R	SHEET 1 of 1