
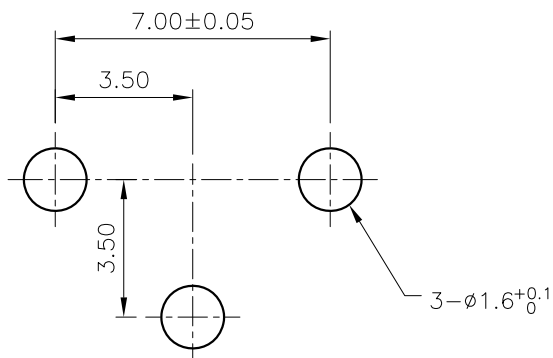
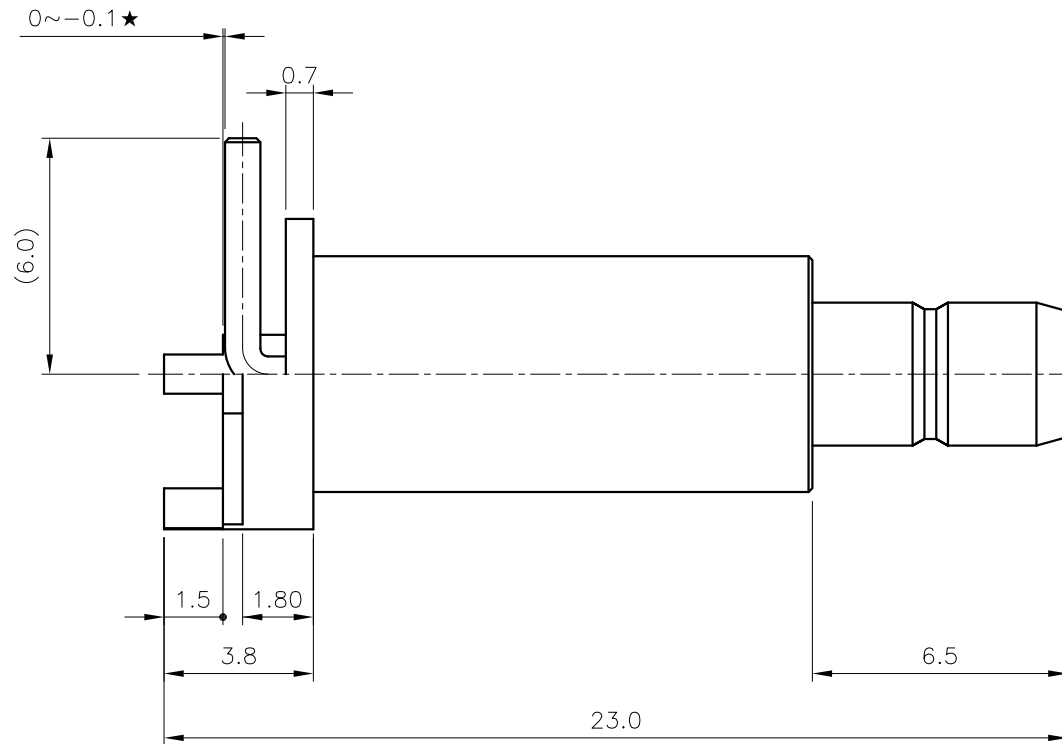



* 상대물 CN03594-7/1 완제품으로
 삽.이탈력 체크 할 것. (최저치 로 관리)
 삽입력 : 2~4Kgf
 이탈력 : 5~8Kgf

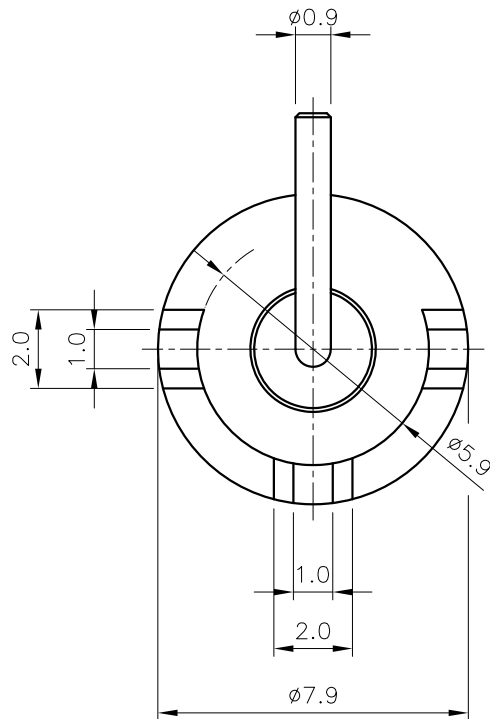

PCB MOUNTING HOLE

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.H.KIM		2023.04.14.

4	INSULATOR	1	TEFLON		DIN03350-N/1
3	INSULATOR	1	TEFLON		DIN03362-N/1
2	CONTACT	1	MBsBD C3604BD-F	Gold 0.4μm Plate	DCT04373-5/1
1	BODY	1	MBsBD C3604BD-F	Gold Plate (하지 Nickel 5μm이상)	DBD04899-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.2	DATE 2023. 04. 14.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.		
	Angle ±1°	APPROVED BY					
MATERIAL _____		CHECKED BY			TITLE SMB50 PCB JS-4R JK노말		
FINISH _____		DRAWN BY S.H.KIM					
SCALE 5/1		UNIT mm			A4	DWG NO. CN04109-7/1	
						REVISION I R	