


■포장사양

1.OUT BOX 코드 및 수량 : DBX00034-N/1 2,500EA

2.P-T100(1)P2-B

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.H.KIM		2024.06.11.

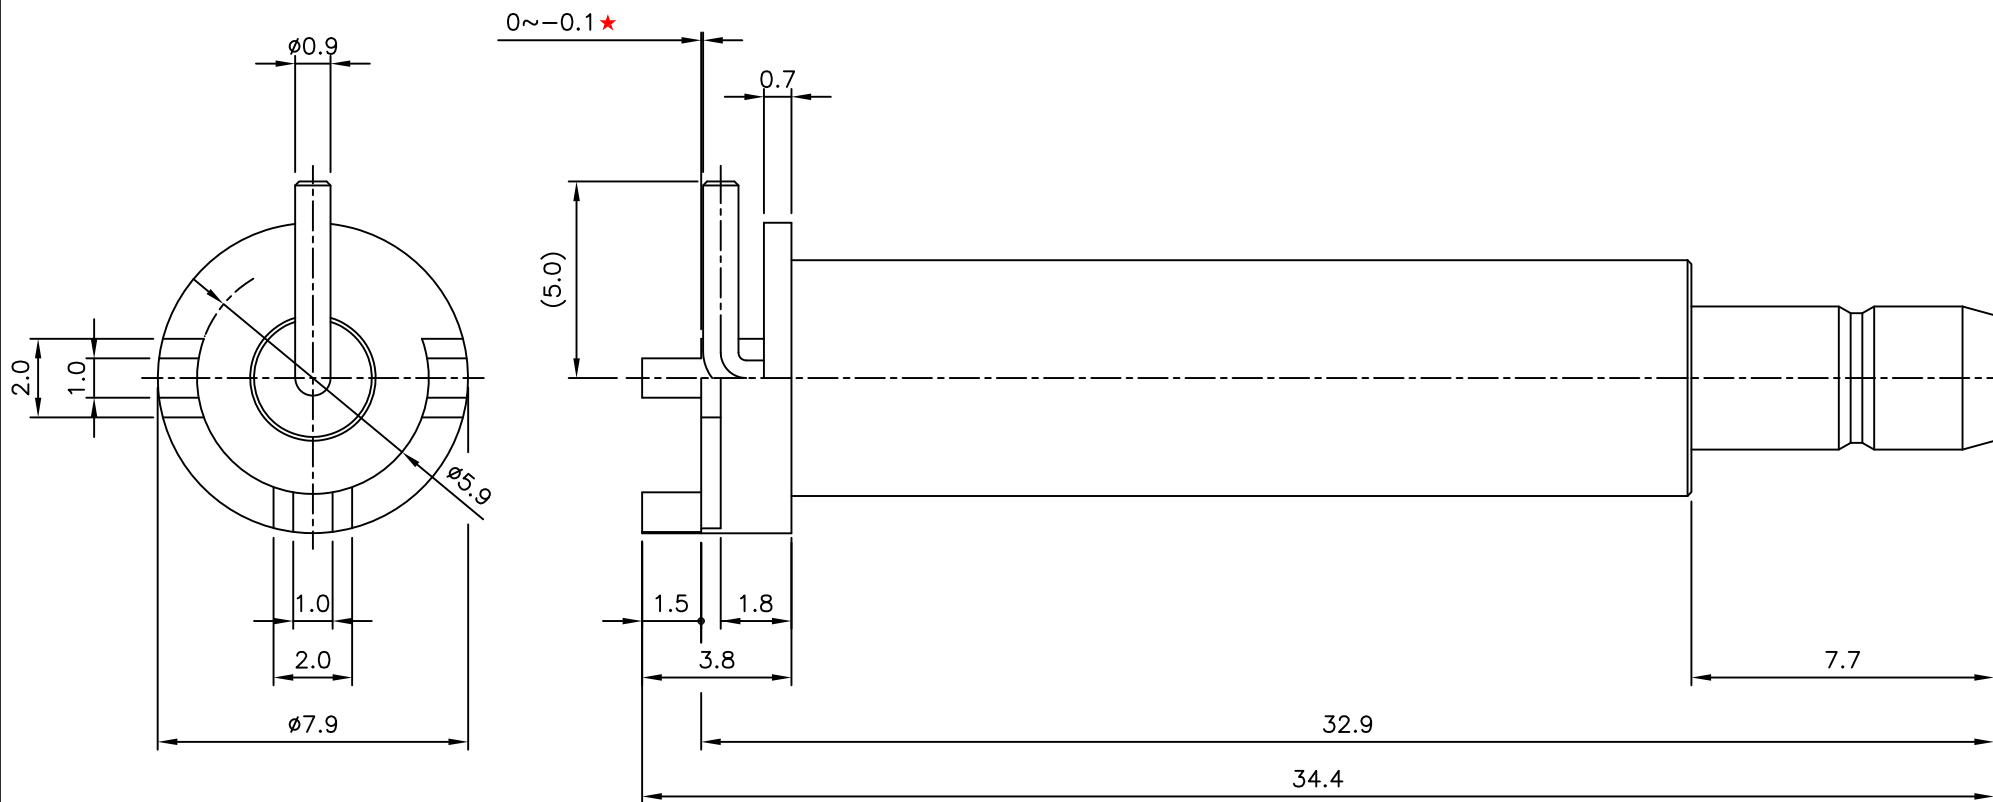

4	INSULATOR	1	TEFLON		DIN03399-N/1
3	INSULATOR	1	TEFLON		DIN03362-N/1
2	CONTACT	1	MBsBD C3604BD-F	Gold 0.4 μ m Plate	DCT04437-5/1
1	BODY	1	MBsBD C3604BD-F	Gold Plate (하지 Nickel 5 μ m이상)	DBD04948-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.2	DATE 2024. 06. 11.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY			
MATERIAL _____	CHECKED BY			TITLE SMB50 PCB JS-4R JK 파노라미	
	DRAWN BY S.H.KIM				
FINISH _____	SCALE 5/1	UNIT mm		A4	DWG NO. CN04139-7/1
					REVISION I R

* 상대물 CN03594-7/1 완제품으로
삽.이탈력 체크 할 것. (최저치 로 관리)
삽입력 : 2~4Kgf
이탈력 : 5~8Kgf

PCB MOUNTING HOLE