
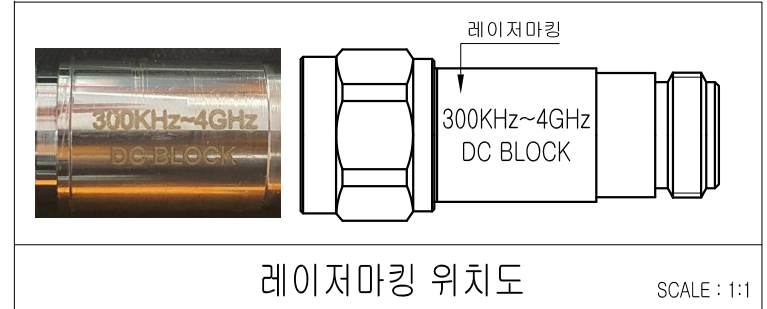


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration		Y.H.CHOI	2010.02.17.
1	[설변처리No.201201-0008] 특성개선 PCB 뒷면 수정	I.C.KIM	J.H.YOUN	2012.01.18.
2	DB00001-7/2 -> DB00001-7/1 제품 코드 크로스 전환 및 레이저마킹 적용	S.Y.EUN	S.H.KIM	2022.02.17.

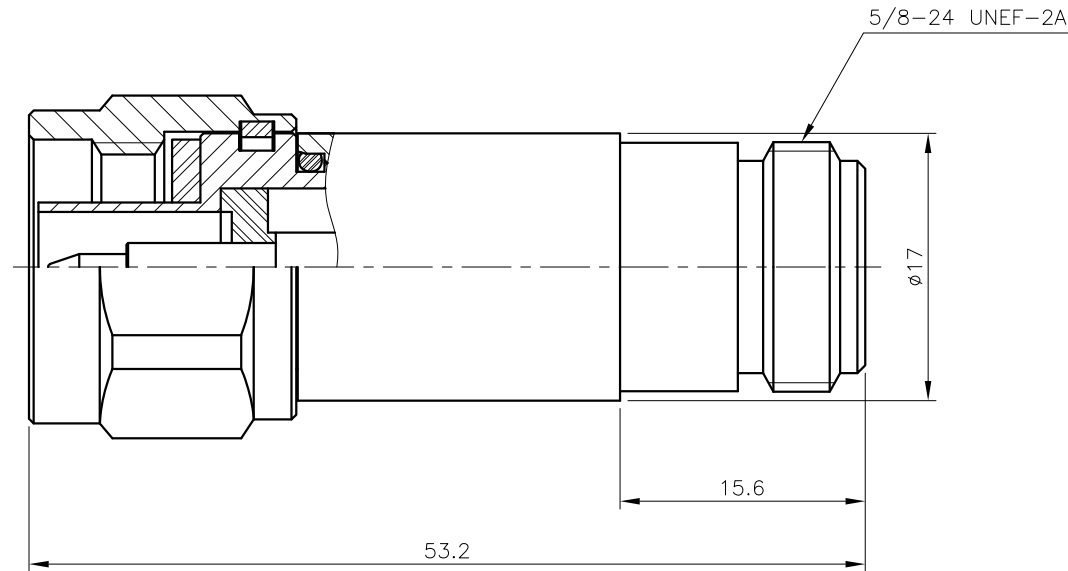

☒	☐	☐
inner	outer	inner/outer

ELECTRICAL SPECIFICATIONS		
1	IMPEDANCE	50Ω NOMINAL
2	FREQUENCY RANGE	300KHz ~ 4GHz
3	V.S.W.R	1.25 : 1 (Max)
4	Insertion Loss	1.0dB (Max)
5	Voltage Rating	100 V

2	12	LABEL	1	은색라벨지		DLA00266-8/1
	11	CAPACITOR	1	3225칩 1μF		DCP00170-N/1
1	10	PCB	1	FR4		DPC00416-9/2 DPC00416-9/1
	9	O-RING	1	SILICONE RUB		DGK00121-N/1
	8	GASKET	1	SILICONE RUB		DGK00013-N/1
	7	SPRING RING	1	MBsBD	Nickel Plate	DSR00020-5/1
	6	CAP	1	MBsBD	Nickel Plate	DCU00063-5/3
	5	INSULATOR	2	TEFLON		DIN00699-N/1
	4	CONTACT(B)	1	BeCu	Gold Plate	DCT01745-5/1
	3	CONTACT(A)	1	MBsBD	Gold Plate	DCT01744-5/1
	2	BODY(B)	1	MBsBD	Nickel Plate	DBD02311-5/2
	1	BODY(A)	1	MBsBD	Nickel Plate	DBD02220-5/2
	NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.1	DATE 2022. 02. 17.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle ±1°	APPROVED BY	S.H.KIM		
MATERIAL		CHECKED BY		TITLE N50-A-JP DC/BLOCK(방수)	
FINISH		DRAWN BY	S.Y.EUN	DWG NO. DB00001-7/1	
		SCALE 2/1	UNIT mm	A4	REVISION 2
				SHEET 1 of 1	