
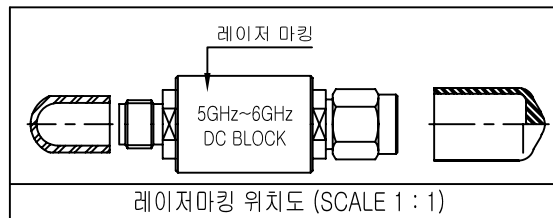


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1R	Initial Registration	I.C.KIM		2019.08.11.
1	공정성 개선 HOLE 삭제	I.C.KIM		2019.10.14.
2	라벨 부착 -> 레이저 마킹 변경	S.Y.EUN	S.H.KIM	2022.02.18.

1/4-36 UNS-2A

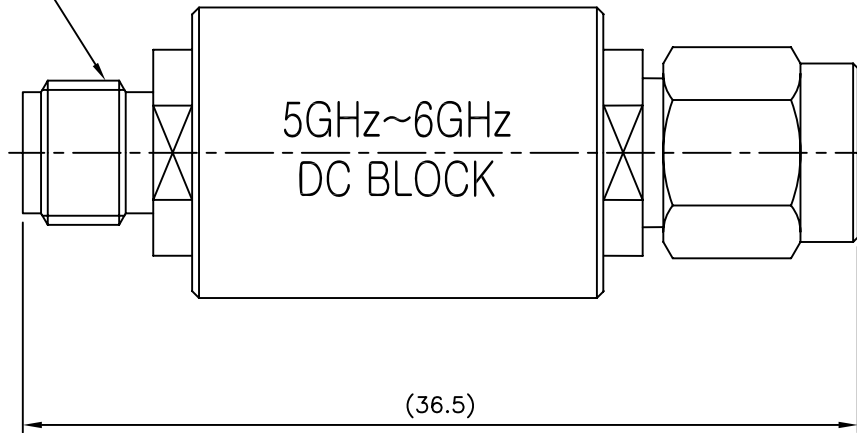

* ELECTRICAL SPECIFICATIONS

1. Frequency Range : 5GHz ~ 6GHz
2. Impedance : 50Ω
3. V.S.W.R (Max.) : 1.35 : 1
4. Insertion Loss (Max.) : 0.6dB
5. Voltage Rating : 500V
6. 1W, IP67

☐	☒	☐
inner	outer	inner/outer

2	15	LABEL	1	을루테크		DI A00781-8/1
	14	DUST CAP	1	PVC (White)		DGK00313-N/1
	13	DUST CAP	1	PVC (Red)		DGK00069-N/1
	12	SPRING RING	1	SUS	Passivated	DSR00002-5/1
	11	CAP	1	SUS	Passivated	DCU00006-5/1
1	10	COVER	1	PEEK		DCS00060-1/1
	9	INSERT	2	MBsBD C3604BD-F	Gold Plate	DIS00304-5/2
	8	PCB	1	0.5T 1/20Z		DPC01091-9/3
	7	INSULATOR	1	TEFLON		DIN03074-N/1
	6	INSULATOR	1	TEFLON		DIN03073-N/1
	5	GASKET	2	SILICONE RUB		DGK00269-N/2
	4	GASKET	1	SILICONE RUB		DGK00004-N/1
	3	CONTACT	1	BeCu C17300	Gold Plate	DCT04045-5/1
	2	BODY(B)	1	MBsBD C3604BD-F	Nickel Plate	DBD04530-5/1
	1	BODY(A)	1	MBsBD C3604BD-F	Nickel Plate	DBD04529-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE	

TOLERANCE	Decimal	DATE 2022. 02. 18.	
	Angle	APPROVED BY	S.H.KIM
MATERIAL		CHECKED BY	
		DRAWN BY	S.Y.EUN
FINISH		SCALE	3/1
		UNIT	mm

		RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
KJ COMTECH CO.,LTD.		TITLE SMA50-A-JP Outer DC Block (500V)	
DWG NO. DB00013-7/2		SHEET 1 of 1	
REVISION 2		A4	