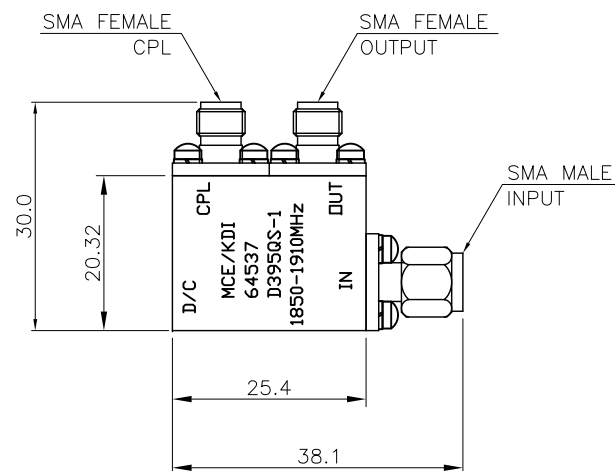





REVISION				
REV	DESCRIPTION			DATE
X1	PROTOTYPE RELEASE	DHU	TPB	2003.07.15
X2	UPDATED DWG AND ADDED DATE CODE		TPB	2003.08.21
X3	FREQ. WAS 1930~1990MHz.	DNC	TPB	2003.09.03
A	PRODUCTION RELEASE, NO CHANGES			2003.10.29
B	ECN 20986.	DNC		2004.01.08

* ELECTRICAL SPECIFICATIONS
 FREQUENCY RANGE : 1850 ~ 1910MHz
 COUPLING VALUE : 10dB $\pm$ 0.75dB
 COUPLING FLATNESS : $\pm$ 0.15dB
 INSERTION LOSS : 0.66dB
 DIRECTIVITY : 20dB MIN
 V.S.W.R : 1.25 : 1 MAX.
 POWER HANDING(MAX.) : 1.0W
 IMPEDANCE : 50 Ω

TOLERANCE	Decimal	DATE 2005. 04. 21.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017						
	±0.3	APPROVED BY	J.H.YOUN								
	Angle										
MATERIAL	±1°	CHECKED BY									
	A6061 T6	DRAWN BY				K.I.CHO					
	FINISH	White Chromate	SCALE	1/1	UNIT	mm		TITLE	10dB Directional Coupler		
							A4				
								REVISION	REV.B	SHEET	1 of 1