

1



2

3

4

REVISION

REV	DESCRIPTION	DATE
△		
△		

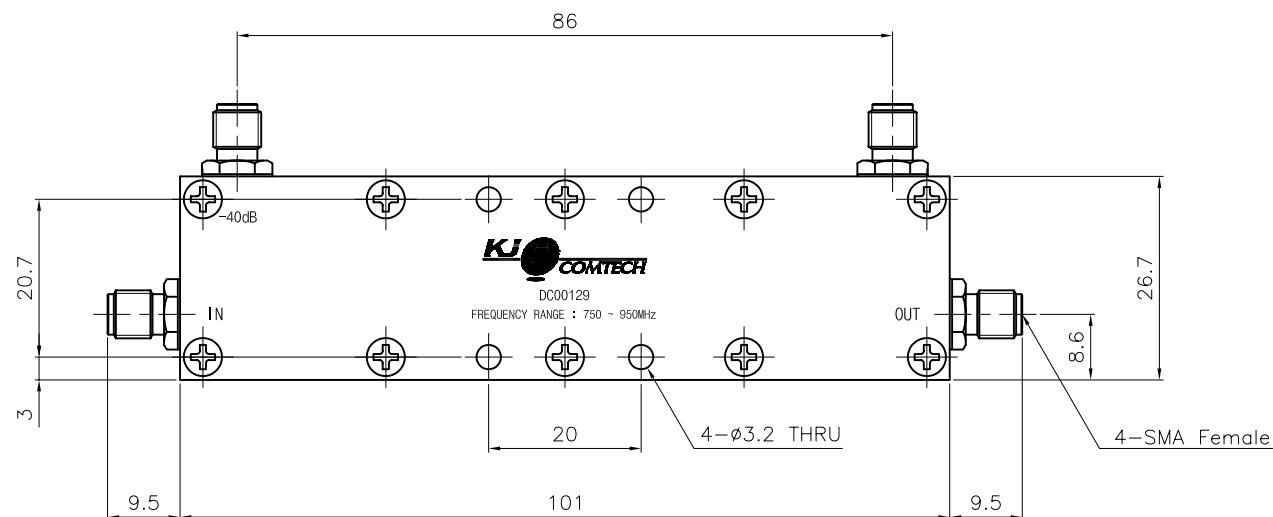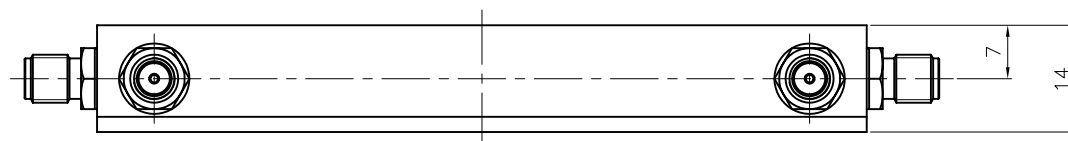

* ELECTRICAL SPECIFICATIONS

Frequency Range : 750.0 ~ 950.0MHz

Coupling Value : 40dB±0.5dB

Insertion Loss (Max.) : 0.2dB

V.S.W.R (Max.) : 1.2 : 1

Directivity (Min.) : 20.0dB

Power Handling (Max.) : 100.0W

Impedance : 50Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (Yellow Chromate)

CONNECTORS : MBsBD (Nickel Plate)

CONNECTORS PINS : Beryllium Copper (Gold Plate)

INSULATORS : TEFLON

REVISION		I	R	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS	
TOLERANCE	Decimal	± 0.3		DATE		2002. 9. 16.	TITLE	 KJ COMTECH CO.,LTD.	RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	Angle	± 1°		APPROVED BY							
			CHECKED BY								
MATERIAL		A6061 T6		DRAWN BY			40dB Directional Coupler				
FINISH		Yellow Chromate		SCALE	1/1	UNIT	mm	A4	DWG NO.	DC00129-7/1	
									SHEET	1	OF