


REVISION		
REV	DESCRIPTION	DATE
IR	최초 개정	2006.08.08.
A	전기적 특성 변경 37dB->40dB, 1.7~2.2GHz->2.1~2.2GHz	2006.09.01.

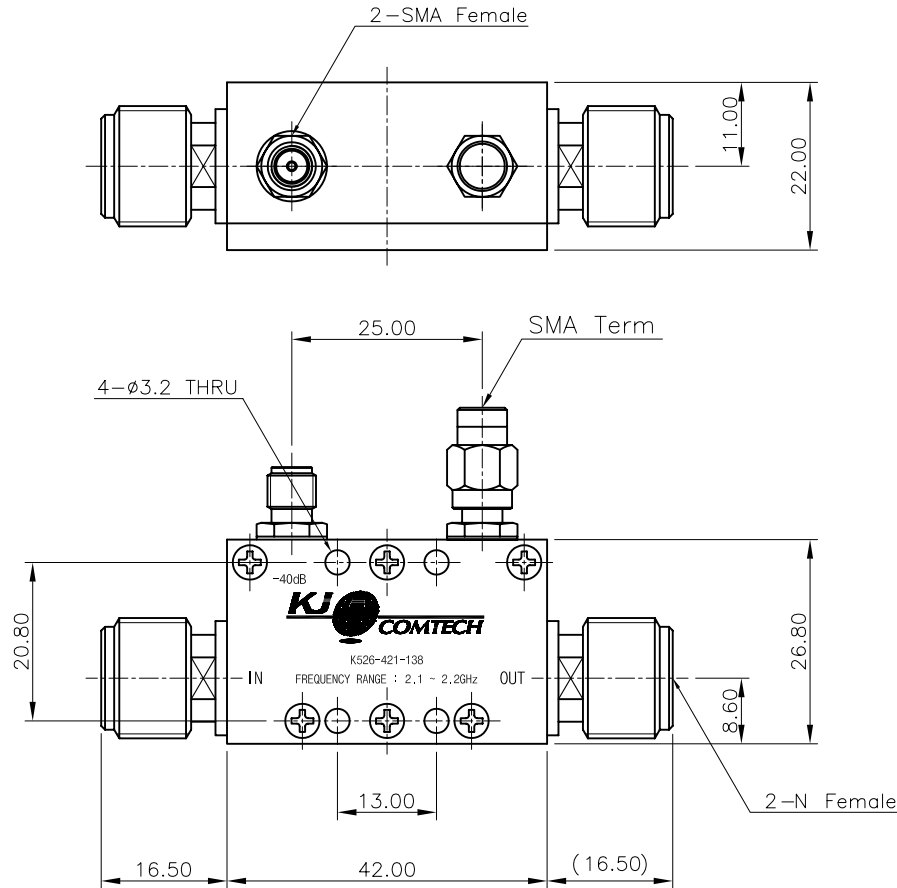

- 1 * ELECTRICAL SPECIFICATIONS
- Frequency Range : 2100.0 ~ 2200.0MHz
 - Coupling Value : 40dB±0.8dB
 - Insertion Loss (Max.) : 0.2dB
 - V.S.W.R (Max.) : 1.22 : 1
 - Directivity (Min.) : 20.0dB
 - Impedance : 50Ω

- * MECHANICAL SPECIFICATIONS
- HOUSING : A6061 T6 (Yellow Chromate)
 - CONNECTORS : MBsBD (Nickel Plate)
 - CONNECTORS PINS : Beryllium Copper (Gold Plate)
 - INSULATORS : TEFLON

TOLERANCE	Decimal	DATE			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017				
	±0.3	2006. 09. 01.							
	Angle	APPROVED BY	S.W.LEE						
MATERIAL	±1°	CHECKED BY	J.H.YOUN			TITLE	40dB Directional Coupler		
	A6061 T6	DRAWN BY	K.I.CHO						
	FINISH	SCALE	UNIT						
Yellow Chromate	1/1	mm			REVISION	REV.A	SHEET	1 of 1	