


REVISION		
REV	DESCRIPTION	DATE
I R	최초 개정	2008.10.28.

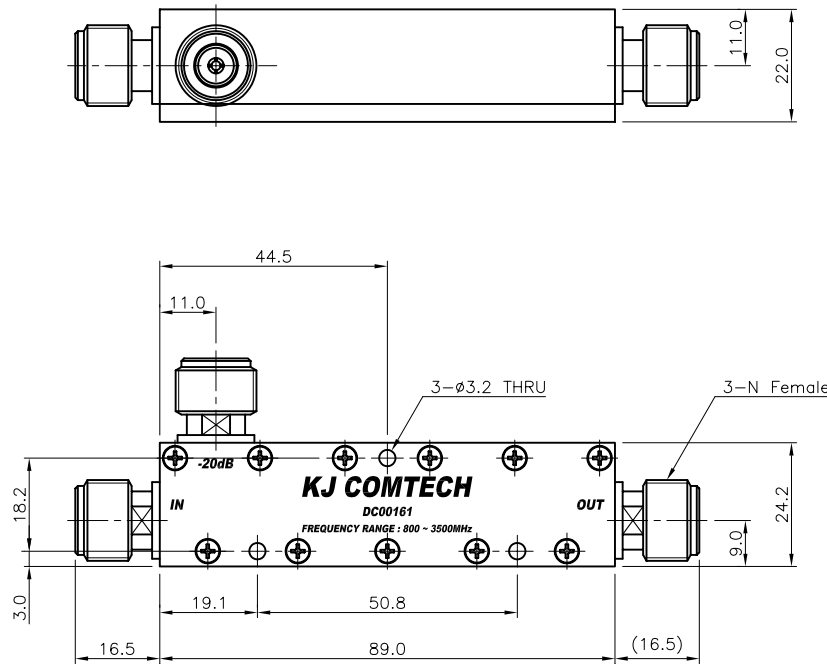

* ELECTRICAL SPECIFICATIONS
Frequency Range : 800.0 ~ 3500.0MHz
Coupling Value : 20dB $\pm$ 1.0dB
Insertion Loss (Max.) : 0.4dB
V.S.W.R (Max.) : IN, OUT PORT - 1.2 : 1,
COUPLING PORT - 1.3 : 1
Directivity (Min.) : 18.0dB
Power Handling (Max.) : 10.0W
Impedance : 50 Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

주 기
1. SILK COLOR : WHITE

TOLERANCE	Decimal ± 0.3	DATE 2008. 10. 28.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle $\pm 1^\circ$	APPROVED BY S.W.LEE	
MATERIAL A6061 T6		CHECKED BY J.H.YOUN	TITLE 20dB Directional Coupler
		DRAWN BY K.I.CHO	
FINISH DIC-183 (Texture)	SCALE 1/1	UNIT mm	 A3 DWG NO. DC00161-8/1 REVISION I R SHEET 1 of 1