


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2013.05.28.

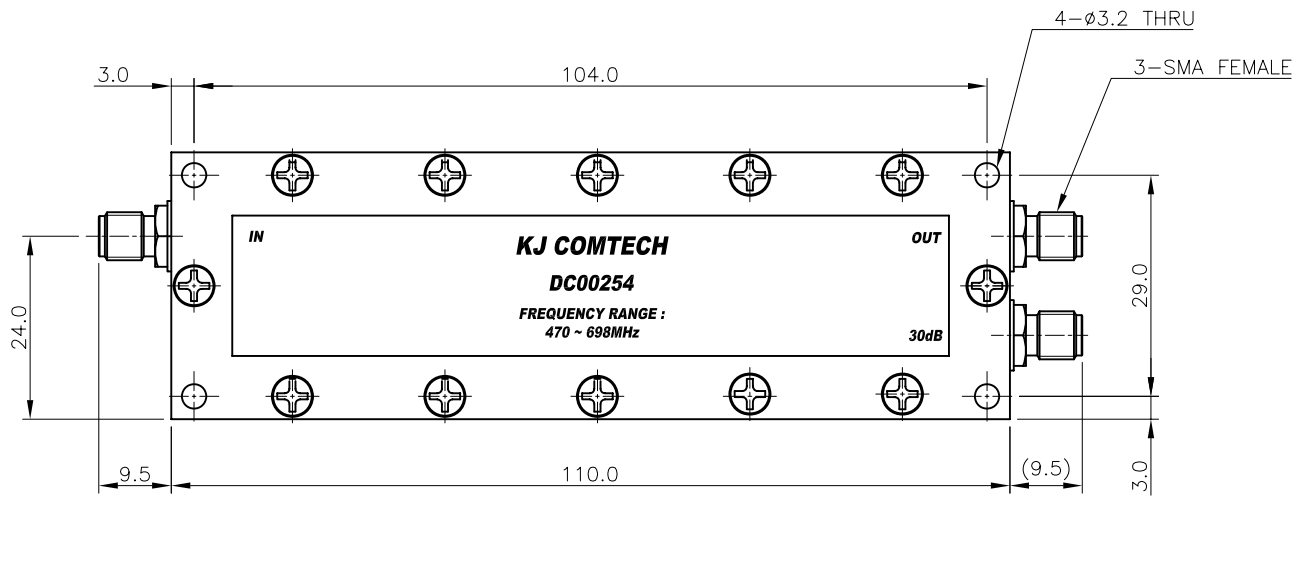

* ELECTRICAL SPECIFICATIONS
 Frequency Range : 470.0 ~ 698.0MHz
 Coupling Value : 30±0.5dB
 Insertion Loss (Max.) : 0.5dB
 V.S.W.R (Max.) : 1.3 : 1
 Directivity (Min.) : 20.0dB
 Power Handling (Max.) : 1.0W
 Impedance : 50.0Ω

* MECHANICAL SPECIFICATIONS
 HOUSING : A6061 T6 (White Chromate)
 CONNECTORS : MBsBD (Nickel Plate)
 CONNECTORS PINS : Beryllium Copper (Gold Plate)
 INSULATORS : TEFLON

TOLERANCE	Decimal	DATE 2013. 05. 28.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN	
MATERIAL	A6061 T6	CHECKED BY	J.H.YOUN	TITLE 30dB Directional Coupler
		DRAWN BY	S.L.SON	
FINISH	White Chromate	SCALE	1/1	DWG NO. DC00254-7/1 REVISION 1 SHEET 1 of 1
		UNIT	mm	

A4