


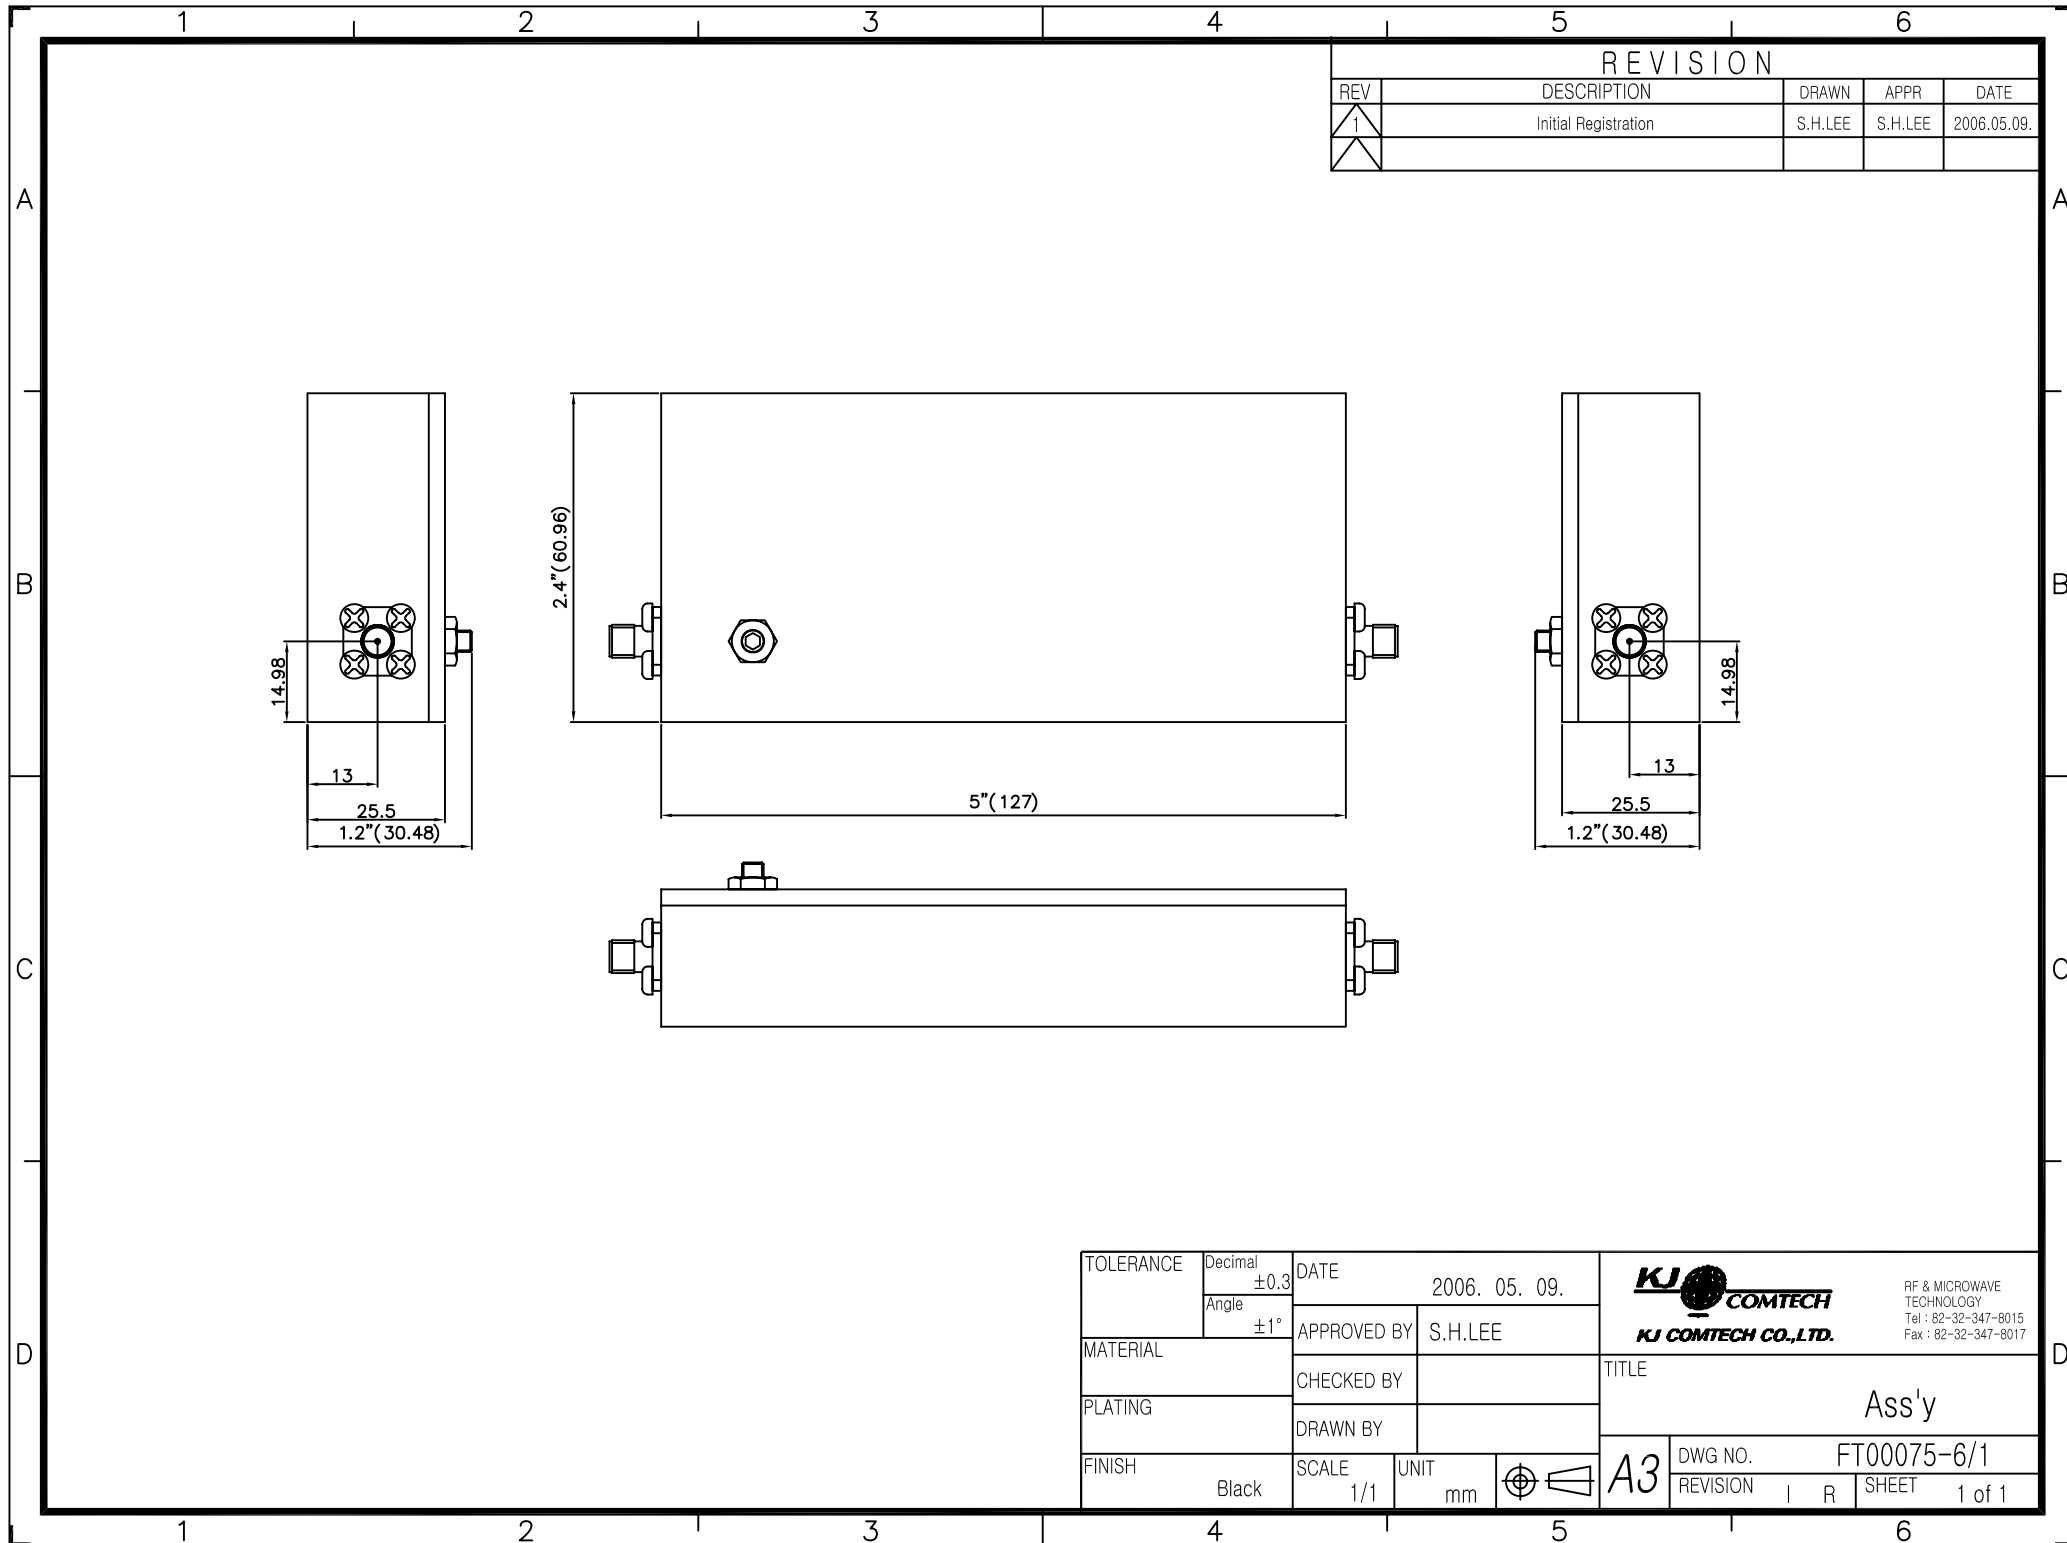

1. Electrical & Mechanical Specification

Electrical Specifications	
Connector	SMA Type (F)
Frequency Range	2197.5~2297.5MHz (BW: 100MHz)
Insertion Loss	≤0.9dB
Return Loss	≥18dB
Rejection (2320~4000MHz)	≥60dB
Power Handling	10W
Impedance	50Ω
Mechanical Specifications	
Dimensions (mm)	127.0 x 60.96 x 30.48
Weight	≤0.5Kg
Operating Temperature	0°C ~ +50.0°C
Connector Finish	Tri-plate
Housing Finish	Black Coating