


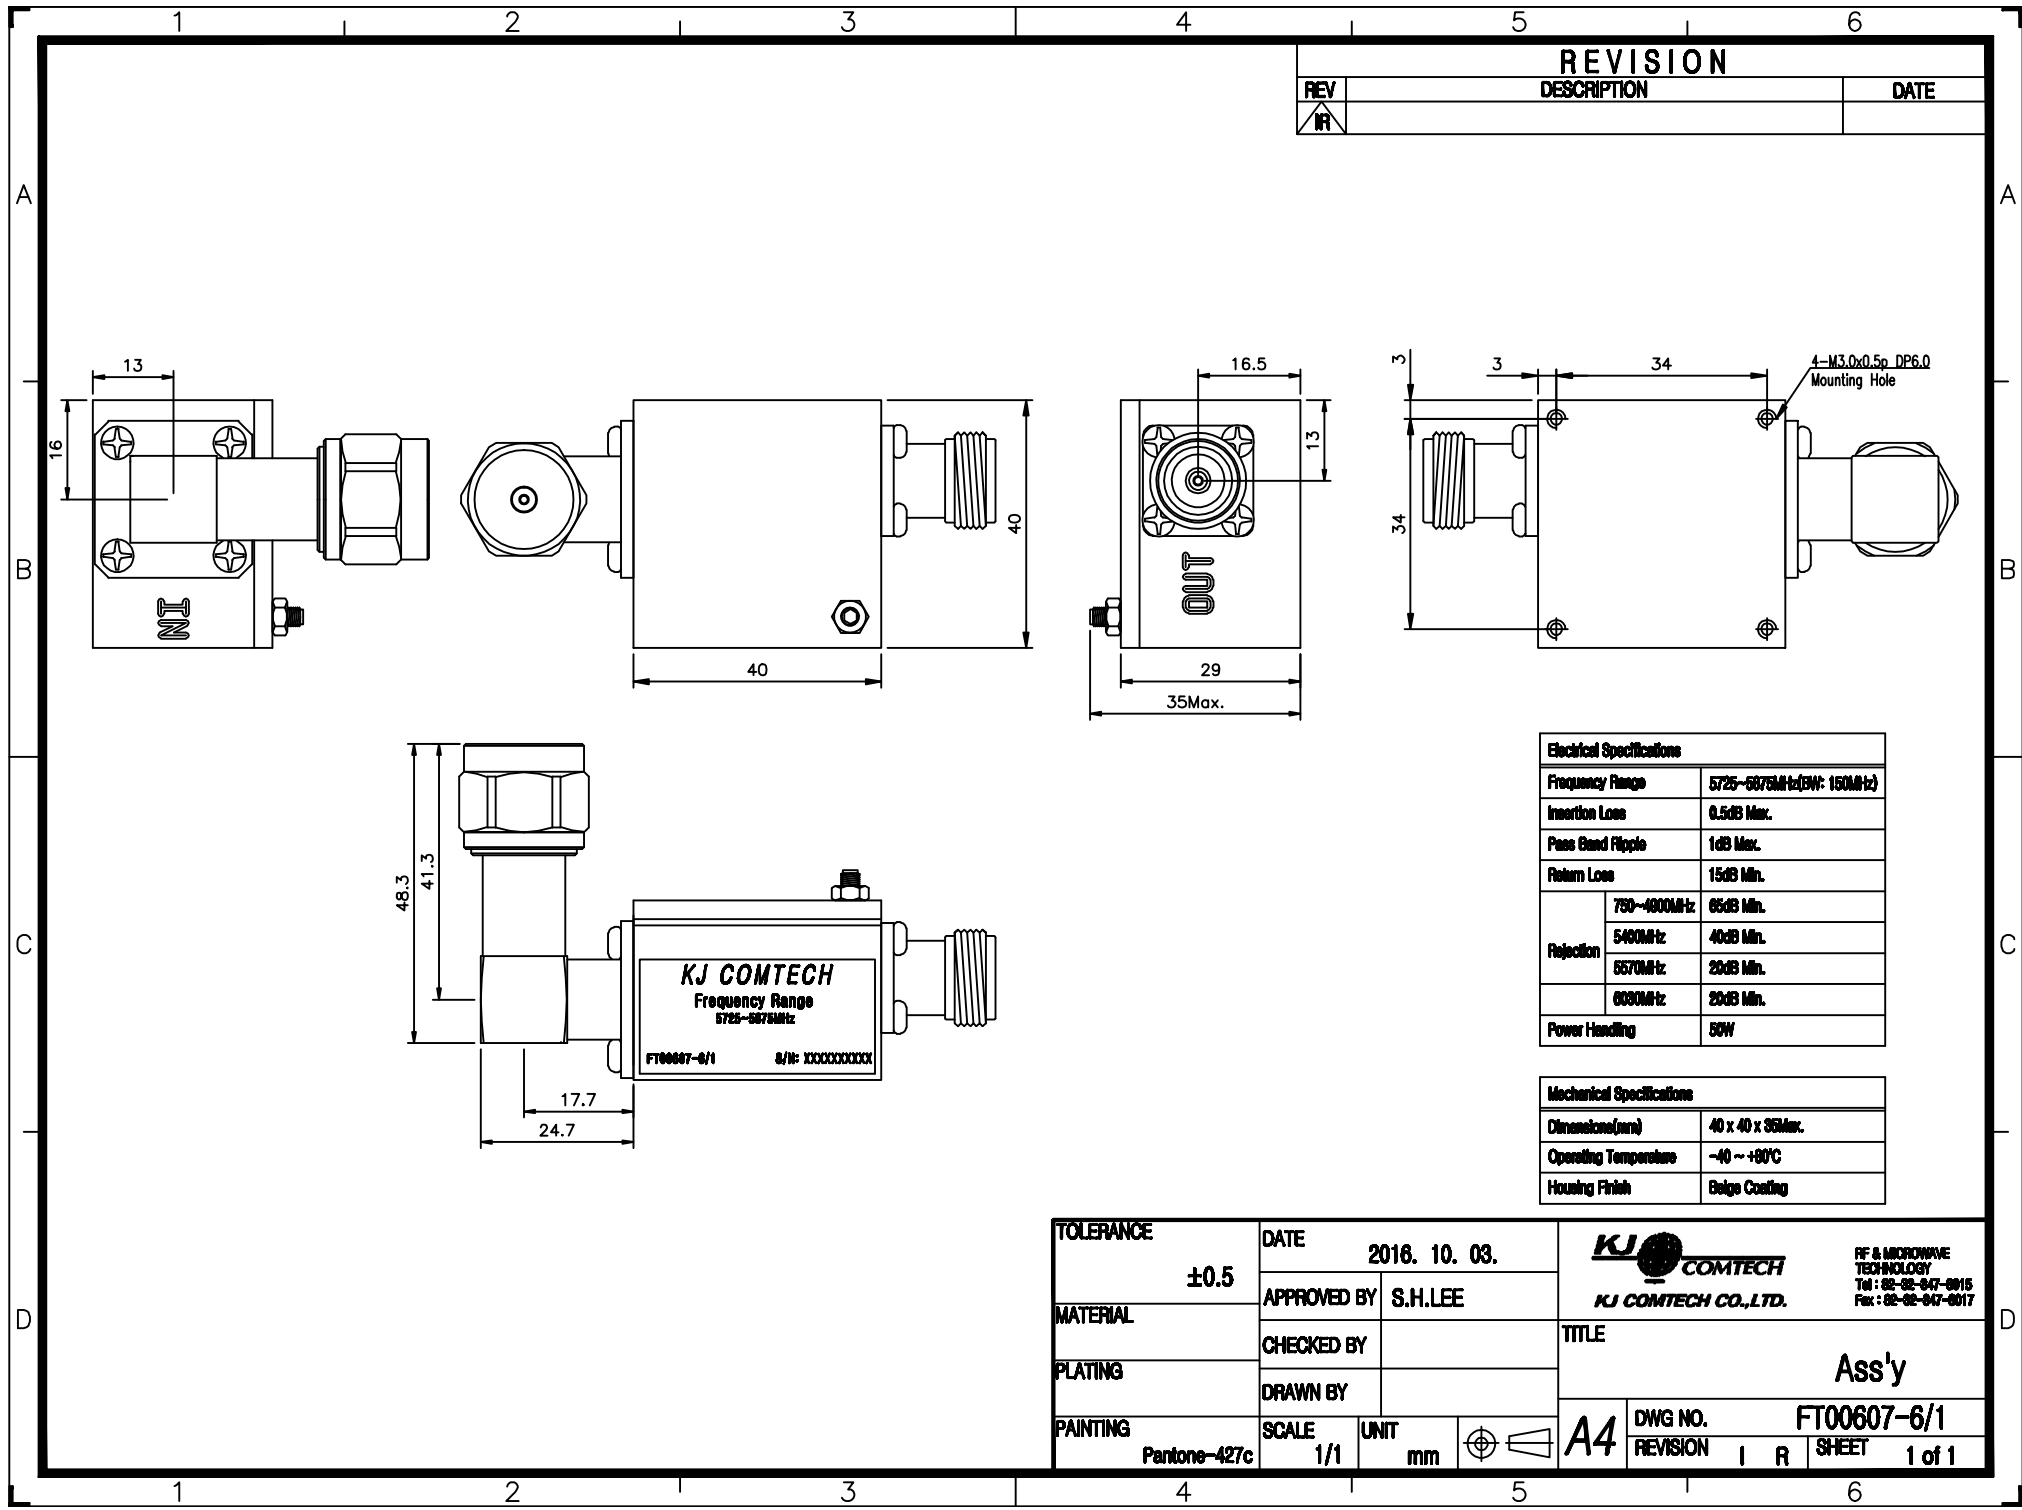

REVISION		
REV	DESCRIPTION	DATE
1/1		

Electrical Specifications	
Frequency Range	5725~5875MHz(BW: 160MHz)
Insertion Loss	0.5dB Max.
Pass Band Ripple	1dB Max.
Return Loss	15dB Min.
Rejection	750~4800MHz 65dB Min.
	5400MHz 40dB Min.
	6570MHz 20dB Min.
	6030MHz 20dB Min.
Power Handling	50W

Mechanical Specifications	
Dimensions(mm)	40 x 40 x 36Max.
Operating Temperature	-40 ~ +80°C
Housing Finish	Beige Coating

TOLERANCE ±0.5		DATE 2016. 10. 03.			 RF & MICROWAVE TECHNOLOGY Tel : 02-02-047-0015 Fax : 02-02-047-0017		
		APPROVED BY S.H.LEE					
MATERIAL		CHECKED BY			TITLE Ass'y		
PLATING		DRAWN BY					
PAINTING Pantone-427c		SCALE	UNIT		A4 DWG NO. FT00607-6/1 REVISION I R SHEET 1 of 1		
		1/1	mm				