


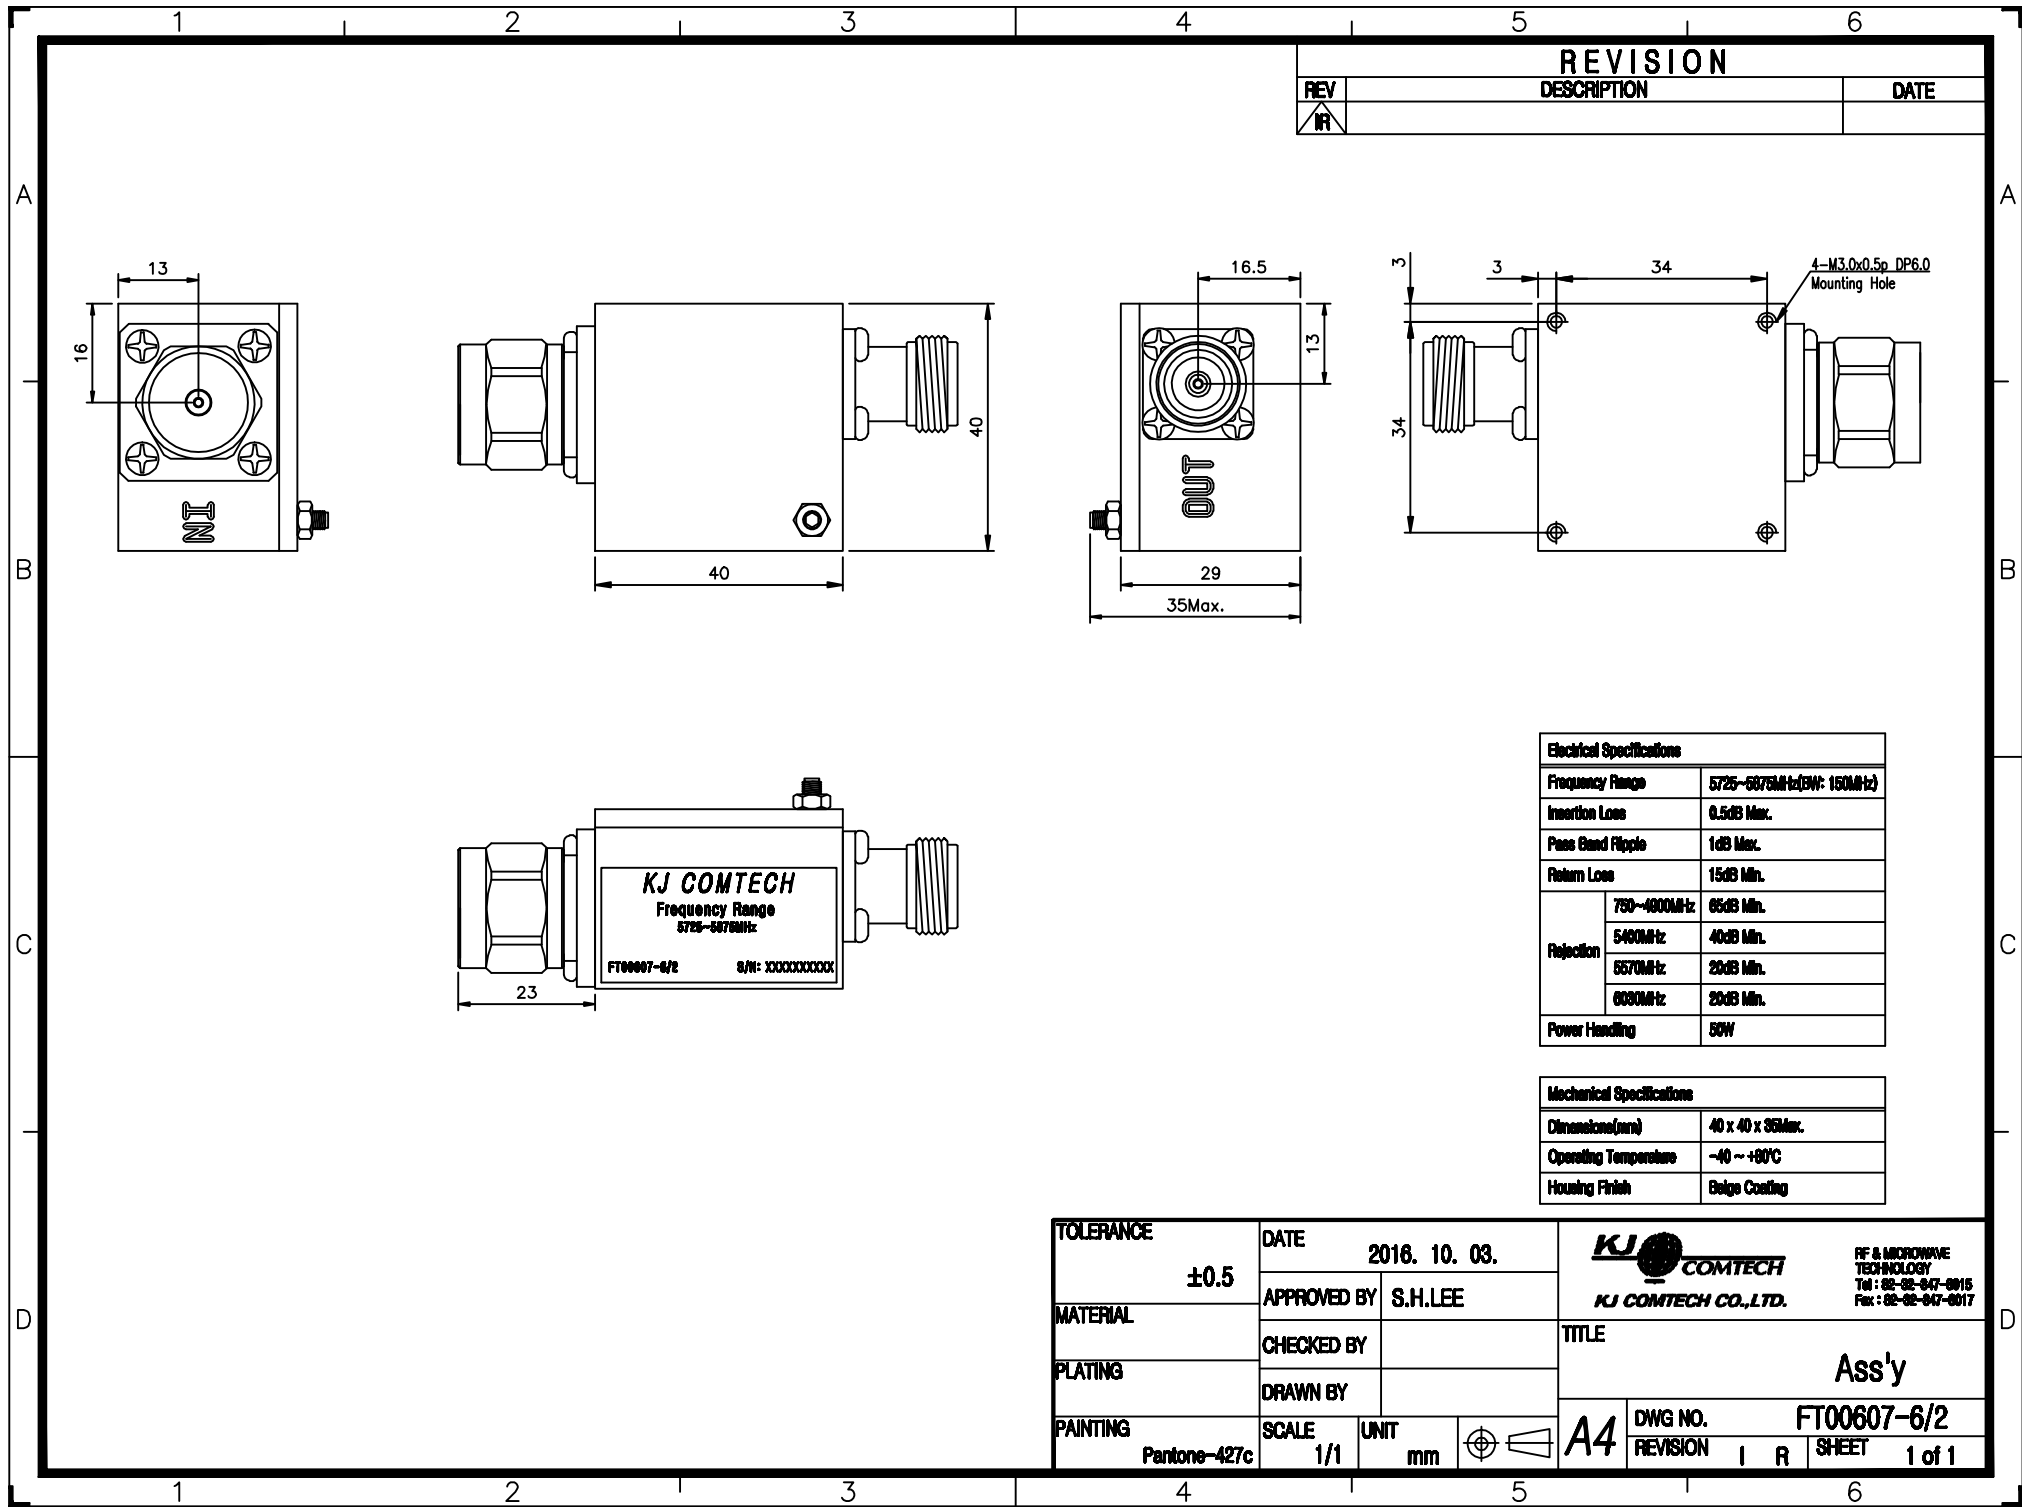

REVISION		
REV	DESCRIPTION	DATE
1/1		

Electrical Specifications	
Frequency Range	5725~6075MHz(BW: 160MHz)
Insertion Loss	0.5dB Max.
Pass Band Ripple	1dB Max.
Return Loss	15dB Min.
Rejection	750~4000MHz 65dB Min.
	5400MHz 40dB Min.
	6570MHz 20dB Min.
	8030MHz 20dB Min.
Power Handling	50W

Mechanical Specifications	
Dimensions(mm)	40 x 40 x 35Max.
Operating Temperature	-40 ~ +80°C
Housing Finish	Beige Coating

TOLERANCE	DATE		 RF & MICROWAVE TECHNOLOGY Tel : 82-82-847-8815 Fax : 82-82-847-8817				
	2016. 10. 03.						
±0.5	APPROVED BY	S.H.LEE		TITLE			
MATERIAL	CHECKED BY						
PLATING	DRAWN BY						
PAINTING	SCALE	UNIT		A4	DWG NO.	FT00607-6/2	
Pantone-427c	1/1	mm			REVISION	I R	SHEET