


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2017.06.29.

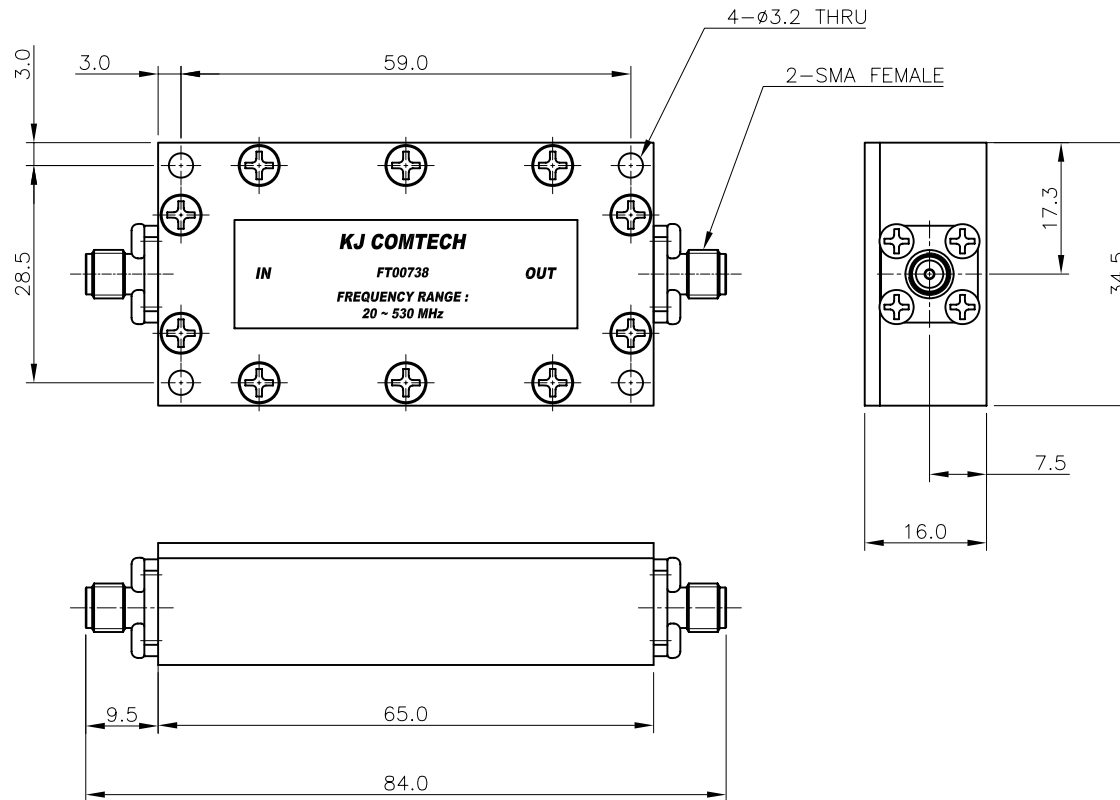


* ELECTRICAL SPECIFICATIONS

Pass Band Frequency Range : 20.0~530.0 MHz
 Pass Band Insertion Loss (Max.) : 0.5dB
 Pass Band Ripple(Max.) : 0.4dB
 Pass Band Return Loss (Max.) : 20dB
 Isolation (Min.) : 50.0dB @800 to 900MHz
 Power Handling (Max.) : 50.0W
 Impedance : 50Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (Gray DIC-653)
 CONNECTORS : MBsBD (Nickel Plate)
 CONNECTORS PINS : Beryllium Copper (Gold Plate)
 INSULATORS : TEFLON

TOLERANCE	Decimal ± 0.3	DATE 2017. 06. 29.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle $\pm 1^\circ$	APPROVED BY	J.H.YOUN		
MATERIAL	A6061 T6	CHECKED BY	T.J.KIM	TITLE LOW PASS FILTER	
		DRAWN BY	S.L.SON		
FINISH DIC-653(Gray)	SCALE 1/1	UNIT mm		DWG NO. FT00738-6/1 REVISION 1	SHEET 1 of 1