



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	K.S.KIM	S.L.SON	2023.03.07.

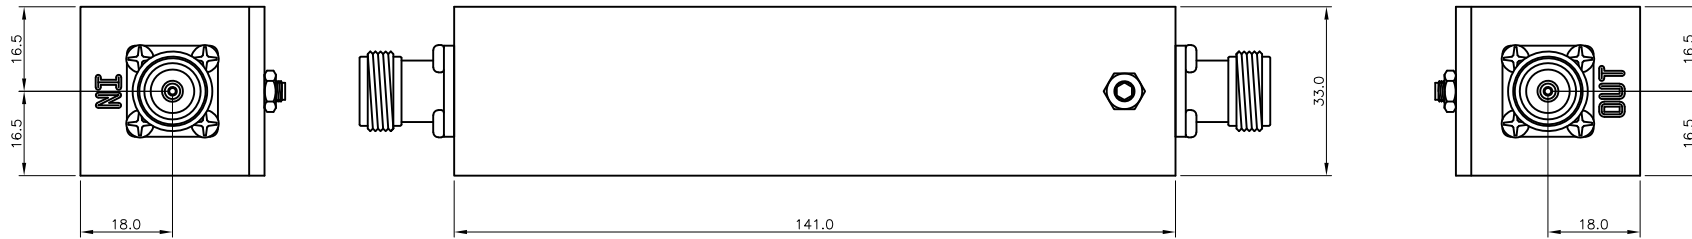


TOP VIEW

2- N TYPE FEMALE

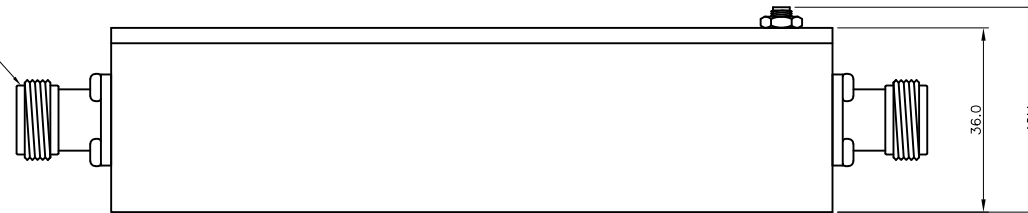

SIDE VIEW

4-M3.0XP0.5 DP6.0

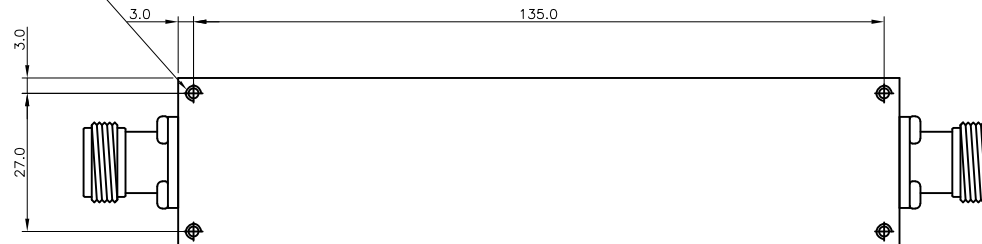

BOTTOM VIEW

***ELECTRICAL SPECIFICATION**

Frequency Range : 1555 MHz ~ 1610 MHz
Insertion Loss : 1.2dB Max.
Ripple : 0.8dB Max.
Return Loss : 18dB Min.
Attenuation
FC $\pm$ 60MHz : 10dB Min.
FC $\pm$ 80MHz : 30dB Min.
Power Handling : 20W Max.
Impedance : 50 Ω
Connector : N Type (F)
Operating Temperature : -20~+70 $^{\circ}$ C
Finish : Black Coating

TOLERANCE	Decimal ± 0.3	DATE	2023. 03. 07.	 KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle $\pm 1^{\circ}$	APPROVED BY	S.L.SON	
MATERIAL	A6061 T6	CHECKED BY	S.L.SON	TITLE Band Pass Filter
		DRAWN BY	K.S.KIM	
FINISH	Black	SCALE	1/1	DWG NO. FT00775-N/1 REVISION 1 SHEET 1 of 1
		UNIT	mm	