


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	T.J.KIM	J.H.YOUN	2015.10.15.

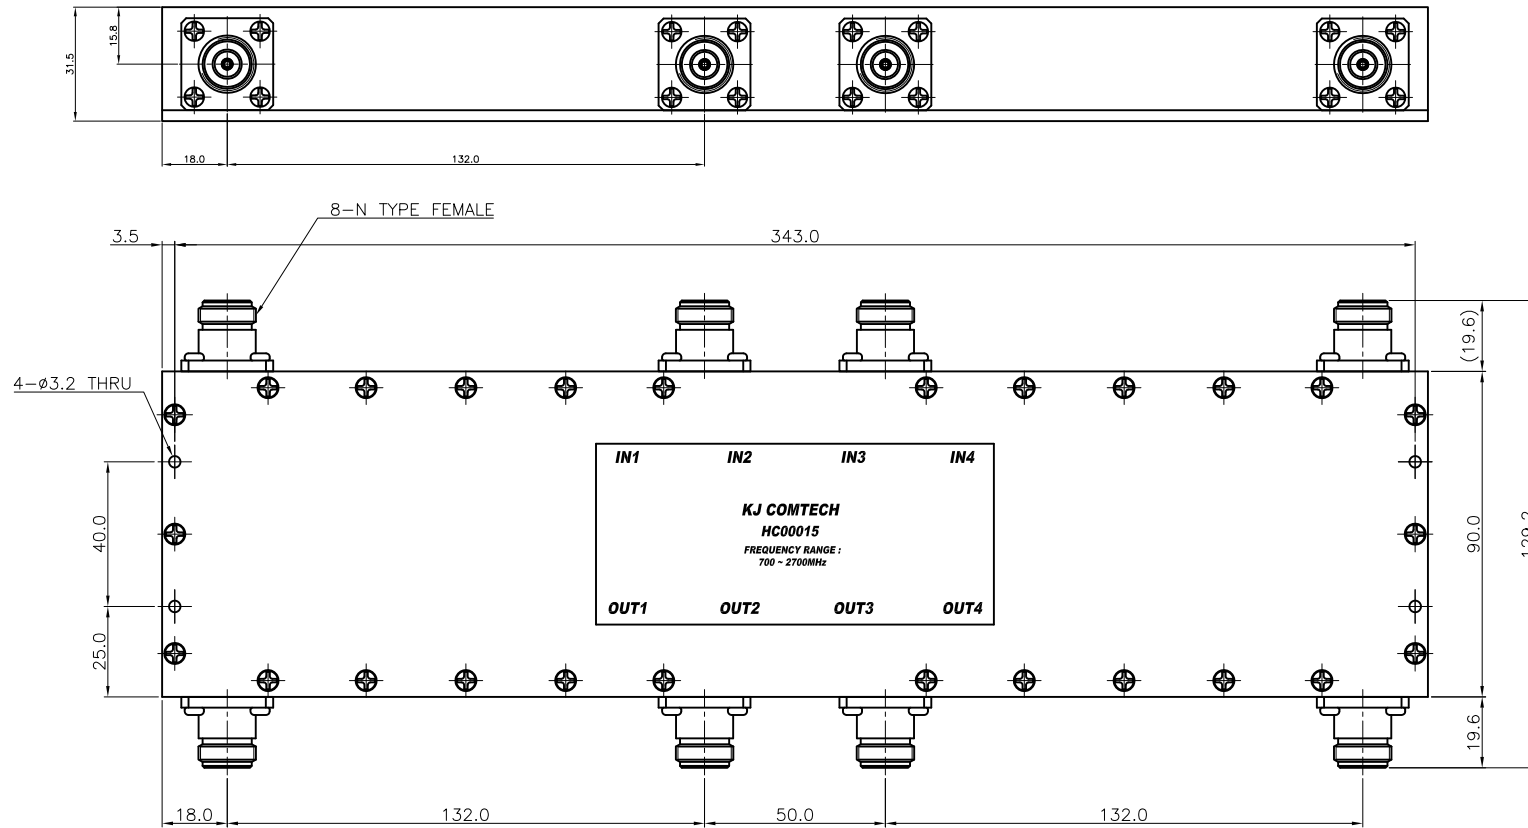

* ELECTRICAL SPECIFICATIONS
Frequency Range : 700~2700 MHz
Insertion Loss (Max.) : 7.4 dB
All Port V.S.W.R (Max.) : 1.3 : 1
Isolation (Min.) : 23.0 dB
Power : 120 W
PIMD : -150dBc(@43dBm 2 Tone,
CDMA,WCDMA)
Impedance : 50 Ω

* ENVIRONMENTAL SPECIFICATIONS
Operating temperature : -40 ~ +70°C
(5~95% Humidity)
Environmental Class : IP65

* MECHANICAL SPECIFICATIONS
Housing : A6061 T6 (DIC-582 Texture)
Connector : MBsBD (SUCO)
Connector pin : Beryllium Copper (Silver plate)

*TEXT SPECIFICATIONS
FONT : Arial White
Text Size : 2.3mm

TOLERANCE	Decimal	DATE		 RF & MICROWAVE TECHNOLOGY KJ COMTECH CO.,LTD. Tel : 82-32-347-8015 Fax : 82-32-347-8017			
	Angle	APPROVED BY	J.H.YOUN				
MATERIAL	± 0.1	CHECKED BY	S.L.SON	TITLE			
	± 1°	DRAWN BY	T.J.KIM				
A6061 T6		4X4 HYBRID COUPLER		DWG NO. HC00015-6/1			
FINISH	Liquid Coating(DIC-584)	SCALE	UNIT		A4		
		1/1	mm	REVISION		1	SHEET