


REVISION		
REV	DESCRIPTION	DATE
△		
△		

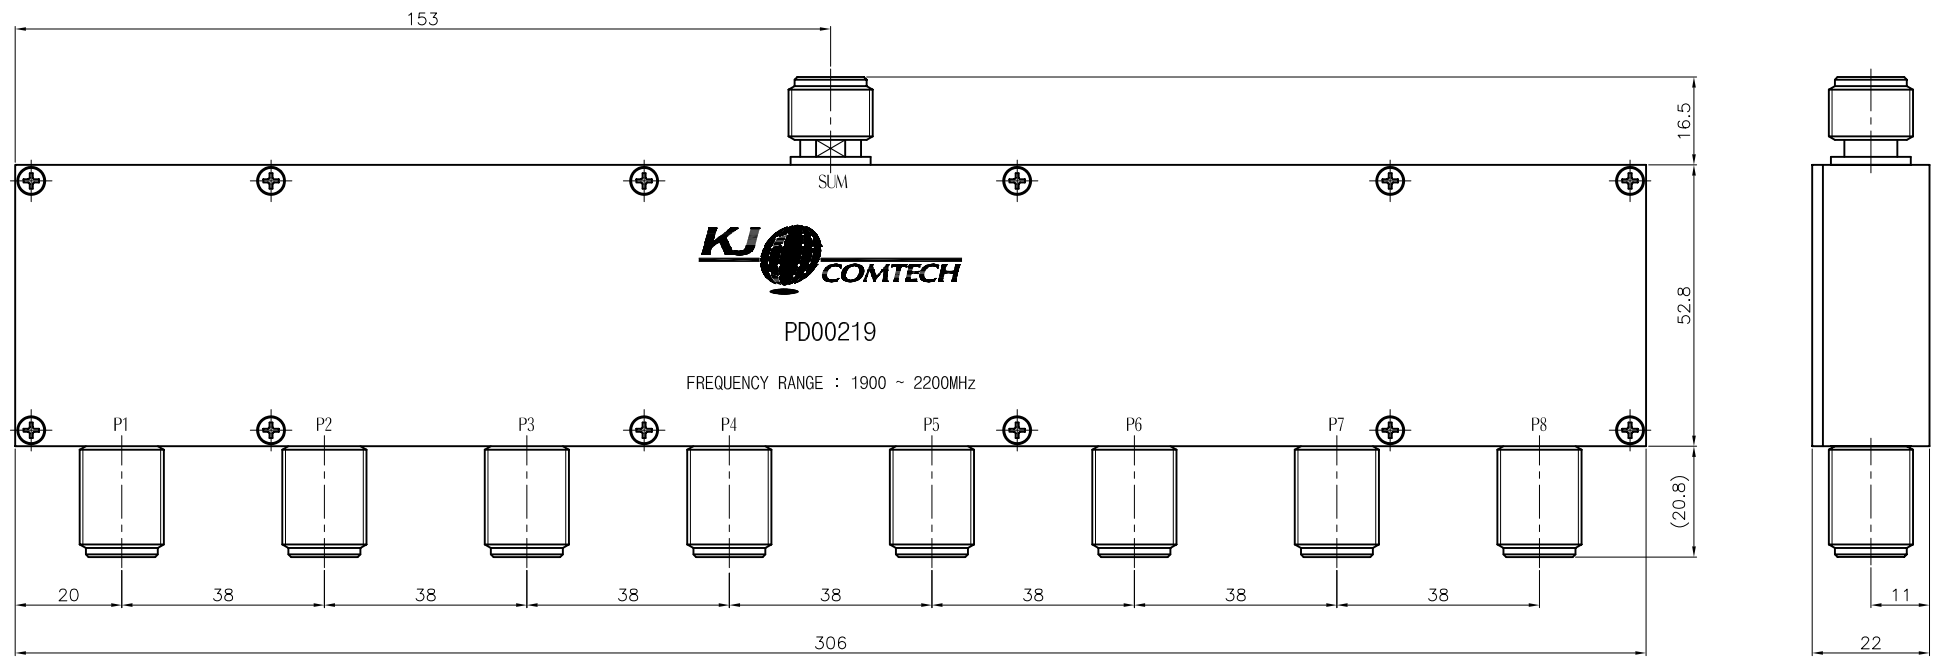

*** ELECTRICAL SPECIFICATIONS**

Frequency Range : 1900.0 ~ 2200.0MHz
 Insertion Loss (Max.) : 9.63dB
 Input V.S.W.R (Max.) : 1.22 : 1
 Isolation (Min.) : 20.0dB
 Amplitude Unbalance (Max.) : 0.3dB
 Phase Unbalance (Max.) : 6.0°
 Power Handling (Max.) : 1.0W
 Impedance : 50Ω

*** MECHANICAL SPECIFICATIONS**

HOUSING : A6061 T6 (Yellow Chromate)
 CONNECTORS : MBsBD (Nickel Plate)
 CONNECTORS PINS : Beryllium Copper (Gold Plate)
 INSULATORS : TEFLON

REVISION		I	R	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS
TOLERANCE	Decimal			DATE		2002. 10. 14.	 KJ COMTECH CO.,LTD.	RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	± 0.3			APPROVED BY						
	Angle			CHECKED BY						
MATERIAL		A6061 T6		DRAWN BY			TITLE <i>8WAY POWER DIVIDER</i>			
FINISH		SCALE		UNIT			A3	DWG NO. <i>PD00219-7/1</i>		
Yellow Chromate		1/1		mm				SHEET 1 OF 1		