


REVISION		
REV	DESCRIPTION	DATE
1	업체 요구로 인한 BAR CODE 추가(설번200810-0030)	2008.10.31.

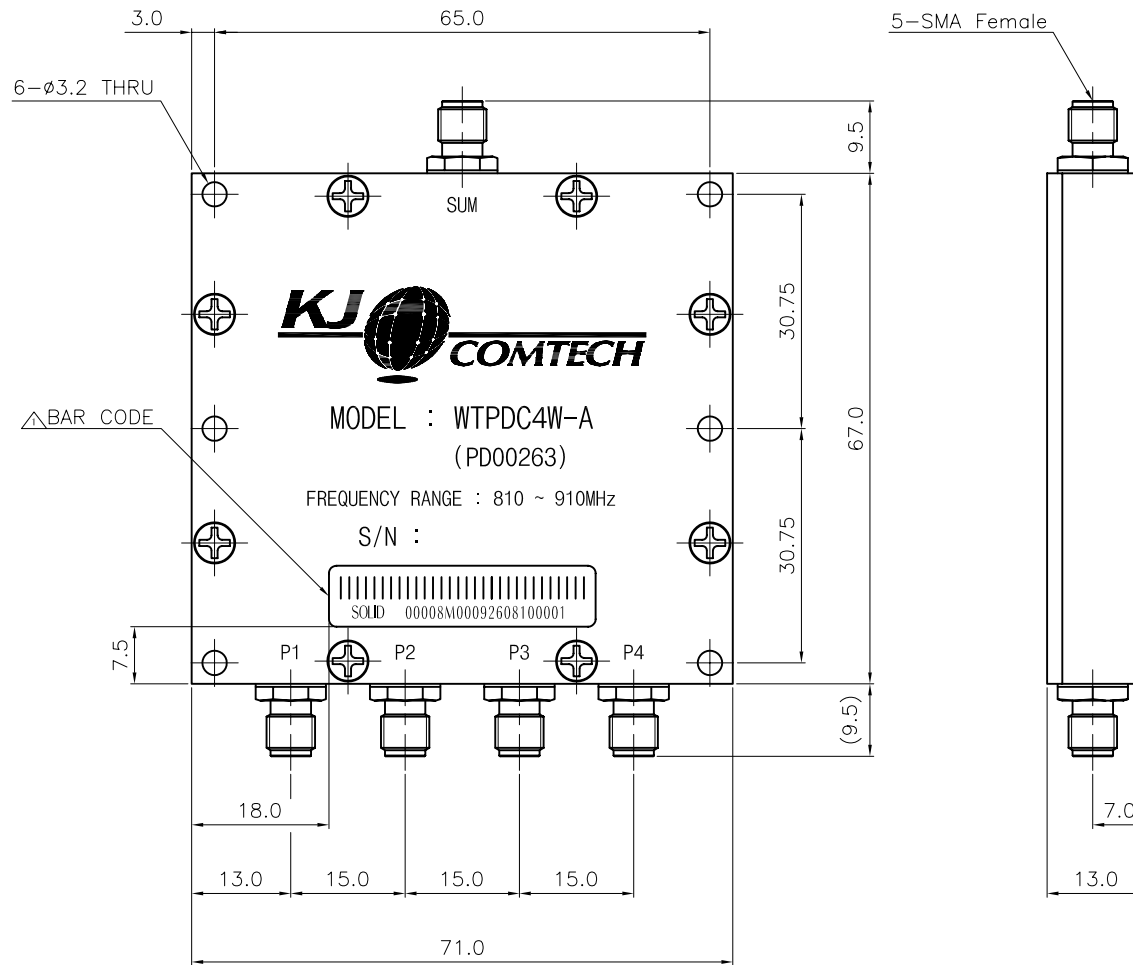


* S/N 기재 예시 - 2008020001
 년 월 일 진행 순번

* ELECTRICAL SPECIFICATIONS
 Frequency Range : 810.0 ~ 910.0MHz,
 190.0 ~ 210.0MHz(Modem)
 Insertion Loss (Max.) : 810.0 ~ 910.0MHz - 6.5dB,
 190.0 ~ 210.0MHz - 10dB

V.S.W.R (Max.) : 1.2 : 1
 Isolation (Min.) : 20.0dB
 Phase Unbalance (Max.) : 2.0°
 Power Handling (Max.) : 1.0W
 Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
 HOUSING : A6061 T6 (White Chromate)
 CONNECTORS : MBsBD (Nickel Plate)
 CONNECTORS PINS : Beryllium Copper (Gold Plate)
 INSULATORS : TEFLON

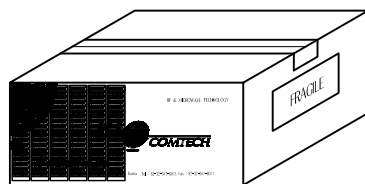

* 바코드 라벨 부착

1. 제품 : 상단 도면을 참조하여 해당 위치에 부착
2. BOX : 좌측 도면을 참조하여 BOX의 앞단 좌측 부터 부착

REVISION	REV.A	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS
TOLERANCE	Decimal	DATE 2008. 3. 7.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.			
	± 0.3	APPROVED BY		S.W.LEE				
	Angle	CHECKED BY		J.H.YOUN				
MATERIAL	A6061 T6	DRAWN BY		K.I.CHO	TITLE 4WAY POWER DIVIDER			
FINISH White Chromate	SCALE 1/1	UNIT mm		A4	DWG NO.	PD00263-7/2		
					SHEET	1	OF	1