
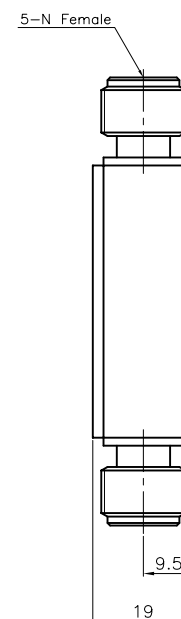


REVISION		
REV	DESCRIPTION	DATE
△		
△		

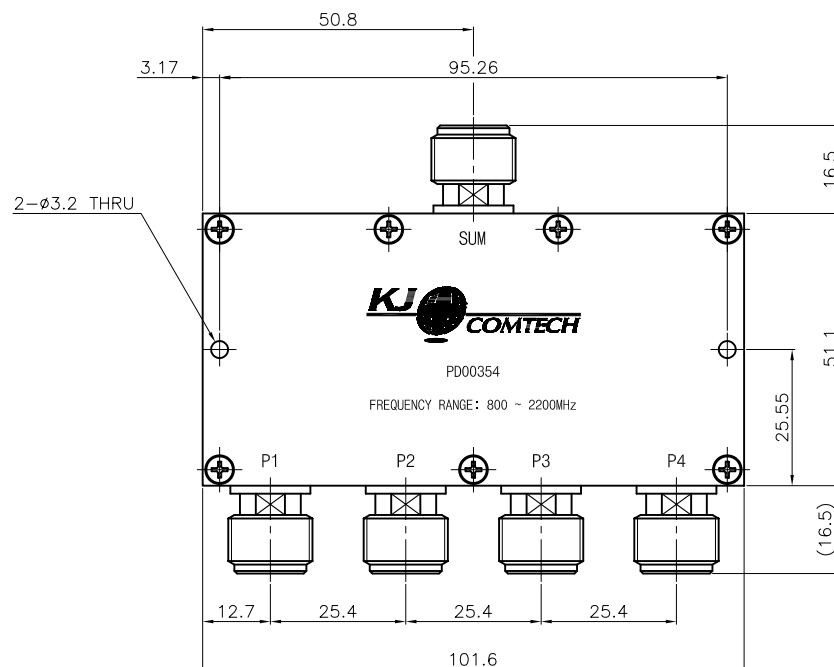

* ELECTRICAL SPECIFICATIONS
Frequency Range : 800.0 ~ 2200.0MHz
Insertion Loss (Max.) : 6.82dB
V.S.W.R (Max.) : Input 1.35 : 1,
Output 1.25 : 1
Isolation (Min.) : 20.0dB
Amplitude Unbalance (Max.) : 0.2dB
Phase Unbalance (Max.) : 4.0°
Power Handling (Max.) : 1.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

REVISION		I	R	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS
TOLERANCE	Decimal			DATE		2008. 10. 2.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.		
	± 0.3			APPROVED BY		S.W.LEE				
	Angle			CHECKED BY		J.H.YOUN				
MATERIAL		A6061 T6		DRAWN BY		K.I.CHO		TITLE 4WAY POWER DIVIDER		
FINISH		SCALE		UNIT		A3		DWG NO. PD00354-7/1 SHEET 1 OF 1		
White Chromate		1/1		mm						