
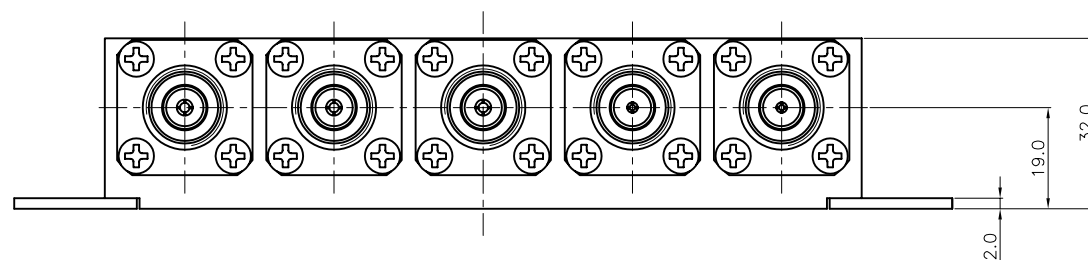


REVISION		
REV	DESCRIPTION	DATE
△		
△		

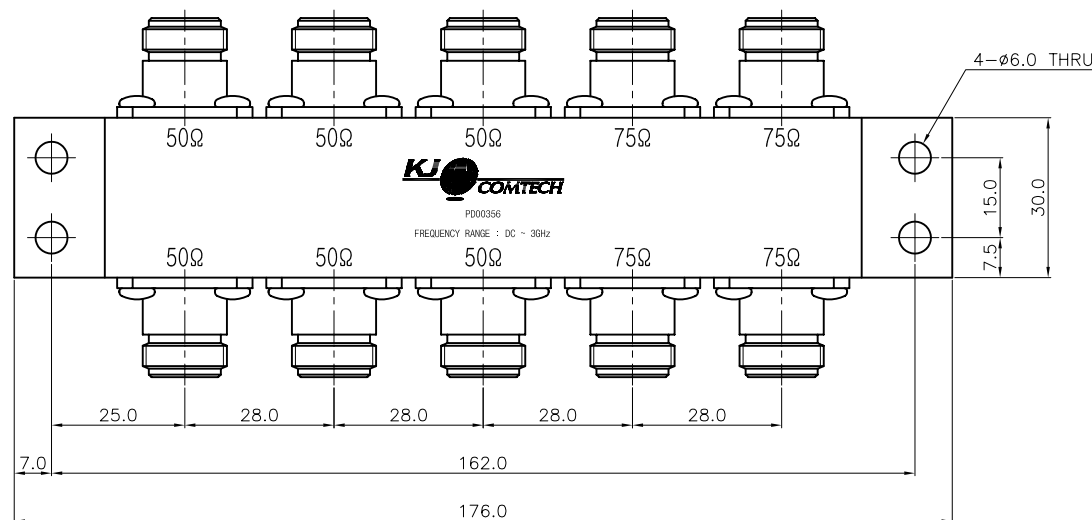

* ELECTRICAL SPECIFICATIONS

Frequency Range : 300kHz ~ 3000.0MHz

Insertion Loss (Max.) : 0.15dB

V.S.W.R (Max.) : 1.2 : 1

Impedance : 50Ω

Frequency Range : 300kHz ~ 3000.0MHz

Insertion Loss (Max.) : 0.15dB

V.S.W.R (Max.) : 1.2 : 1

Impedance : 75Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (White Chromate)

CONNECTORS : MBsBD (Nickel Plate)

CONNECTORS PINS : Beryllium Copper (Gold Plate)

INSULATORS : TEFLON

REVISION		I	R	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS
TOLERANCE	Decimal			DATE		2008. 10. 21.	 KJ COMTECH CO.,LTD.	RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	± 0.3			APPROVED BY						
	Angle			CHECKED BY						
MATERIAL				DRAWN BY			TITLE <i>1WAY POWER DIVIDER</i>			
A6061 T6										
FINISH		SCALE		UNIT			A3	DWG NO. <i>PD00356-7/1</i>		
White Chromate		1/1		mm				SHEET 1 OF 1		