
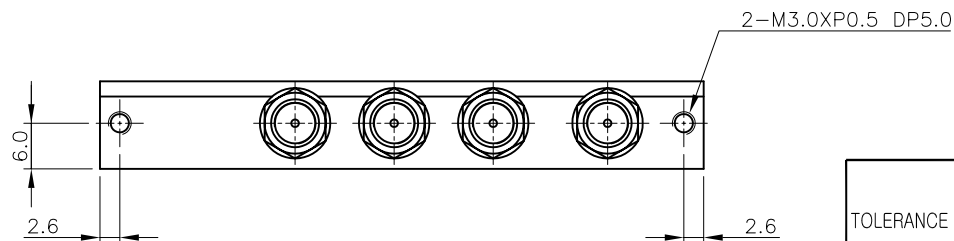
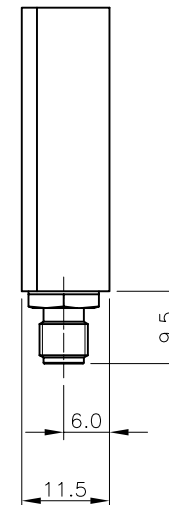
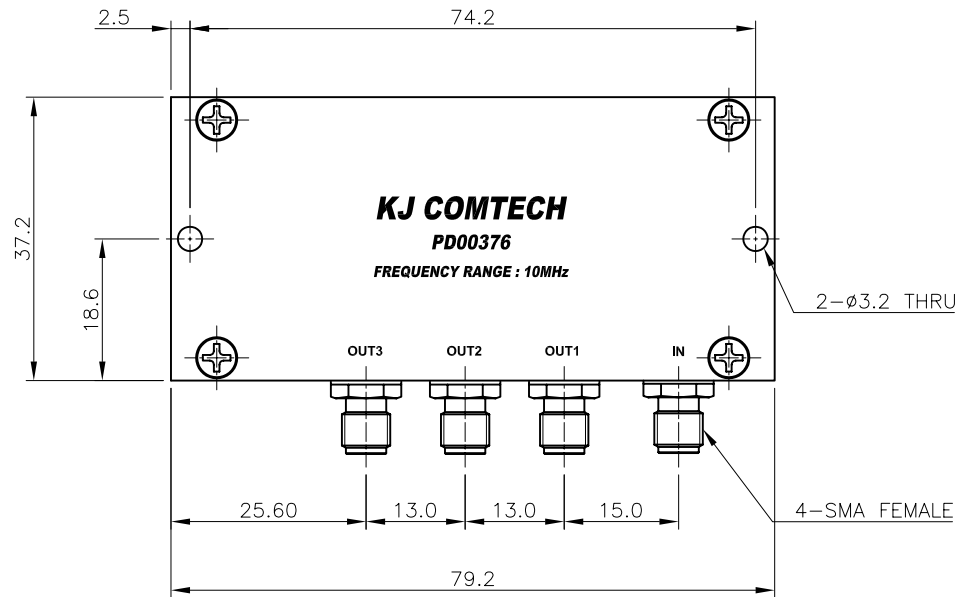


REVISION		
REV	DESCRIPTION	DATE
IR	Initial Registration	2009.03.04.

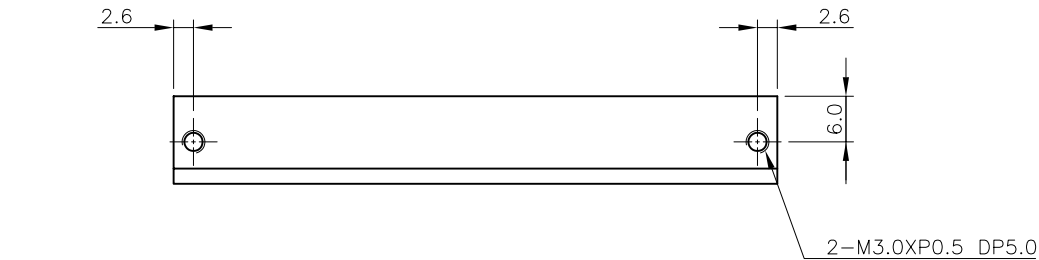

* ELECTRICAL SPECIFICATIONS

Frequency Range : 10.0MHz
Insertion Loss (Max.) : 5.8dB
V.S.W.R (Max.) : 1.25 : 1
Isolation (Min.) : 18.0dB
Power Handling (Max.) : 1.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

TOLERANCE	Decimal	DATE	2009. 3. 4.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN	
MATERIAL	±1°	CHECKED BY	M.H.LEE	KJ COMTECH CO.,LTD. TITLE 3WAY POWER DIVIDER
	A6061 T6	DRAWN BY	K.I.CHO	
FINISH	White Chromate	SCALE	1/1	A4 DWG NO. PD00376-7/1 REVISION I R SHEET 1 of 1
		UNIT	mm	