
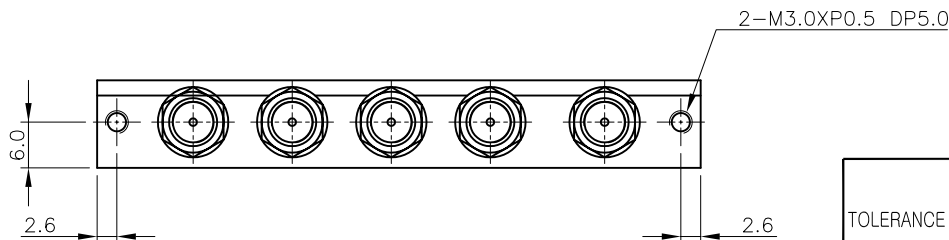
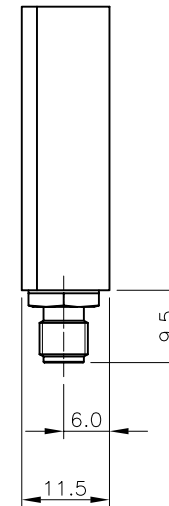
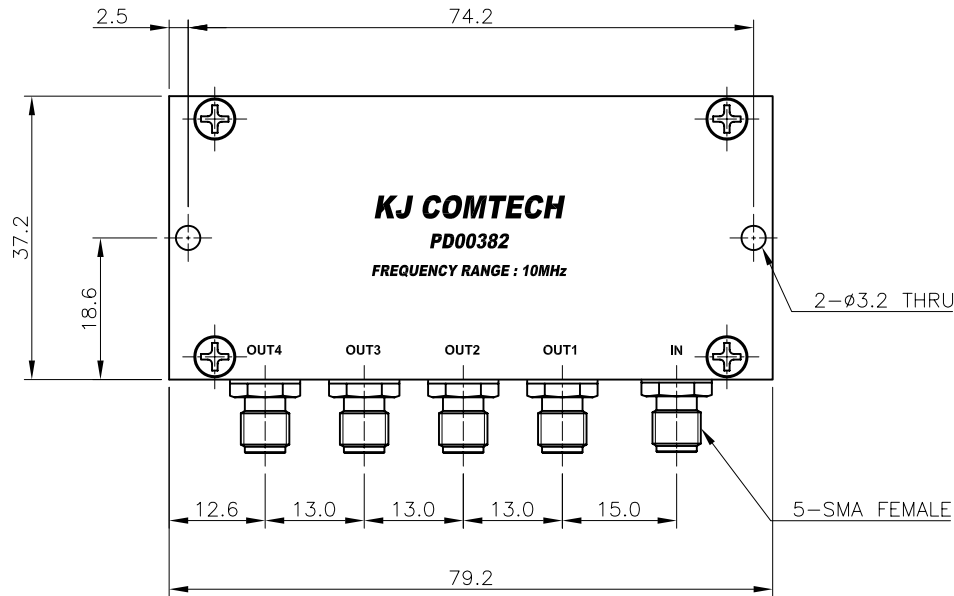


REVISION		
REV	DESCRIPTION	DATE
IR	Initial Registration	2009.04.24.

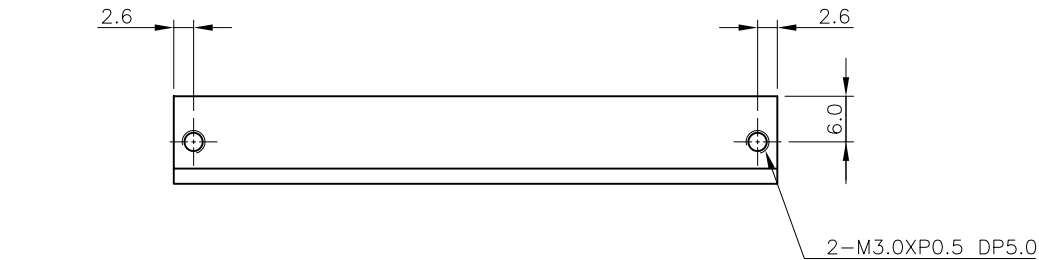


* ELECTRICAL SPECIFICATIONS

Frequency Range : 10.0MHz
Insertion Loss (Max.) : 6.8dB
V.S.W.R (Max.) : 1.25 : 1
Isolation (Min.) : 18.0dB
Power Handling (Max.) : 1.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

TOLERANCE	Decimal	DATE			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017			
	± 0.3	2009. 04. 24.						
	Angle	APPROVED BY	J.H.YOUN					
MATERIAL	$\pm 1^\circ$	CHECKED BY	M.H.LEE			TITLE		
	A6061 T6	DRAWN BY	K.I.CHO				4WAY POWER DIVIDER	
FINISH	White Chromate	SCALE	UNIT		A4	DWG NO.		PD00382-7/1
		1/1	mm			REVISION	I R	SHEET