


REVISION		
REV	DESCRIPTION	DATE
1R	Initial Registration	2009.08.31.

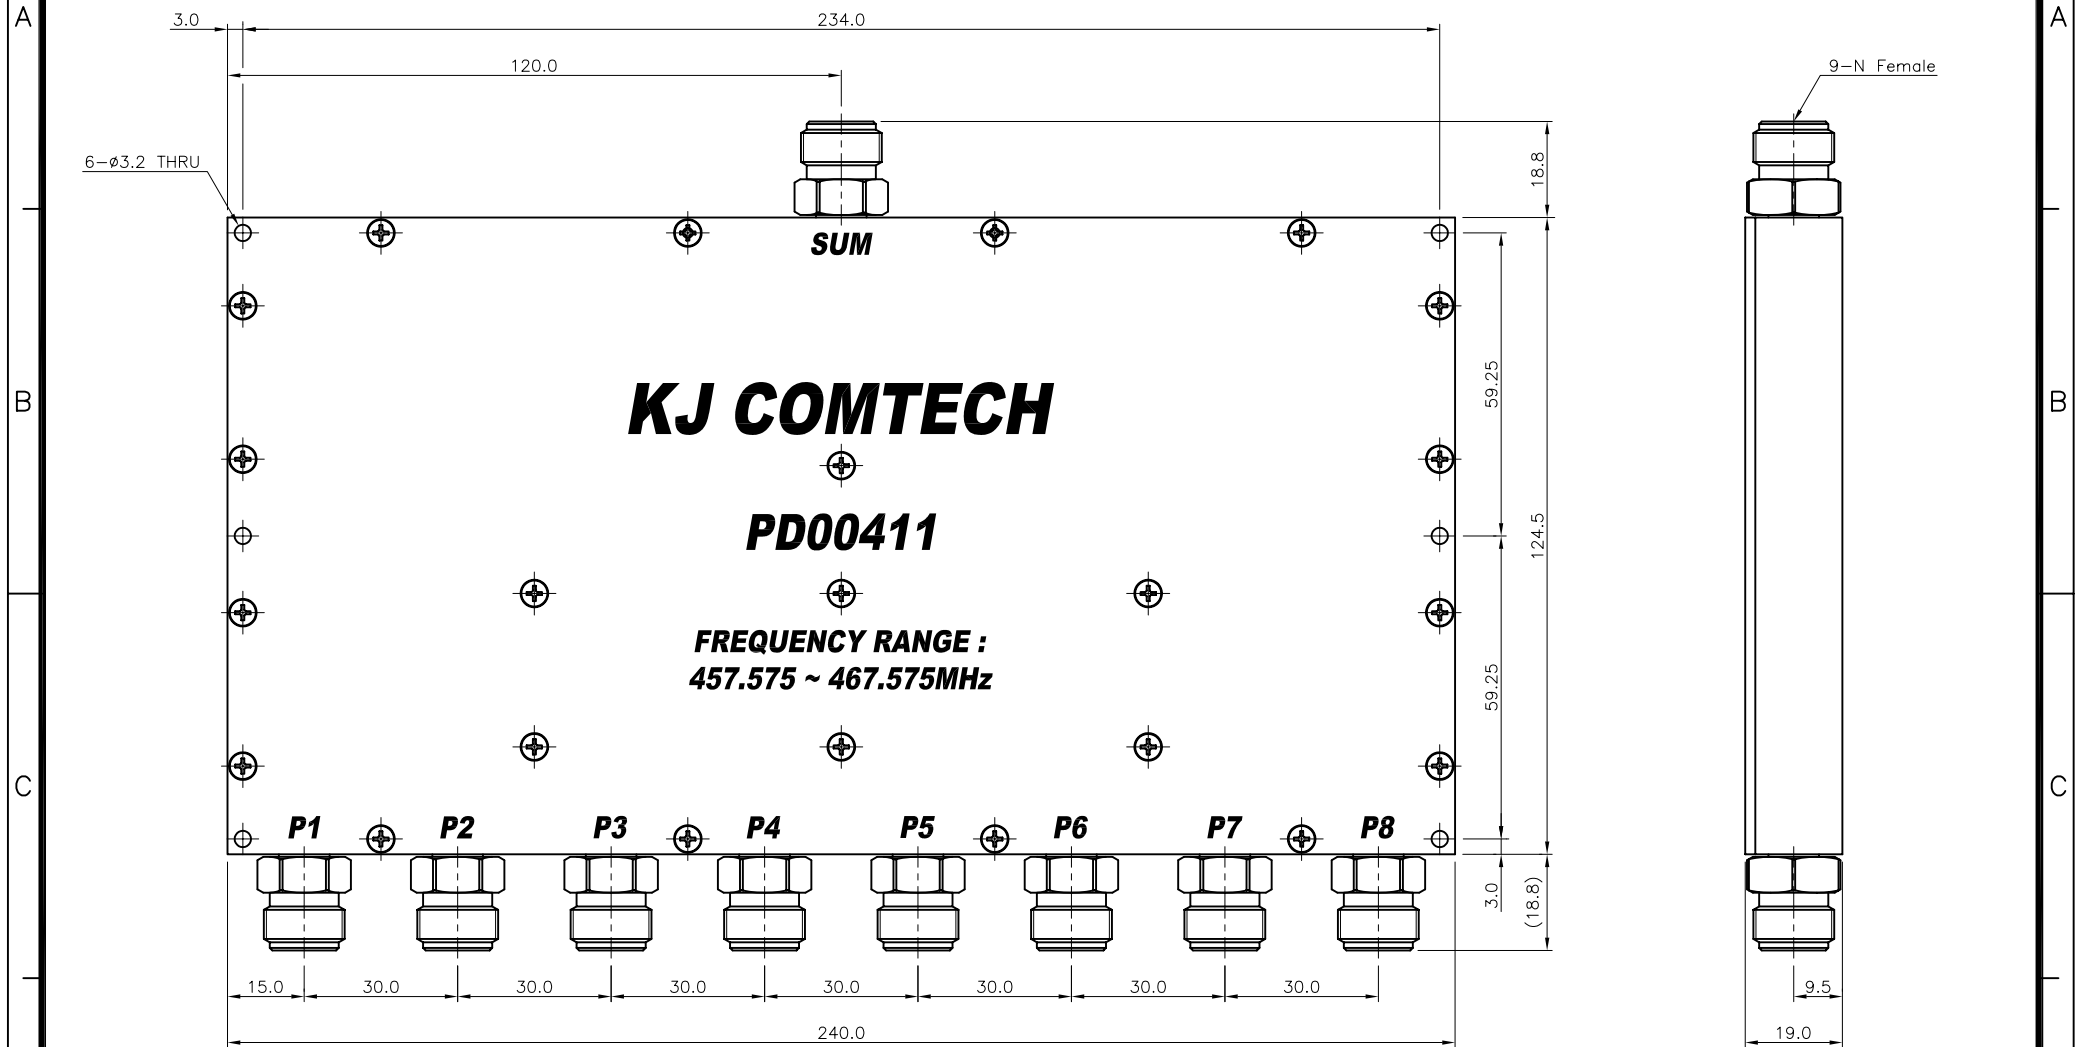

* ELECTRICAL SPECIFICATIONS
Frequency Range : 457.575 ~ 467.575MHz
Insertion Loss (Max.) : 10.2dB
V.S.W.R (Max.) : 1.2 : 1
Isolation (Min.) : 20.0dB
Power Handling (Max.) : 40.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

* OTHER SPECIFICATIONS
MARKING COLOR : BLACK

TOLERANCE	Decimal	DATE	2009. 08. 31.
	Angle	APPROVED BY	J.H.YOUN
MATERIAL	±0.3	CHECKED BY	M.H.LEE
	±1°	DRAWN BY	K.I.CHO
FINISH	A6061 T6	SCALE	1/1
	White Chromate	UNIT	mm

		RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
KJ COMTECH CO.,LTD.		TITLE 8WAY POWER DIVIDER	
DWG NO. PD00411-7/1		SHEET 1 of 1	
REVISION I R			