


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	K.I.CHO	J.H.YOUN	2010.12.30.

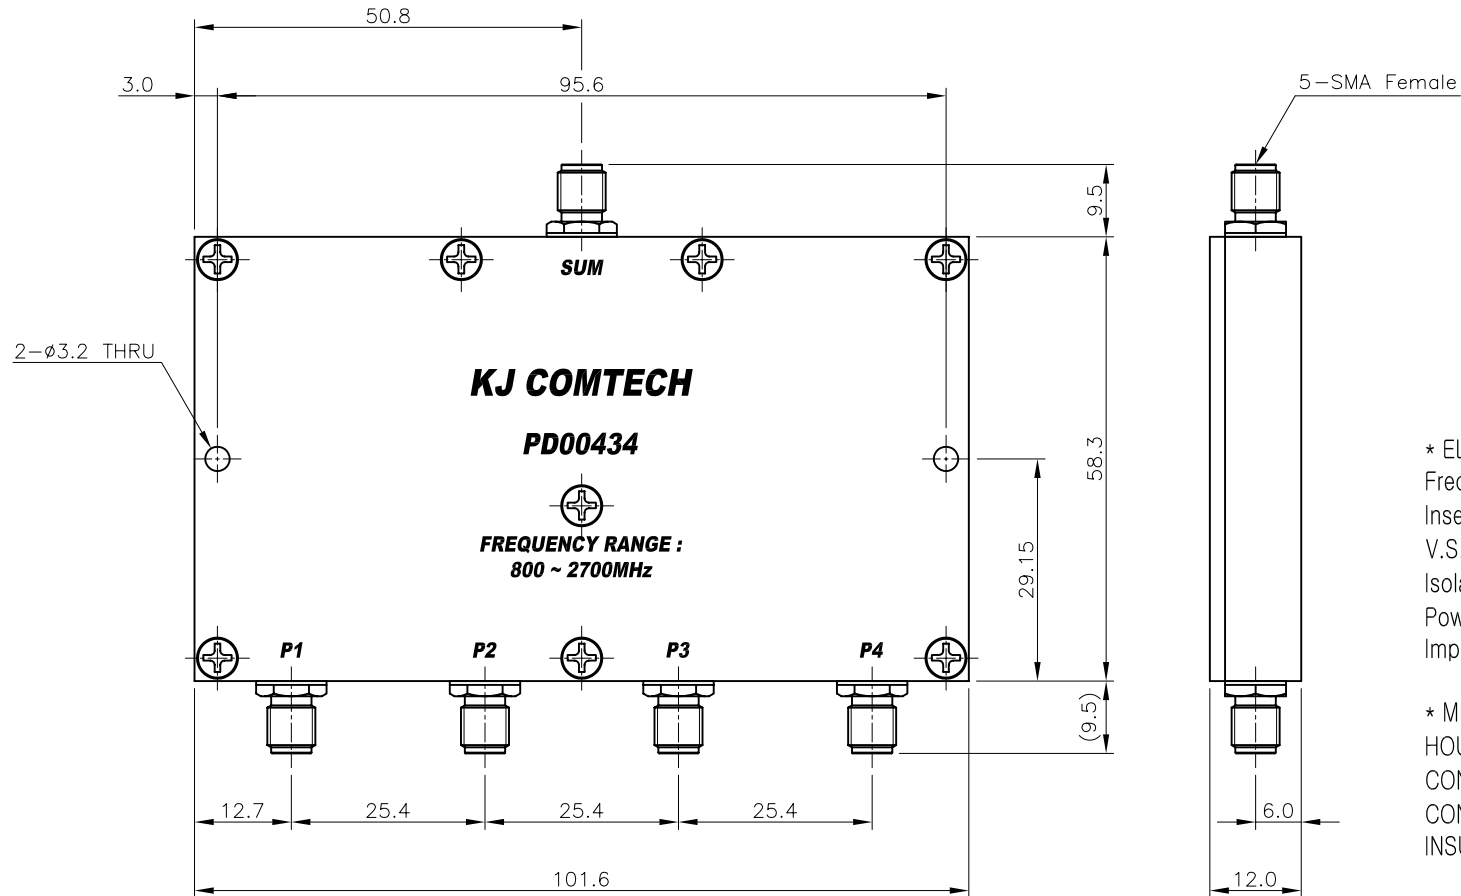

* ELECTRICAL SPECIFICATIONS
Frequency Range : 800.0 ~ 2700.0MHz
Insertion Loss (Max.) : 7.0dB
V.S.W.R (Max.) : 1.25 : 1
Isolation (Min.) : 20.0dB
Power Handling (Max.) : 1.0W
Impedance : 50.0 Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

* OTHER SPECIFICATIONS
MARKING COLOR : BLACK

TOLERANCE	Decimal	DATE			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017			
	±0.3	2010. 12. 30.						
	Angle	APPROVED BY	J.H.YOUN					
MATERIAL	±1°	CHECKED BY				TITLE 4WAY POWER DIVIDER		
	A6061 T6	DRAWN BY					K.I.CHO	
	FINISH	SCALE	UNIT				A4	DWG NO.
White Chromate	1/1	mm	REVISION			I		R