


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	T.J.KIM	J.H.YOUN	2016.01.20.

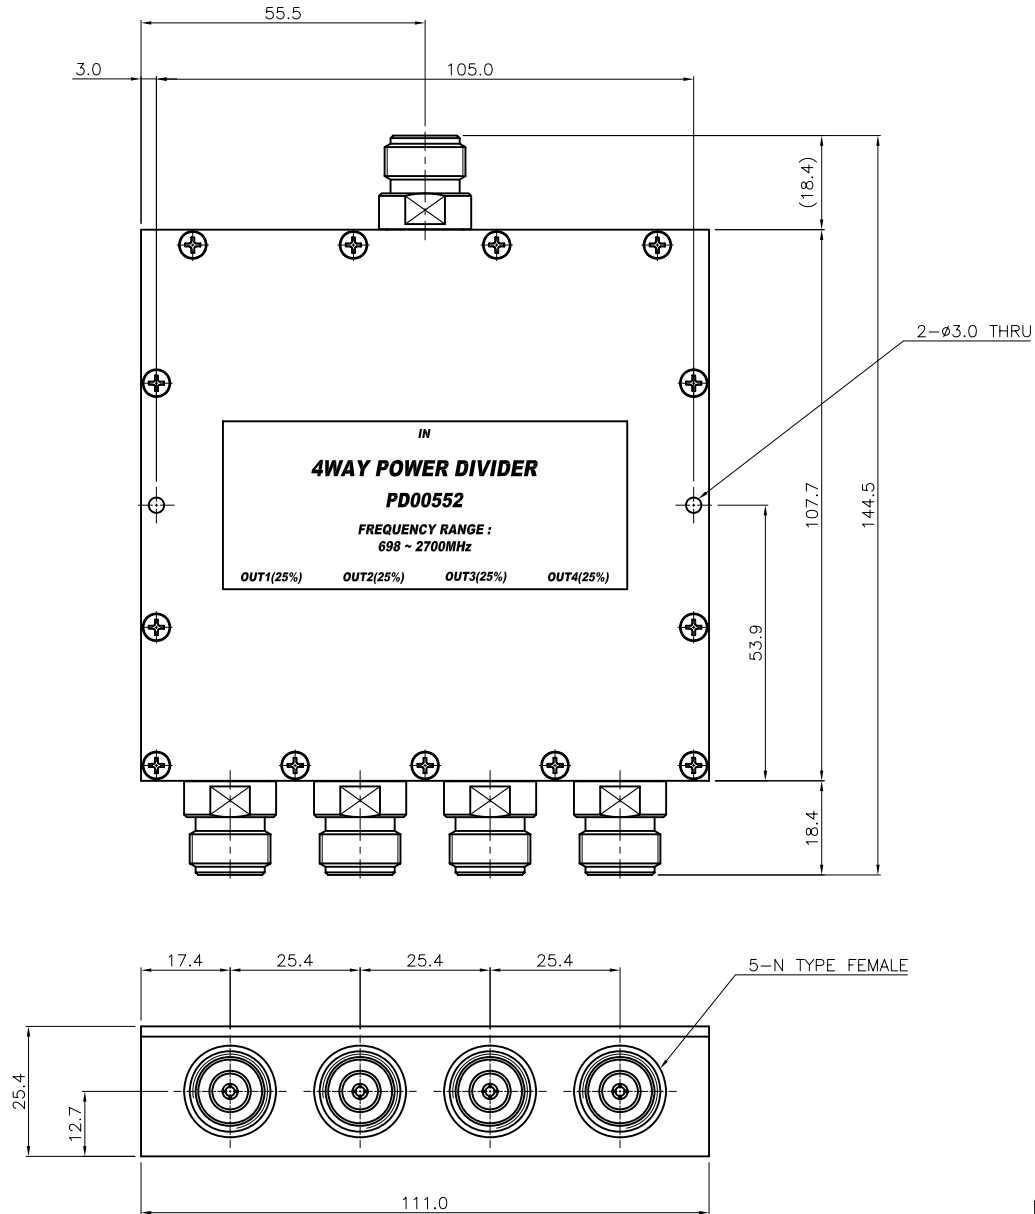

* ELECTRICAL SPECIFICATIONS
 Frequency Range : 698~2700MHz
 Insertion Loss (Max.) : 6.6dB
 VSWR(Max.) : 1.25 : 1
 Isolation (Min.) : 20.0dB
 Power Handling (Max.) : 10.0W
 Impedance : 50 Ω
 Amplitude Balance(Max.) : 0.3dB

* MECHANICAL SPECIFICATIONS
 HOUSING : A6061 T6 (White Chromate)
 CONNECTORS : MBsBD (Nickel Plate)
 CONNECTORS PINS : Beryllium Copper (Gold Plate)
 INSULATORS : TEFLON

*ENVIRONMENT SPECIFICATIONS
 -30 ~ +60°C

TOLERANCE	Decimal ±0.3	DATE 2016. 01. 20.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY J.H.YOUN	
MATERIAL A6061 T6	CHECKED BY S.L.SON	TITLE 4WAY POWER DIVIDER	
	DRAWN BY T.J.KIM		
FINISH White Chromate	SCALE 1/1	UNIT mm	
	A3		
DWG NO. PD00552-7/1			
REVISION 1		SHEET 1 of 1	