

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2020.07.09.
2	Housing 변경 (압출바 적용)	S.L.SON	J.H.YOUN	2020.08.14.
3	도장사양 및 기구변경 및 M5.0 TAP 추가	K.S.KIM	S.L.SON	2020.04.21.

* ELECTRICAL SPECIFICATIONS

Frequency Range : 600~5500 MHz

Insertion Loss (Max.) : 4.0dB

V.S.W.R (Max.) : 1.4 : 1

Isolation (Min.) : 18.0dB

Phase Unbalance (Max.) : 8.0°

Power Handling (Max.) : Splitting 50.0W

Combining 6W

PIM(@43dBm 2Tone CDMA) : 3th -120dBc

Impedance : 50Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6N01 T5 (Powder Glossy (Munsell N6.5)

CONNECTORS : MBsBD (Binary Alloy)

CONNECTORS PINS : Beryllium Copper (Silver Plate)

INSULATORS : TEFLON

* OTHER SPECIFICATIONS

MARKING COLOR: BLACK

* ENVIRONMENTAL SPEC

- IP 67

--20 ~ +70 °C

* DETAIL LABEL





Serial No : YYMMNNNN

- YY : 제조 년

- MM : 제조 월


- NNNN : Serial No

[Date: 생산일 기준]

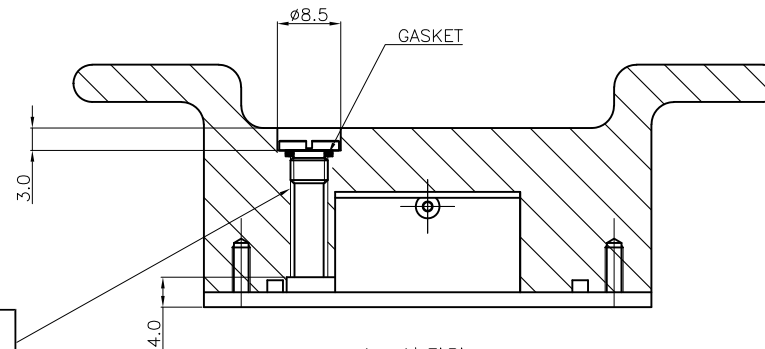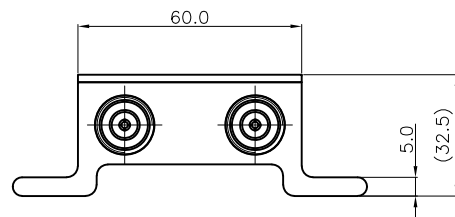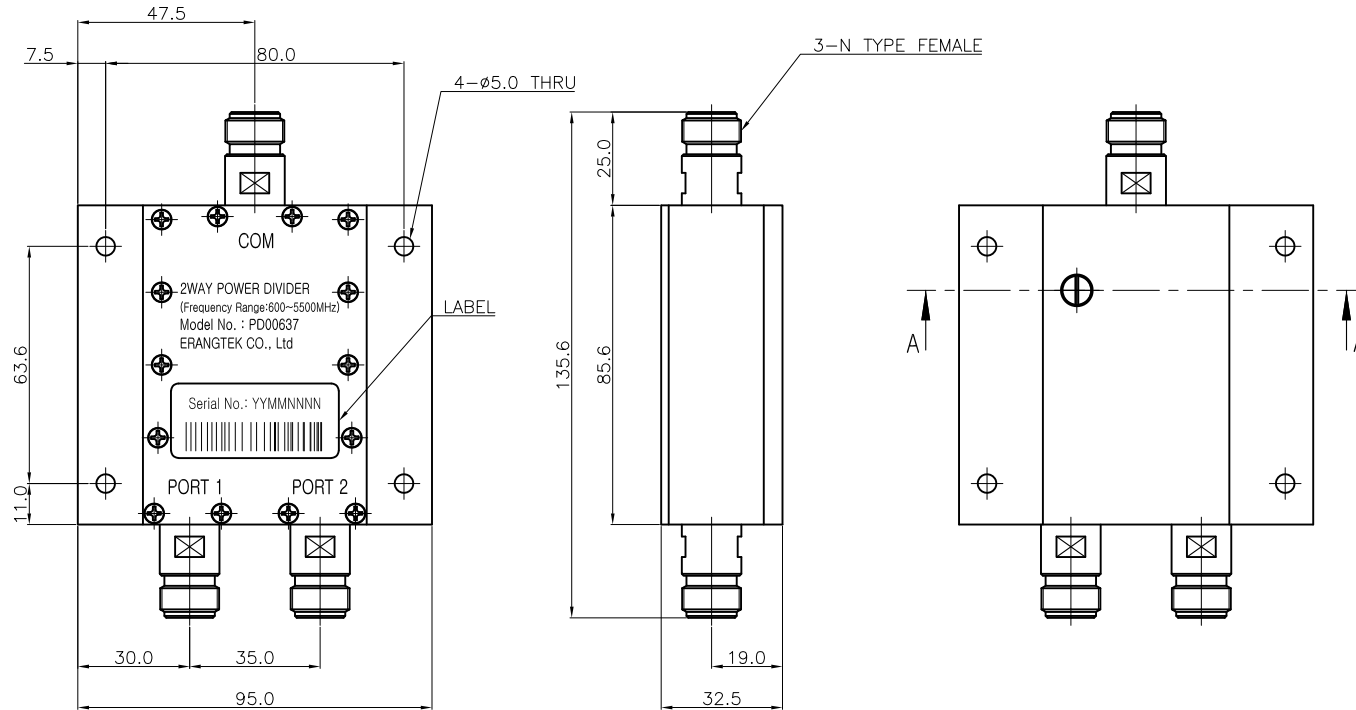

A - A' 단면

SCALE 2:1



M5-BOLT (Binary Alloy)

TOLERANCE	Decimal	DATE	2021. 05. 31.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	S.L.SON		
MATERIAL	±1°	CHECKED BY	S.L.SON		TITLE 2WAY POWER DIVIDER
	A6N01 T5	DRAWN BY	K.S.KIM		
FINISH	Powder Glossy (Munsell N6.5)	SCALE	1/1	UNIT	A2
			mm		
					REVISION 3 SHEET 1 of 1