

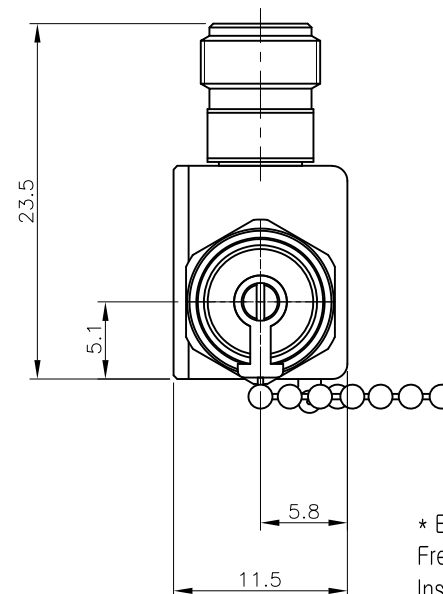


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	K.S.KIM	S.L.SON	2022.10.14.

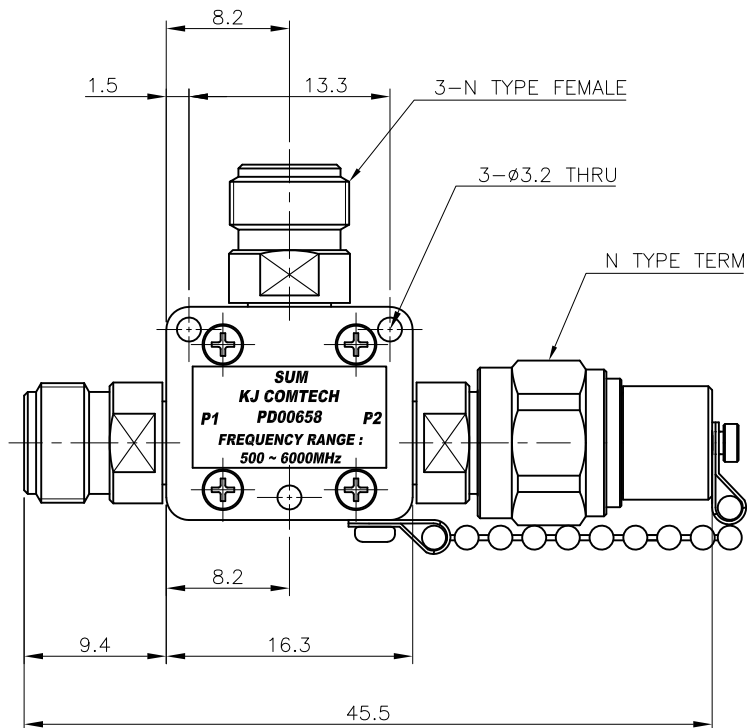

* 전체 주파수에 대한 Loss 편차는 추후 협의

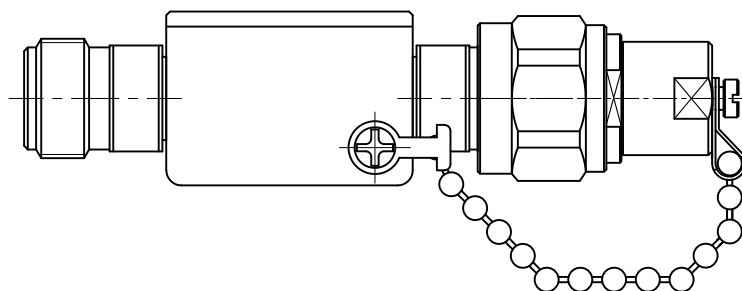

* ELECTRICAL SPECIFICATIONS
Frequency Range : 500~6000 MHz
Insertion Loss (Max.) : 6.5dB
V.S.W.R (Max.) : Input 1.4:1 / Output 1.6:1
Flatness (Max.) : 0.35dB
Power Handling (Max.) : 1.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 White Chromate
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

TOLERANCE	Decimal ±0.3	DATE 2022. 10. 14.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	TITLE
	Angle ±1°	APPROVED BY S.L.SON				
MATERIAL A6061 T6	CHECKED BY S.L.SON			2WAY POWER DIVIDER	DWG NO. PD00658-7/1	
	DRAWN BY K.S.KIM					REVISION 1
FINISH White Chromate	SCALE 1/1	UNIT mm		A4	SHEET 1 of 1	