


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	K.I.CHO	B.H.AN	2001.11.08.
2	[설변의뢰No.:200909-0008] 제조사에서 공급사로 표기 변경	K.I.CHO	J.H.YOUN	2009.09.10.
3	[설변의뢰No.:201205-0004] LTE-A 주파수 대역추가	I.C.KIM	J.H.YOUN	2012.05.21.
4	출력부 길이변경	S.L.SON	J.H.YOUN	2013.07.26.
5	외형 축소건	S.L.SON	J.H.YOUN	2014.10.21

3-N TYPE FEMALE

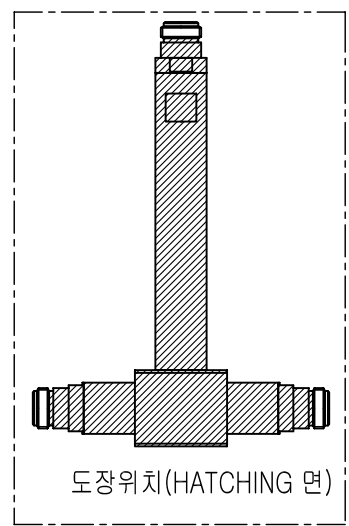

도장위치(HATCHING 면)

- * ELECTRICAL SPECIFICATIONS

Frequency Range : 819.0 ~ 960.0MHz
1710.0~1870.0MHz
1885.0 ~ 2170.0MHz
2300.0 ~ 2400.0MHz
2500.0 ~ 2690.0MHz

Insertion Loss (Max.) : 3.3dB
Input V.S.W.R (Max.) : 1.2 : 1
PIM (Max.) : 3th -150.0dBc
(@43.0dBm 2Tone)
Power Handling (Max.) : 100.0W
Impedance : 50 ± 5Ω
- * MECHANICAL SPECIFICATIONS

HOUSING : A6061 (샌드#20 KJ컴텍 Texture,
Lucoat SR 브라운 EM 4133무광)
CONNECTORS : MBsBD (SUCO Plate)
CONNECTORS PINS : Beryllium Copper (Silver Plate)
INSULATORS : TEFLON

TOLERANCE	Decimal ±0.1	DATE	2014. 10. 21.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	J.H.YOUN	
MATERIAL	A6061	CHECKED BY	T.J.KIM	TITLE 2WAY POWER SPLITTER
		DRAWN BY	S.L.SON	
FINISH	주기란 참고	SCALE	1/1	UNIT
		mm		
		A3	DWG NO.	PS00008-6/5
		REVISION	5	SHEET 1 of 1