


REVISION		
REV	DESCRIPTION	DATE
IR	Initial Registration	2009.08.17.

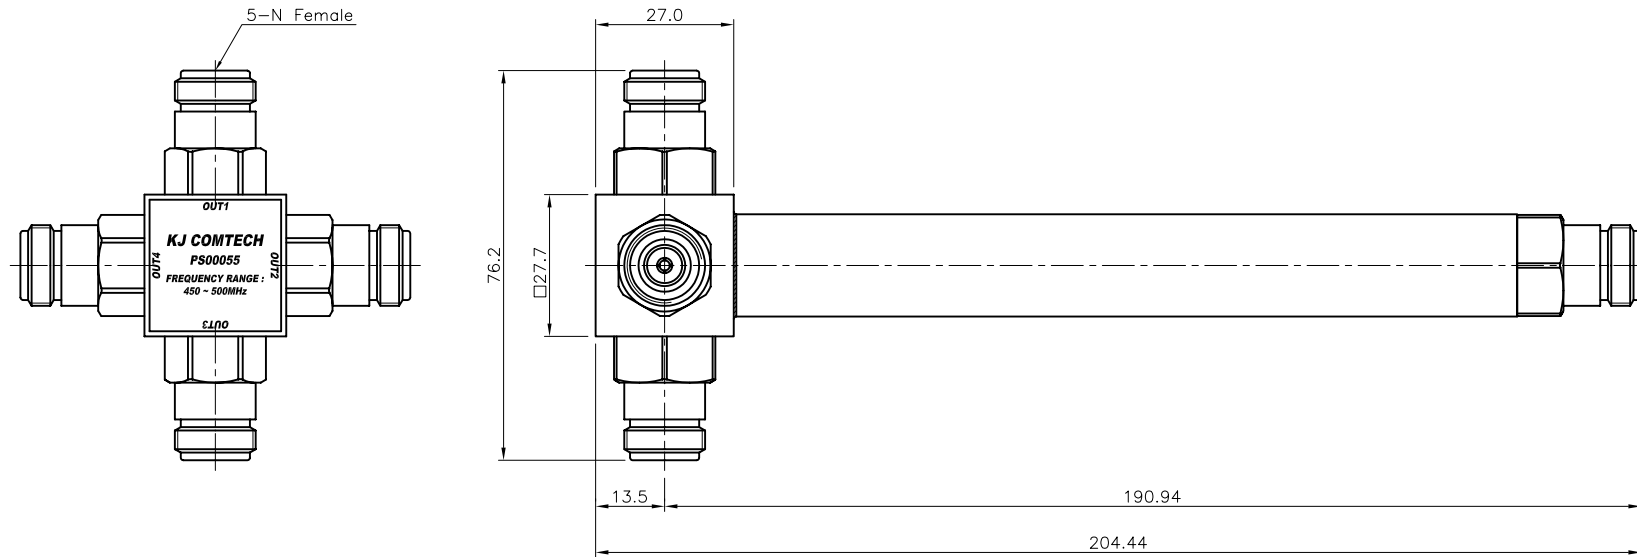

* ELECTRICAL SPECIFICATIONS
Frequency Range : 450.0 ~ 500.0MHz
Insertion Loss (Max.) : 6.3dB
V.S.W.R (Max.) : 1.3 : 1
Power Handling (Max.) : 500.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
BODY : MBsBD (Nickel Plate)
CONNECTORS : MBsBD (SUCO Plate)
CONNECTORS PINS : Beryllium Copper (Silver Plate)
INSULATORS : TEFLON

TOLERANCE	Decimal ±0.3	DATE 2009. 08. 17.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY J.H.YOUN	
MATERIAL MBsBD		CHECKED BY M.H.LEE	TITLE 4WAY POWER SPLITTER
		DRAWN BY K.I.CHO	
FINISH	SCALE 1/1	UNIT mm	 DWG NO. PS00055-7/1 REVISION I R SHEET 1 of 1