
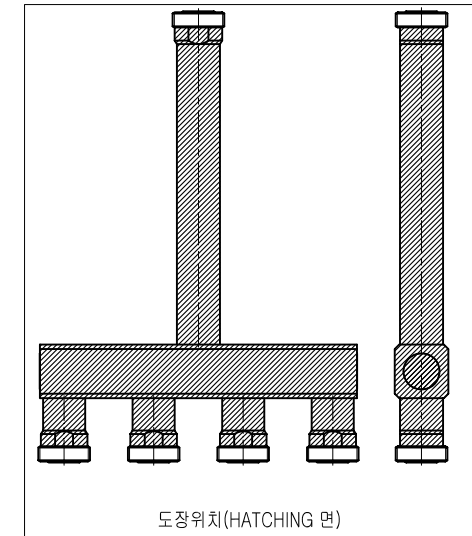
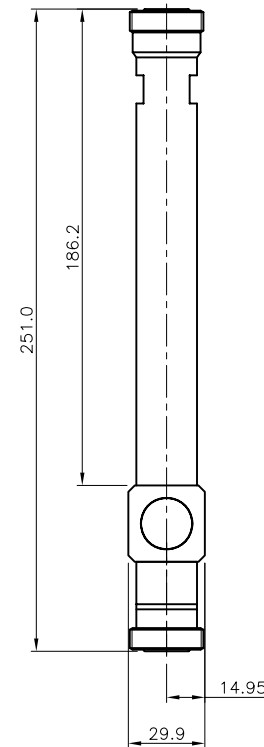


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	K.I.CHO	J.H.YOUN	2010.01.13.
2	업체 요구로 인한 형상 변경	K.I.CHO	J.H.YOUN	2010.03.24.
3	도장추가 DIC-582(Black)	I.C.KIM	J.H.YOUN	2012.03.19.
4	[설번의뢰No.:201112-0007] LTE 대역 주파수 변경	I.C.KIM	J.H.YOUN	2012.12.29.
5	원가절감형 재질변경	S.L.SON	J.H.YOUN	2013.07.16.
6	출력부 간격변경	S.L.SON	J.H.YOUN	2013.11.01.
7	출력부 길이변경	T.J.KIM	J.H.YOUN	2013.12.11.

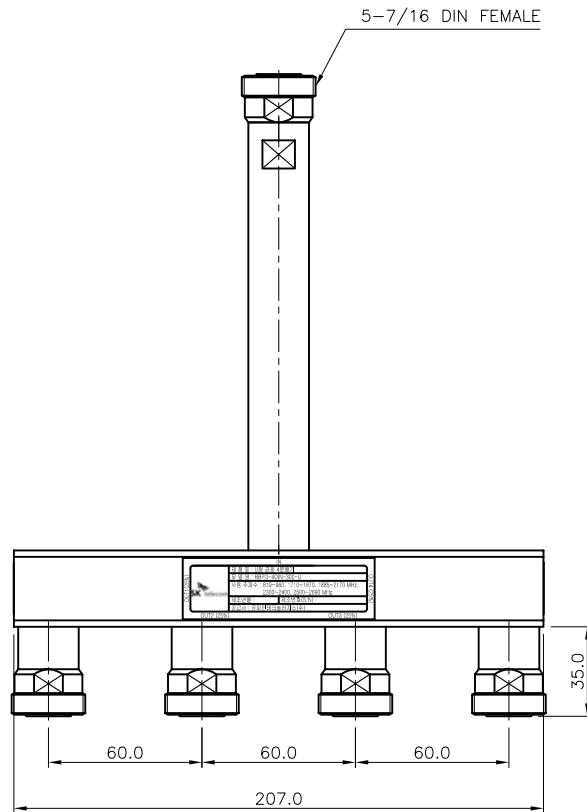

* ELECTRICAL SPECIFICATIONS

Frequency Range : 819.0 ~ 960.0MHz
 1710.0 ~ 1870.0MHz, 1885.0 ~ 2170.0MHz
 2300.0 ~ 2400.0MHz, 2500.0 ~ 2690.0MHz
 Insertion Loss (Max.) : 7.0dB
 Input V.S.W.R (Max.) : 1.2 : 1
 PIM (Max.) : 3th -150.0dBc (CDMA, WCDMA, WiBro)
 (@43.0dBm 2Tone)
 Power Handling (Max.) : 300.0W
 Impedance : 50.0Ω
 Temperature Range : -40 ~ +70°C

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 (샌드#20 KJ쿠팅 Texture,
 Lucoat SR 브라운 EM 4133무광)
 CONNECTORS : MBsBD (SUCO Plate)
 CONNECTORS PINS : Beryllium Copper (Silver Plate)
 INSULATORS : TEFLON

TOLERANCE	Decimal ±0.3	DATE 2013. 12. 11.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY J.H.YOUN	
MATERIAL MBsBD	FINISH 주기관 참고	CHECKED BY S.L.SON	TITLE 4WAY POWER SPLITTER
		CHECKED BY T.J.KIM	
FINISH 주기관 참고	SCALE 2/1	DRAWN BY J.H.YOUN	DWG NO. PS00069-6/7 REVISION 7 SHEET 1 of 1
		UNIT mm	