
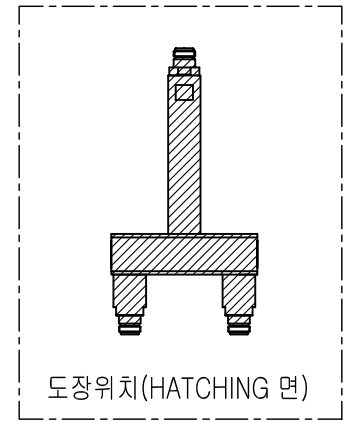


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2014.04.03.
2	외관 축소건	T.J.KIM	J.H.YOUN	2015.01.13.
3	Catalogue	S.L.SON	J.H.YOUN	2015.10.19.

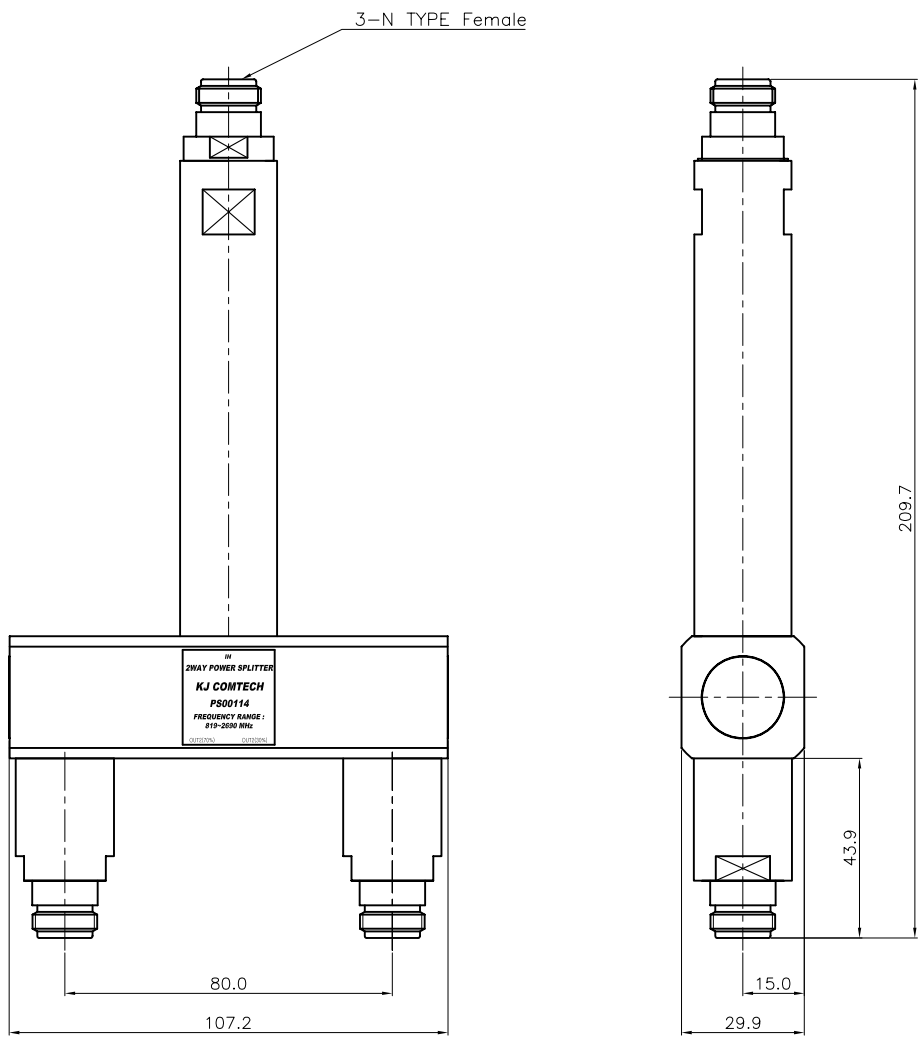

*** ELECTRICAL SPECIFICATIONS**
Frequency Range : 819.0 ~ 960.0MHz
1710.0 ~ 1870.0MHz
1885.0 ~ 2170.0MHz
2300.0 ~ 2400.0MHz
2500.0 ~ 2690.0MHz

Insertion Loss (Max.) : 2.1 / 5.7 dB
Input V.S.W.R (Max.) : 1.2 : 1
PIM (Max.) : 3th -150.0dBc
(@43.0dBm 2Tone)

Power Handling (Max.) : 300.0W
Impedance : 50Ω

*** MECHANICAL SPECIFICATIONS**
HOUSING : A6061 (샌드#20 KJ컴텍 Texture,
Lucoat SR 브라운 EM 4133무광)
CONNECTORS : MBsBD (SUCO Plate)
CONNECTORS PINS : Beryllium Copper (Silver Plate)
INSULATORS : TEFLON

TOLERANCE	Decimal ±0.3	DATE	2015. 10. 19.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	J.H.YOUN	
MATERIAL	MBsBD	CHECKED BY	T.J.KIM	KJ COMTECH CO.,LTD. TITLE 2WAY UNEQUAL POWER SPLITTER (N-TYPE CONNECTOR)
		DRAWN BY	S.L.SON	
FINISH	주기란 참조	SCALE	4/5	A3 DWG NO. PS00114-6/3 REVISION 3 SHEET 1 of 1
		UNIT	mm	