
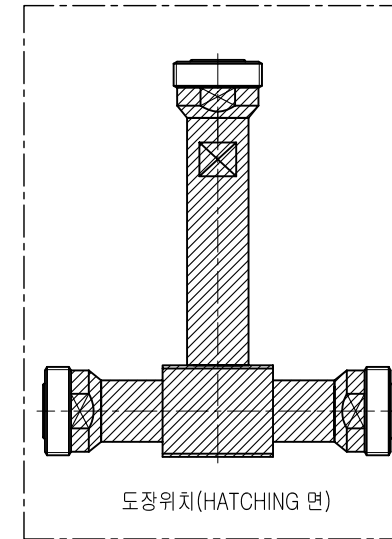


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	T.J.KIM	J.H.YOUN	2015.06.03.

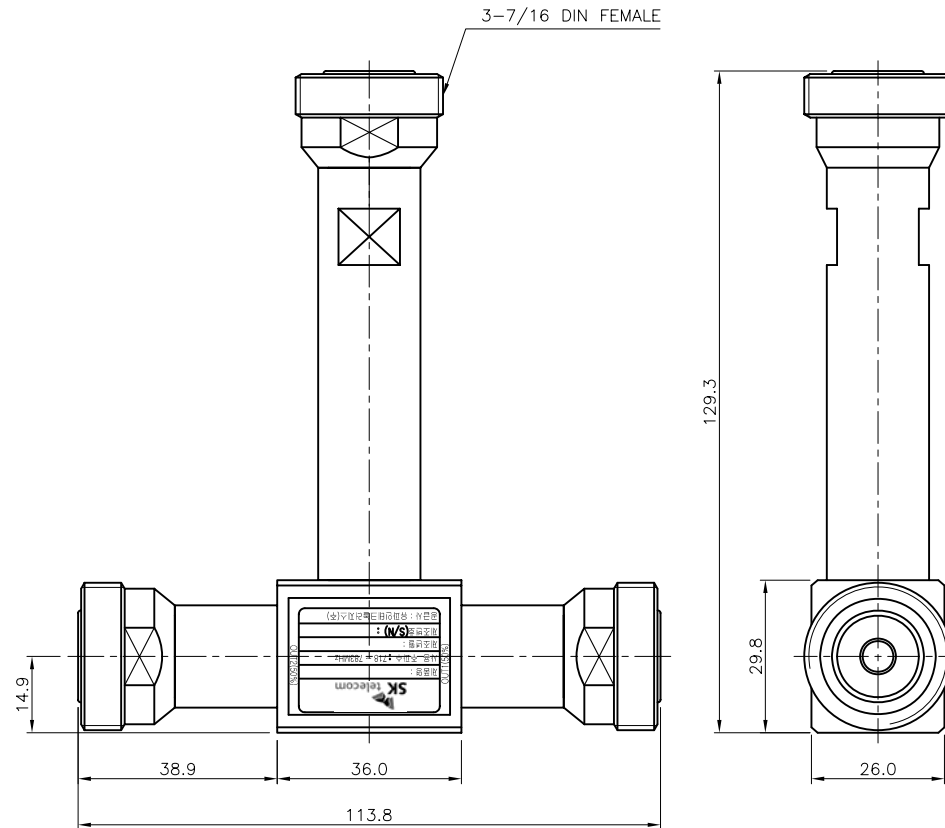

* ELECTRICAL SPECIFICATIONS
Frequency Range : 718 ~ 783MHz
Insertion Loss (Max.) : 3.2dB
Input V.S.W.R (Max.) : 1.2 : 1
PIM (Max.) : 3th -150.0dBc (@43.0dBm 2Tone)
Power Handling (Max.) : 500.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 (Lucoat SR BROWN, POWDER, Texture)
CONNECTORS : MBsBD(C3604BD-F) (SUCO Plate)
CONNECTORS PINS : Beryllium Copper (Silver Plate)
INSULATORS : TEFLON

TOLERANCE	Decimal ±0.3	DATE	2015. 06. 03.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	J.H.YOUN	
MATERIAL	A6061	CHECKED BY	S.L.SON	TITLE 2WAY POWER SPLITTER
		DRAWN BY	T.J.KIM	
FINISH	주기관 참고	SCALE	1/1	DWG NO. PS00123-6/1 REVISION 1 SHEET 1 of 1
		UNIT	mm	