
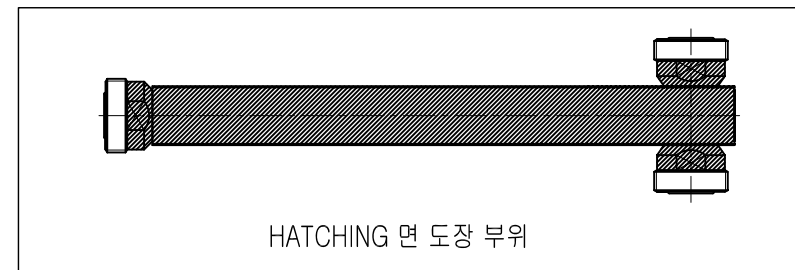


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	3WAY 사각 BODY 기준으로 설계진행.(Catalogue)	S.L.SON	J.H.YOUN	2015.07.24.

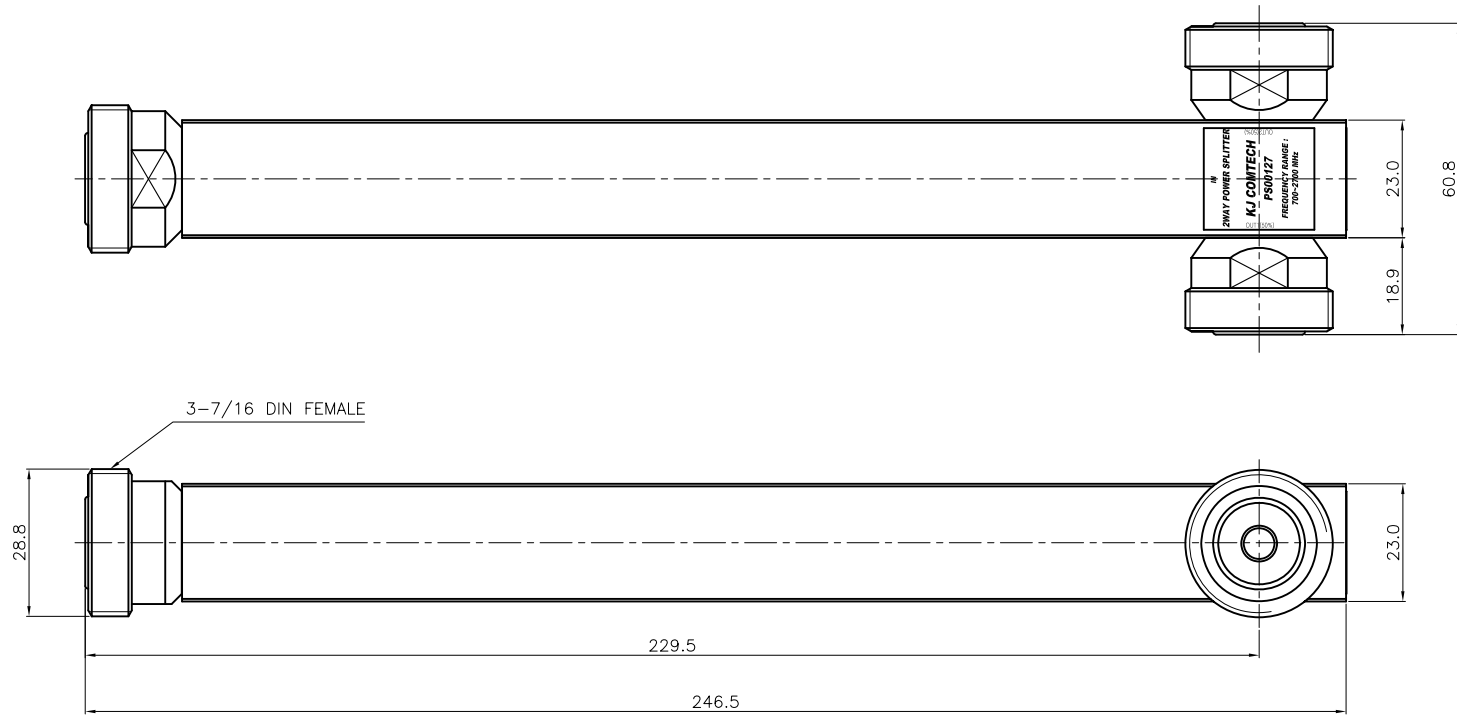

* ELECTRICAL SPECIFICATIONS
Frequency Range : 600 ~ 3600 MHz
Insertion Loss (Max.) : 3.3dB
Input V.S.W.R (Max.) : 1.2 : 1
PIM (Max.) : 3th -150.0dBc
(@43.0dBm 2Tone)
Power Handling (Max.) : 300.0W
Impedance : 50 Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 (LUCOAT SR BROWN, Liquid Matt Texture)
CONNECTORS : MBsBD(C3604BD-F) (SUCO Plate)
CONNECTORS PINS : Beryllium Copper (Silver Plate)
INSULATORS : TEFLON

* ENVIRONMENTAL SPECIFICATIONS
-40~+60 Degree
IP67

TOLERANCE	Decimal	DATE	2015. 07. 27.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN		
MATERIAL	±1°	CHECKED BY	T.J.KIM		TITLE 2WAY POWER SPLITTER
	A6061	DRAWN BY	S.L.SON		
FINISH	Lucoat SR Brown	SCALE	1/1	UNIT	A3
			mm		
		REVISION	1	SHEET	1 of 1