
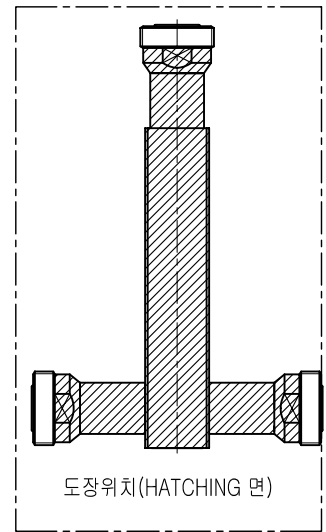
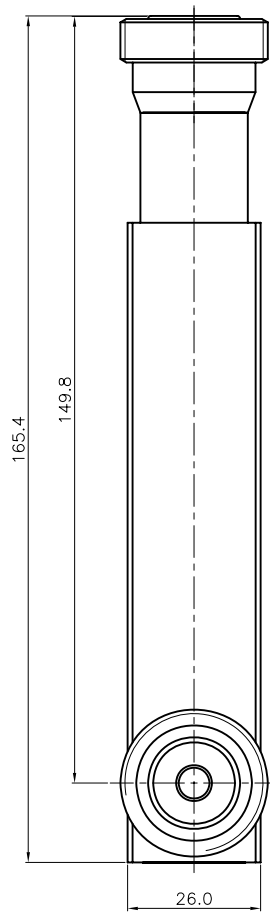


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	3WAY 사각 BODY 기준으로 설계진행.(Catalogue)	S.L.SON	J.H.YOUN	2015.07.24.

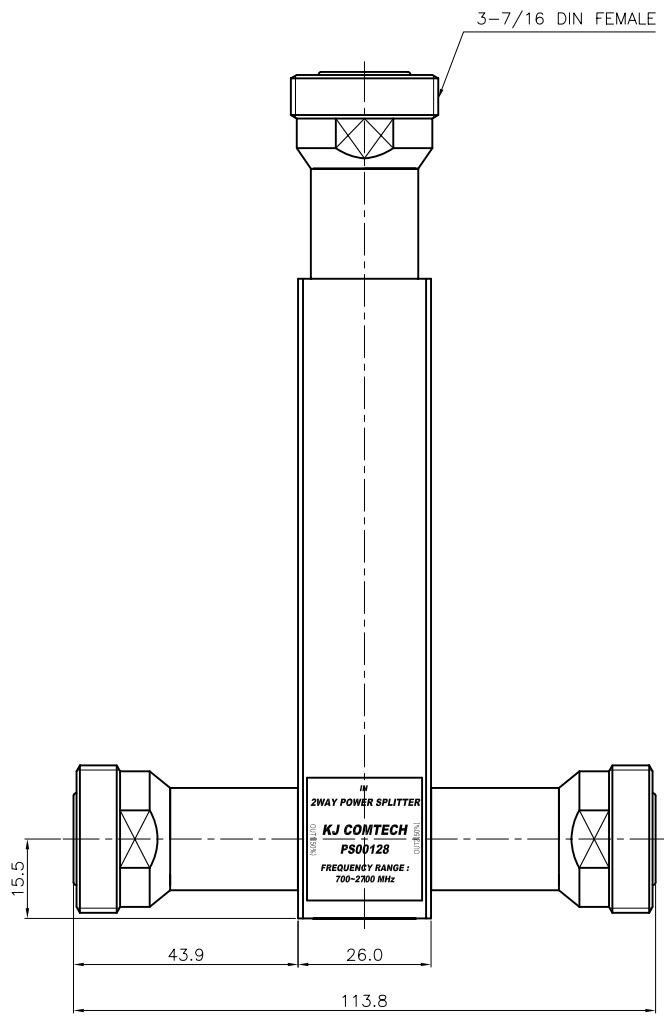

- * ELECTRICAL SPECIFICATIONS
- Frequency Range : 700~2700MHz
- Insertion Loss (Max.) : 3.3dB
- Input V.S.W.R (Max.) : 1.2 : 1
- PIM (Max.) : 3th -150.0dBc (@43.0dBm 2Tone)
- Power Handling (Max.) : 300.0W
- Impedance : 50Ω ± 5Ω
- * MECHANICAL SPECIFICATIONS
- HOUSING : A6061 (DIC-547, Liquid Matt Texture)
- CONNECTORS : MBsBD (C3604BD-F) (SUCO Plate)
- CONNECTORS PINS : Beryllium Copper (Silver Plate)
- INSULATORS : TEFLON

TOLERANCE	Decimal ±0.3	DATE	2015. 07. 24.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	J.H.YOUN	
MATERIAL	A6061	CHECKED BY	T.J.KIM	TITLE 2WAY POWER SPLITTER
		DRAWN BY	S.L.SON	
FINISH	DIC-547 (Ivory)	SCALE	1/1	DWG NO. PS00128-6/1
		UNIT	mm	REVISION 1 SHEET 1 of 1