



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Catalogue	S.L.SON	J.H.YOUN	2015.09.14.
2	AWSI항 (PIMD,도장,SIZE 변경)	S.L.SON	J.H.YOUN	2016.05.12.

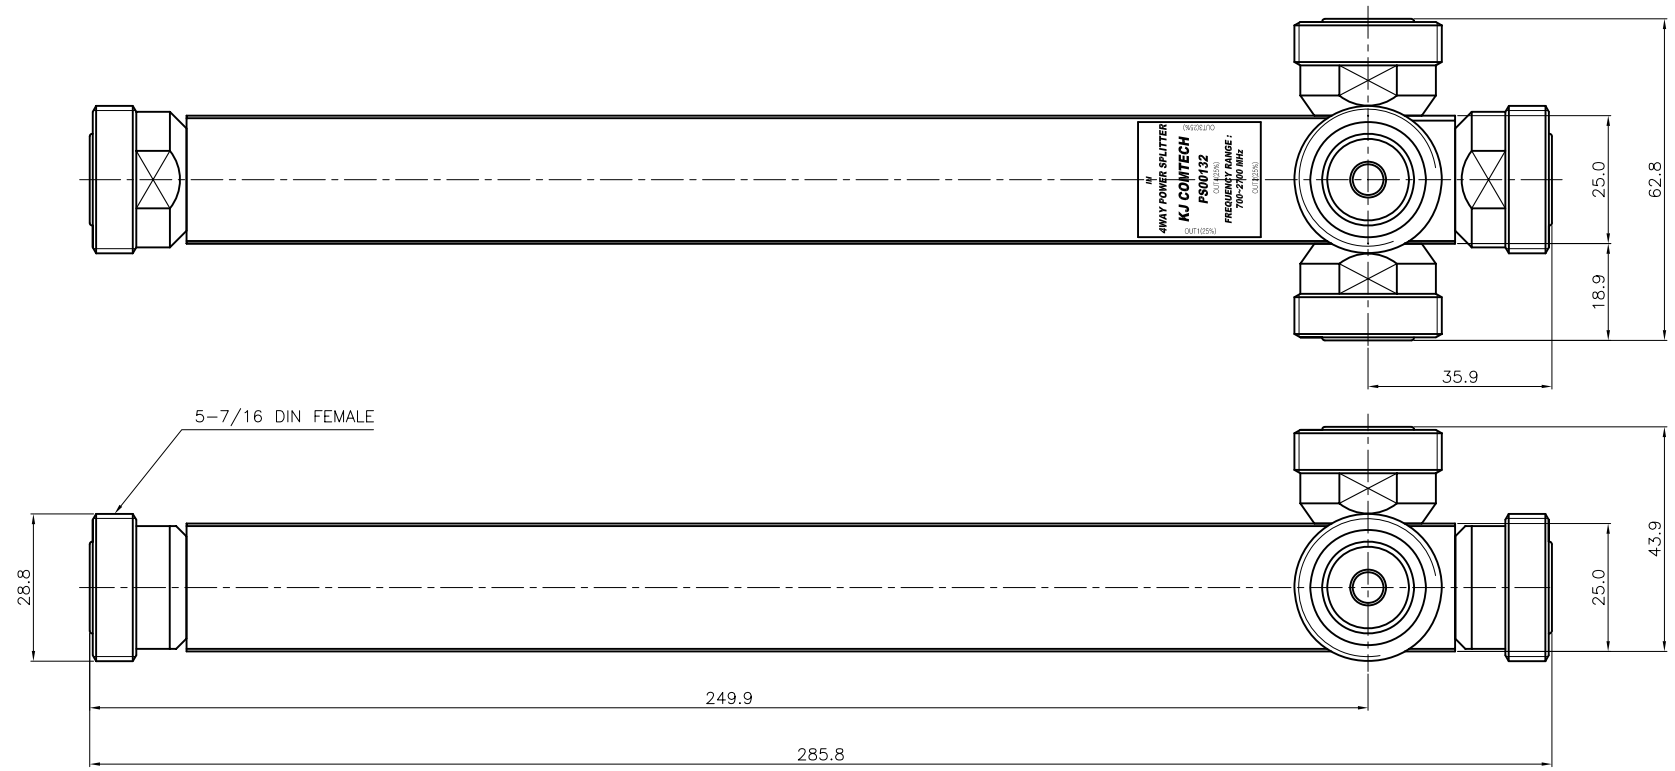

* ELECTRICAL SPECIFICATIONS
 Frequency Range : 700 ~ 2700 MHz
 Insertion Loss (Max.) : 6.6dB
 Input V.S.W.R (Max.) : 1.2 : 1
 PIM (Max.) : 3th -160.0dBc
 (@43.0dBm 2Tone)
 Power Handling (Max.) : 300.0W
 DC Power Rating : 30V/20A(@ Input Port)
 Impedance : 50 Ω

* MECHANICAL SPECIFICATIONS
 HOUSING : A6061 (DIC-547, Liquid Matt Texture)
 CONNECTORS : MBsBD(C3604BD-F) (SUCO Plate)
 CONNECTORS PINS : Beryllium Copper (Silver Plate)
 INSULATORS : TEFLON

* ENVIRONMENTAL SPECIFICATIONS
 -40~+70°C
 IP68

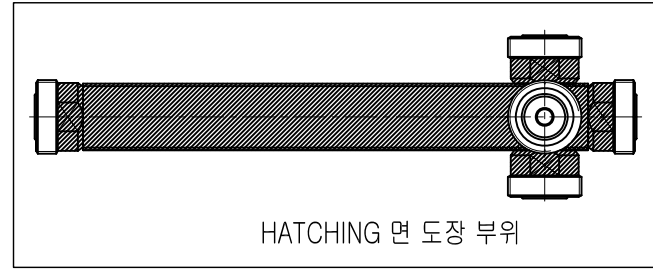

TOLERANCE	Decimal ±0.3	DATE 2016. 05. 12.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle ±1°	APPROVED BY J.H.YOUN		
MATERIAL A6061	FINISH DIC-547(Ivory)	CHECKED BY T.J.KIM	TITLE 4WAY POWER SPLITTER	
		DRAWN BY S.L.SON		
SCALE 1/1		UNIT mm	A3	
			DWG NO. PS00132-6/2	
			REVISION 2	SHEET 1 of 1