
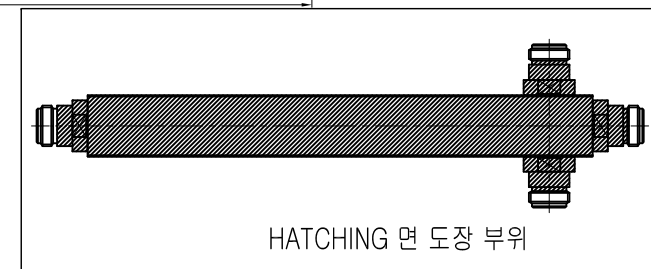


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Catalogue	S.L.SON	J.H.YOUN	2015.09.14.

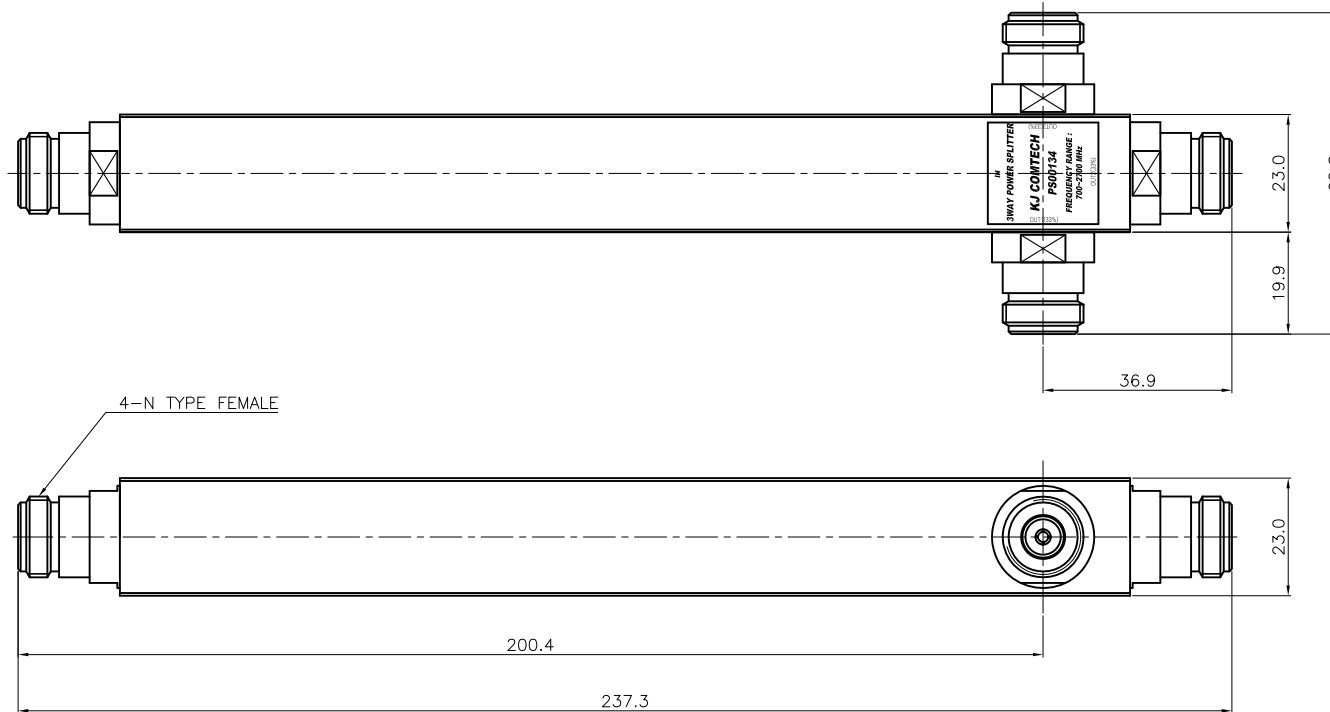

* ELECTRICAL SPECIFICATIONS
 Frequency Range : 700 ~ 2700 MHz
 Insertion Loss (Max.) : 5.2dB
 Input V.S.W.R (Max.) : 1.2 : 1
 PIM (Max.) : 3th -150.0dBc
 (@43.0dBm 2Tone)
 Power Handling (Max.) : 200.0W
 Impedance : 50 Ω

* MECHANICAL SPECIFICATIONS
 HOUSING : A6061 (DIC-547, Liquid Matt Texture)
 CONNECTORS : MBsBD(C3604BD-F) (SUCO Plate)
 CONNECTORS PINS : Beryllium Copper (Silver Plate)
 INSULATORS : TEFLON

* ENVIRONMENTAL SPECIFICATIONS
 -40~+70°C
 IP68

TOLERANCE	Decimal	DATE	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle	2015. 09. 14.		
MATERIAL	A6061	APPROVED BY	TITLE 3WAY POWER SPLITTER	
		CHECKED BY		
FINISH	DIC-547(Ivory)	DRAWN BY	DWG NO. PS00134-6/1 REVISION 1 SHEET 1 of 1	
		SCALE 1/1		