
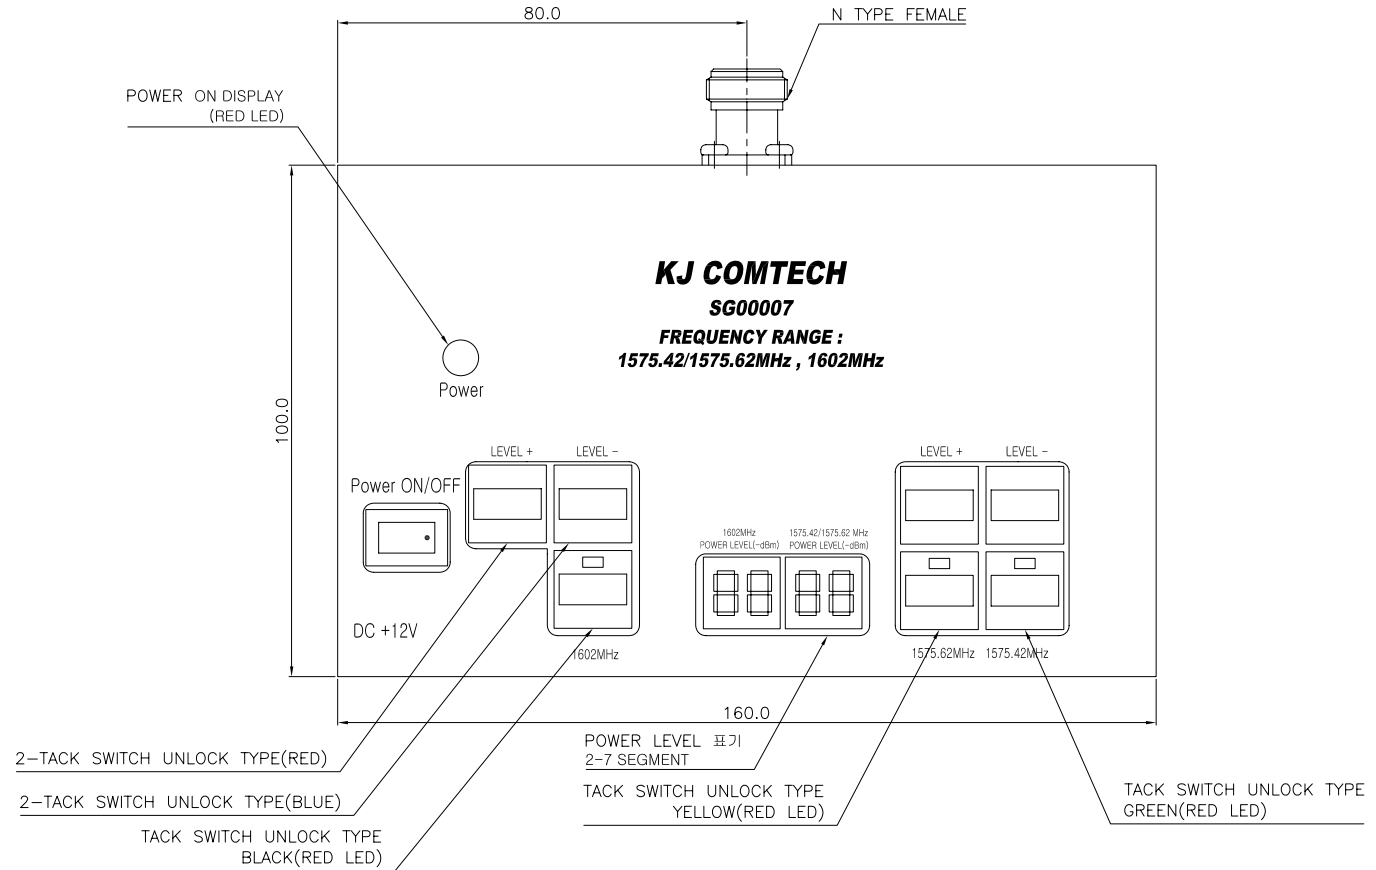


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	I.C.KIM	J.H.YOUN	2011.10.08.

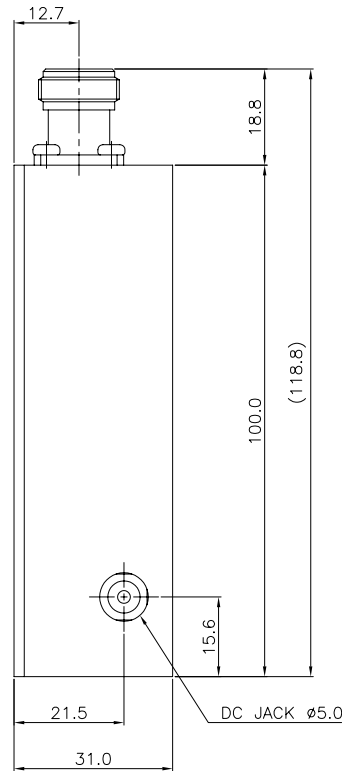

* ELECTRICAL SPECIFICATIONS

Frequency Range : 1575.42/1575.62MHz
1602MHz

Output Power level (Max.) : -60 dBm
Variable Power Range : ± 10 dB (1dB Step)
Error Range of Each Power Step : ± 0.5 dB
Impedance : 50 Ω
Input DC Voltage : 12V

* MECHANICAL SPECIFICATIONS

HOUSING : A6062 (White Chromate)
CONNECTORS : MBsBD (Ni Plate)
CONNECTORS PINS : Beryllium Copper (Silver Plate)
INSULATORS : TEFLON

TOLERANCE	Decimal ± 0.1	DATE	2011. 10. 08.
	Angle $\pm 1^\circ$	APPROVED BY	J.H.YOUN
MATERIAL	MBsBD	CHECKED BY	I.C.KIM
		DRAWN BY	J.H.YOUN
FINISH	White Chromate	SCALE	1/1
		UNIT	mm



RF & MICROWAVE
TECHNOLOGY
Tel : 82-32-347-8015
Fax : 82-32-347-8017

TITLE

Signal Generator

A3

DWG NO.	SG00007-7/1
REVISION	1
SHEET	1 of 1