


REVISION		
REV	DESCRIPTION	DATE
1R	Initial Registration	2010.06.21.

ELECTRICAL SPECIFICATIONS		
1	FREQUENCY RANGE	DC ~ 12.4GHz
2	IMPEDANCE	50Ω NOMINAL
3	V.S.W.R	1.10 : 1 (Max) at 6GHz 1.20 : 1 (Max) at 12.4GHz
4	POWER	5 Watt

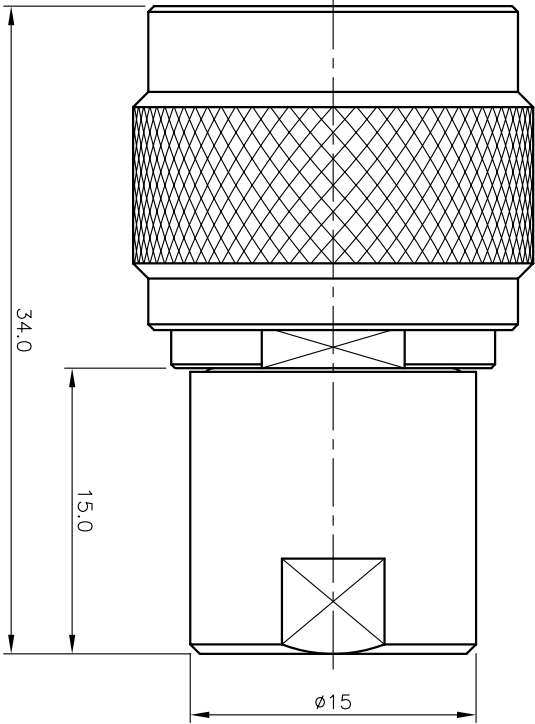

12	LABEL	1			DLA00311-N/2
11	ROD RESISTOR	1			DRE00068-N/1
10	O RING	1	SILICONE RUB		DGK00032-N/1
9	GASKET	1	SILICONE RUB		DGK00013-N/1
8	SPRING RING	1	MBSBD	Nickel Plate	DSR00020-5/1
7	CAP	1	MBSBD	Nickel Plate	DCU00059-5/1
6	INSERT(B)	1	MBSBD	Nickel Plate	DIS00171-5/1
5	INSERT(A)	1	MBSBD	Nickel Plate	DIS00165-5/2
4	BACK NUT	1	MBSBD	Nickel Plate	DBN00171-5/1
3	INSULATOR	1	TEFLON		DIN01753-N/1
2	CONTACT	1	MBSBD	Gold Plate	DCT02250-5/1
1	BODY	1	MBSBD	Nickel Plate	DBD02725-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	±0.1
	Angle	±1°
MATERIAL		
FINISH		
DATE		2010. 06. 21.
APPROVED BY		Y.H.CHOI
CHECKED BY		
DRAWN BY		
SCALE	UNIT	
2.5/1	mm	
TITLE		N50-P-DUMMY
DWG NO.		TM00102-7/2
REVISION		1 R
SHEET		1 of 1



RF & MICROWAVE
TECHNOLOGY
Tel : 82-32-347-8015
Fax : 82-32-347-8017