
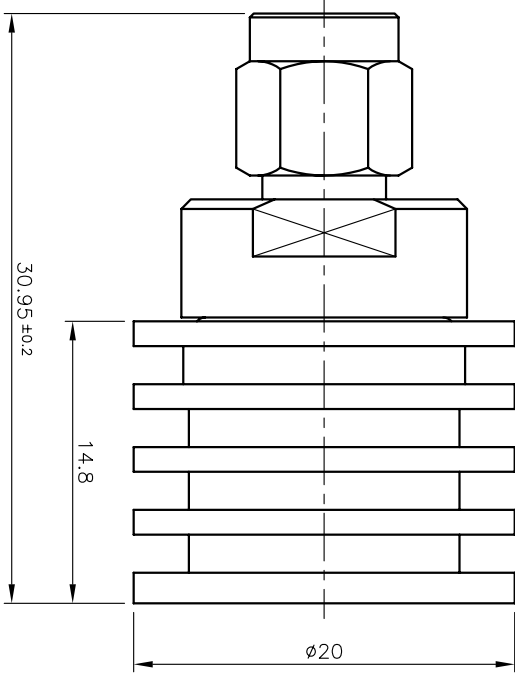


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1R	Initial Registration		C.Y.H.	2010.08.23.

ELECTRICAL SPECIFICATIONS	
1	FREQUENCY RANGE DC ~ 6GHz
2	IMPEDANCE 50Ω NOMINAL
3	V.S.W.R 1.10 : 1 (Max) at 3GHz 1.20 : 1 (Max) at 6GHz
4	POWER 5 Watt

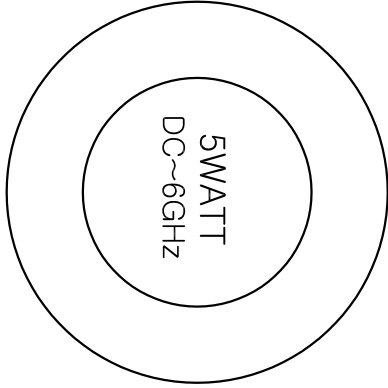

12	LABEL	1			DLA00350-N/1
11	ROD RESISTOR	1			DRE00068-N/1
10	O RING	1	SILICONE RUB		DGK00032-N/1
9	GASKET	1	SILICONE RUB		DGK00004-N/1
8	SPRING RING	1	SUS	Passivated	DSR00002-5/1
7	HEAT SINK	1	AL6061	Black Anodize	DHS00015-5/1
6	INSERT(B)	1	MBSBD	Nickel Plate	DIS00171-5/1
5	INSERT(A)	1	MBSBD	Nickel Plate	DIS00165-5/2
4	CAP	1	MBSBD	Gold Plate	DCU00005-5/1
3	INSULATOR	1	TEFLON		DIN01828-N/1
2	CONTACT	1	MBSBD	Gold Plate	DCT02329-5/1
1	BODY	1	MBSBD	Gold Plate	DBD02815-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

DATE 2010. 08. 23.

Decimal
±0.1
TOLERANCE
Angle
±1°

APPROVED BY Y.H.CHOI

CHECKED BY

DRAWN BY

MATERIAL

SCALE 2.5/1 UNIT mm

KU CONTECH
RF & MICROWAVE TECHNOLOGY
Tel : 82-32-347-8015
Fax : 82-32-347-8017

TITLE

SMA50-P-DUMMY

DWG NO. TM00111-7/1

REVISION 1 R SHEET 1 of 1