


TM00128-7/2




N (J) 2W
DC ~ 6 GHz 1.2:1
L:31.7mm
BODY/Nickel PIN/Gold

| TM00128-7/2 | |
|----------------|--|
| Frequency | |
| Insertion Loss | |
| VSWR | |
| Impedance | <input checked="" type="checkbox"/> 50Ω <input type="checkbox"/> 75Ω |
| Temperature | -40°C ~ 125°C |

► NETWORK ANALYZER ► Test cable ► Test Adaptor

- ☐ E5071B (~8.5GHz)
☒ ZND (~8.5GHz)
☐ ZVA50 (~50GHz)
- ☒ N Male to SMA Male
10GHz Cable (CF00540-7/1)
☐ N Male to N Male
10GHz Cable (CF00539-7/1)
☐ 2.4mm Male to 2.4mm Male
50GHz Cable)

4/25/2023 1:54:35 AM
1328.5170K92-102503-Hn

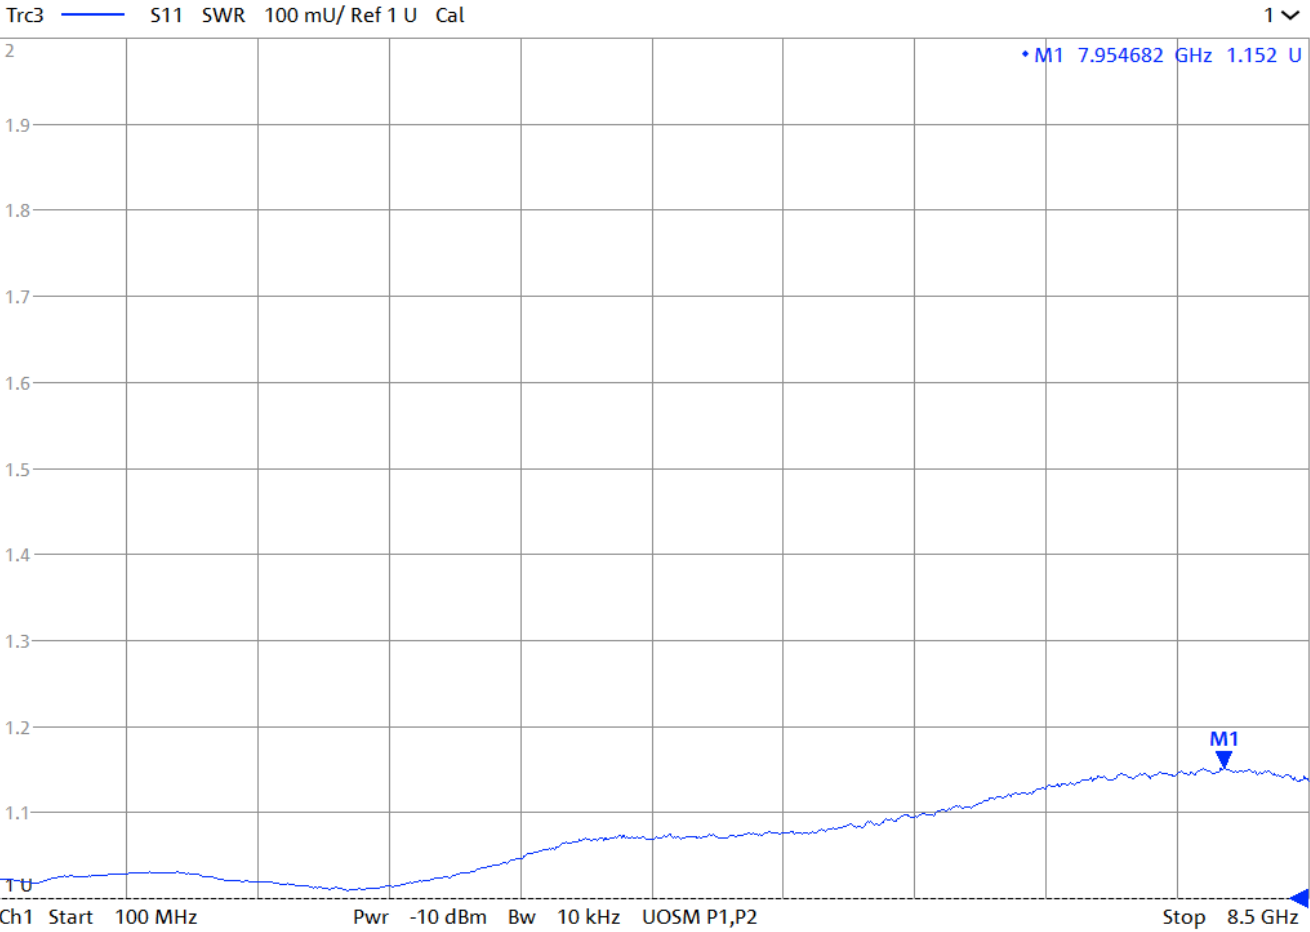

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3: Insertion Loss (S21)