


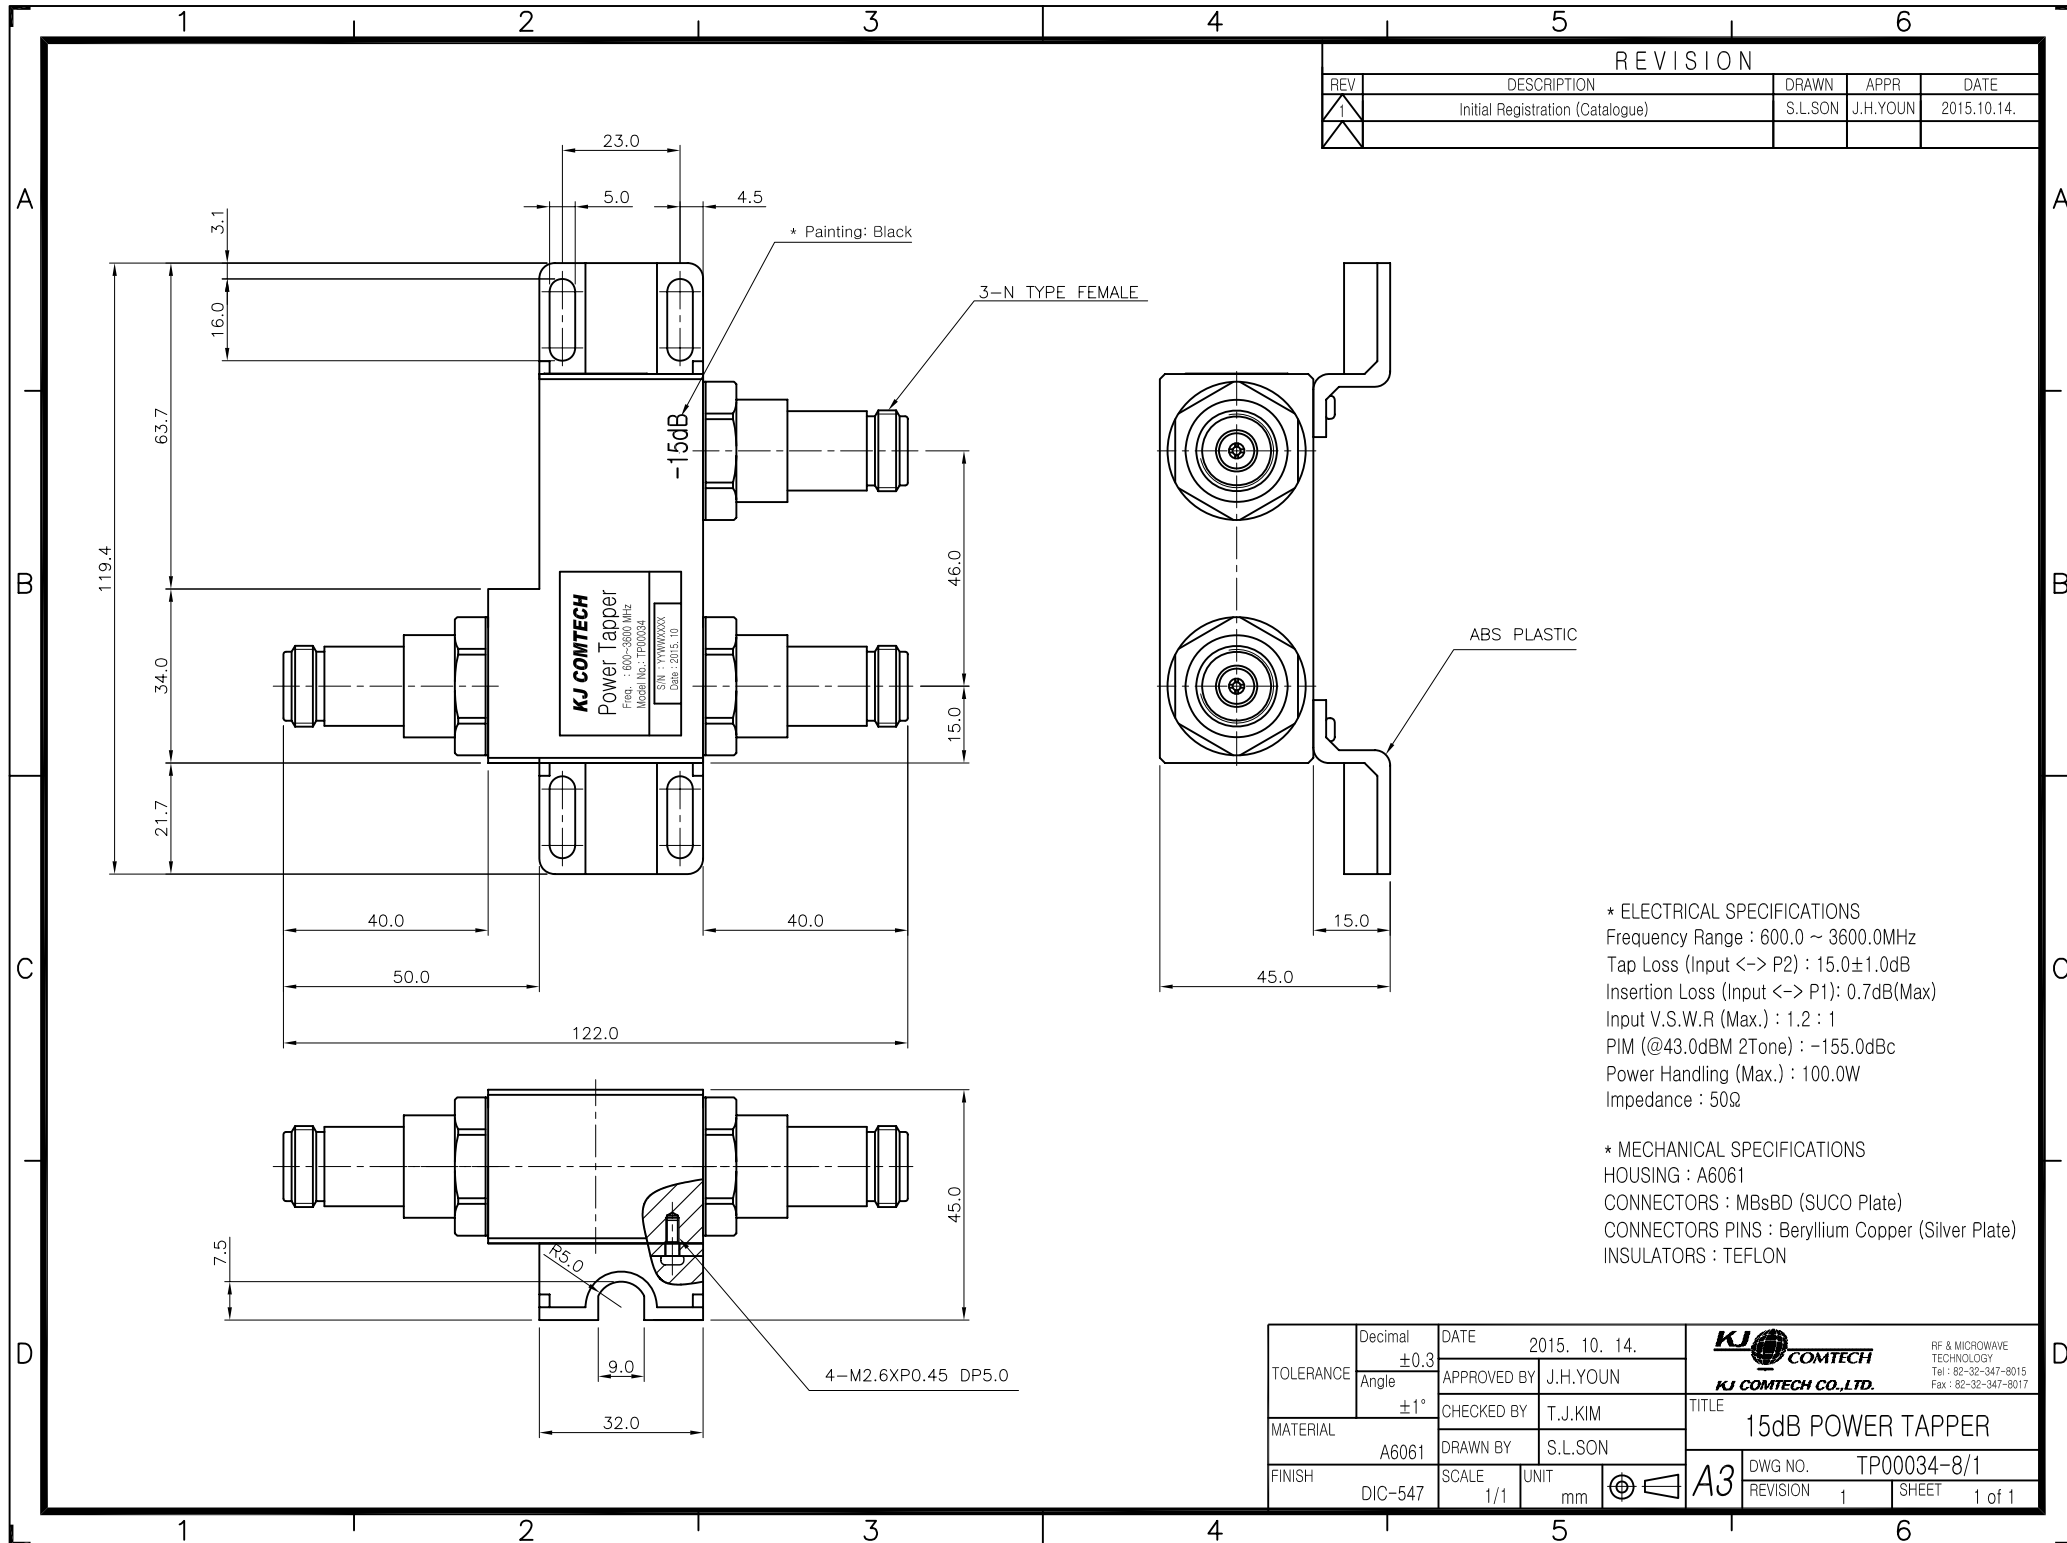

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration (Catalogue)	S.L.SON	J.H.YOUN	2015.10.14.

* ELECTRICAL SPECIFICATIONS

Frequency Range : 600.0 ~ 3600.0MHz

Tap Loss (Input <-> P2) : 15.0±1.0dB

Insertion Loss (Input <-> P1): 0.7dB(Max)

Input V.S.W.R (Max.) : 1.2 : 1

PIM (@43.0dBm 2Tone) : -155.0dBc

Power Handling (Max.) : 100.0W

Impedance : 50Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061

CONNECTORS : MBsBD (SUCO Plate)

CONNECTORS PINS : Beryllium Copper (Silver Plate)

INSULATORS : TEFLON

TOLERANCE	Decimal	DATE	2015. 10. 14.
	Angle	APPROVED BY	J.H.YOUN
MATERIAL	±0.3	CHECKED BY	T.J.KIM
	±1°	DRAWN BY	S.L.SON
FINISH	A6061	SCALE	1/1
	DIC-547	UNIT	mm



RF & MICROWAVE
TECHNOLOGY
Tel : 82-32-347-8015
Fax : 82-32-347-8017

TITLE
15dB POWER TAPPER

DWG NO. TP00034-8/1

REVISION 1 SHEET 1 of 1